

FEATURES:

- **ANSI/ISO Standards**
7810, 7811 1/5, 7812, 7813
 - **New Design**
The decoder can be easily attached to most computer keyboards, or to any flat surface.
 - **Supported Bar Codes & Scanners**

Code 39	Pen Wand scanners
Extended Code 39	CCD scanners
Interleaved 2 of 5 Code	Laser scanners
2 of 5 Code	Barcode slot reader
UPC/EAN/JAN Codes	
Standard Codabar	
Code 11	
Code 93	
Code 128	
- Single Track: Track1 or Track2 or Track3
 Dual Track: Track1 & 2 or Track2 & 3
 Three Track: Track1, 2 & 3

SPECIFICATIONS:


- Speed:**
 Card speed through the unit may vary from:
 3~125 ips at 75 bpi
 3~50 ips at 210 bpi
 3~30 ips for Bar Code Reader
- Connectors:**
 Input: DIN Female 6P
 Output: 9 pin D female (BMR41X)
 (requires interface cable)
 Power Input: 9V DC 300mA (BMR41X)
- Dimensions:**
 170mm(W), 42mm(H), 44m(D)
- Environment:**
 Operating Temp. 5~50 Degree C
 Storage Temp. -10~+65 Degree C
 Humidity 10~90%

MODEL NO.: BMR41X

- RS-232 Interface:**
- Switch Block Setting:**
 The mode of operation, baud rate, RS-232 communication parameters, and user protocol can be set through the switch block settings.

MODEL NO.: BMR43X

- Standard Keyboard Emulation:**
 PC AT/XT
- Call for other configurations:**
- LED Indicators:**
 READY Green
 ERROR Red

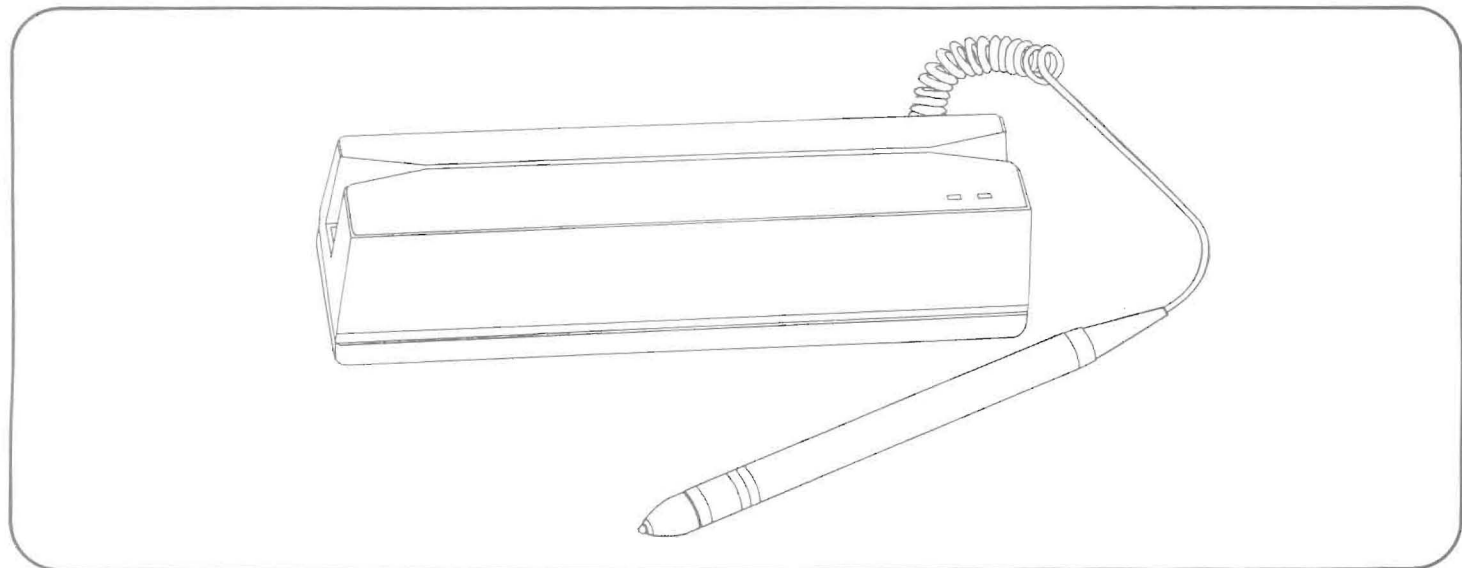

We welcome OEM inquiries

- ★ Custom design manufacturing is available.
- ★ Custom programming of the device is available.
- ★ Call factory for other configurations.



PROMAG



集佳有限公司
 GIGA-TMS INC.

Authorised/Sole Distributor

BBL COMPUTRADE