


BKTVUDE04

Cat.5e RJ-45 Unshielded Keystone Jack

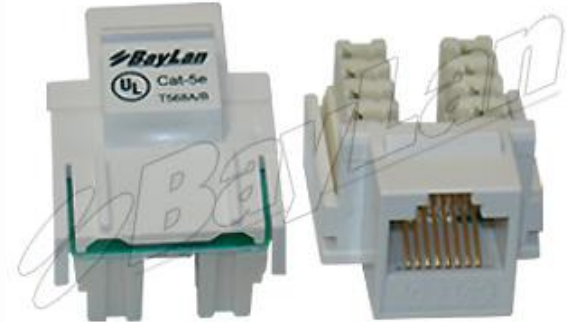

Industry standard:

- UL, Listed
- Meets FCC parts 68
- EN50173
- ISO/IEC 11801
- Meets EIA/TIA T568B: Cat.5e Hardware transmission Performance

Electrical:

- Current Rating: 1.5 Amps
- Insulation resistance: 500Mega-ohms min.
- Contact resistance: 20 Milli-ohms max.
- DC resistance: 0.1 ohms max
- Data transmission rates up to 100Mbps

Mechanical:

- Plug insertion life: 750 cycle min.
- Plug retention force: 30 lbs min.

Physical:

- IDC connector accepts 22-26 AWG solid wire
- Jack Wiring: 50 u" gold plated over 100 u" nickel
- Housing: High impact flame retardant plastic UL 94V-0 rated
- IDC connector suitable for 110 punch down and Krone tool

Specifications are subject to change without prior notice with advancement in technology.