

Preface

Honorable customers,

Thanks for choosing products of this company. OA280, with world cutting edge technologies—fingerprint recognition, computer communication, as well as microelectronics, is considered to be combination of three technologies: electronics, optics and computer communication. It is no doubt that it has become the first choice of standalone time & attendance for enterprises with its strong function and veracity. Please read this user manual carefully to have an initial understanding of functions and basic knowledge of installation, debugging, maintenance, application and management to better use this product.

Utilizing the state-of-the-art biometric tech, this product will bring unprecedented reliability, convenience and benefits to the top management of enterprise in HR.

OA280 Fingerprint T & A Advantages

➤ **Veracity**

Record and reflect staffs' attendance conditions equally, correctly and promptly.

Checking on work attendance by passwords and cards (paper card, magnetic card, IC card, etc); It is hard to avoid buddy-punching and cannot reflect the actual attendance condition. With the help of fingerprint recognition attendance, it is easy to solve all the problems like buddy punching, card loss or stolen and password forgetting. Thus, HR dispute is avoided and the justness of time attendance is materialized.

➤ **Convenience**

It is more convenient to use fingerprint standalone units with no card reader or attendance cards needed, no worrying about cards loss or damage, no need to do system maintenance, and saving time and money.

Only placing enrolled finger on the sensor surface, system will check users automatically and record the correct time and checking status.

➤ **Full Function**

The system can realize different functions such as attendance remark, calculation and report printing. The remark can be made for reasons such as business leave, absence, marriage holiday and etc.; the checking and calculation can be made in accordance with different time periods, departments, individual or combination due to various reasons for absence; the report generation and printing function can be realized perfectly.

➤ **Flexible Shift Maintenance**

The software supports shift on week basis, rotation shifts etc. Various shifts, public holidays, individual leave and overtime are available to meet the complicated needs of every enterprise.

➤ **Standalone**

The machine can work without connecting to PC, convenient in operation and no need to occupy any extra resource.

➤ **Network management**


Many units can be connected through network via TCP/IP for easy management in central software.

Software operation flowchart

(Important chapter please read carefully)

This software includes: System parameter, department management, staffer maintenance, shift management, staffer leave and statistic report etc. Then how to use this system in a right way? It is far from enough to understand only the function of each module but to know the connections between them and the system operation flowchart. Thus, a correct report can be generated.

Software operation flowchart can be described in brief as follows:

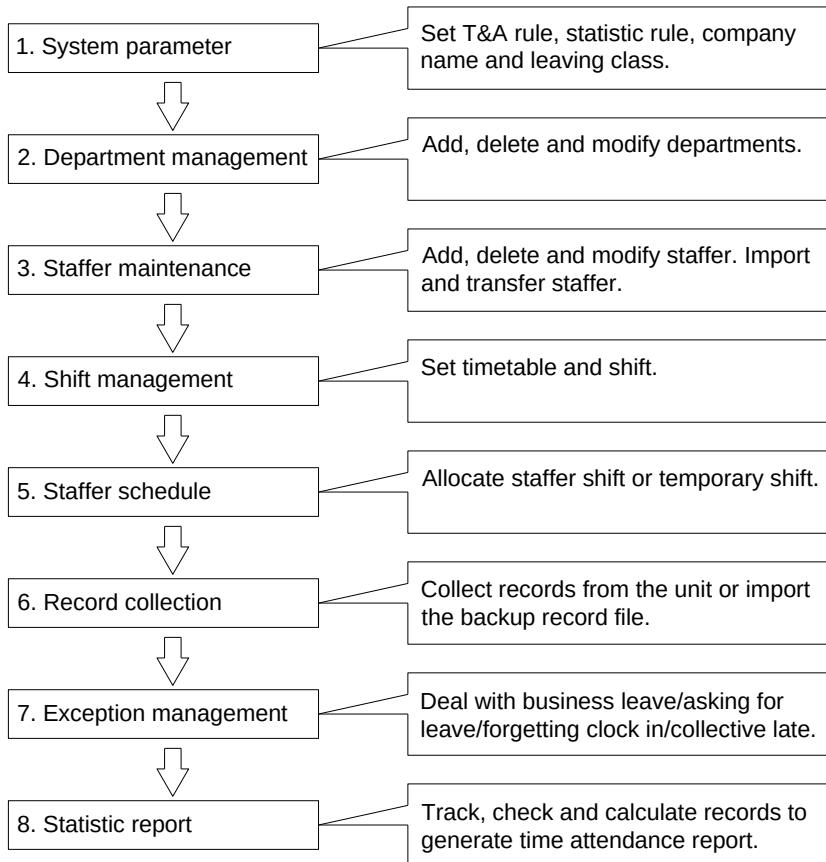

1. When the software is run for the first time, please set parameters including company name, time attendance rule, statistic rule for early, late and overtime etc., leave

class. When the setting is completed, it is usually not needed to be modified unless the management rules of this company changes.

2. Normally there are many departments in one company and all departments need to be entered manually unlike the directly import of staffer. Department setting should be completed before staffer maintenance.

3. When the software is used for the first time, please make a Text file (*.txt) or MS Excel file (*.xls) for company staffer in accordance with certain format. For the format, please refer to **【import staffer list】** so that all staffer can be import to the system at one time. Staffer can be added, deleted, modified and transferred to new department during future use.

4. First add the proper timetable (from on-duty time to off-duty time) according to the company rule and then set shifts.

5. After the shift setting is completed, it will work until shift is allocated to staffer. Each staffer can only have one shift. Please note the starting date of the shift. After the allocation of the shift, the arranged working date and time can be seen clearly for each staffer.

6. Transaction records are stored in the time attendance unit. Please download the records from the unit before report calculation. In addition, staff information and fingerprint templates can be uploaded and downloaded between the unit and the computer. Please refer to “Background management” for detailed information.

7. There is always staff away for business, asking for leave and forgetting clock happening in a company. Once it occurs, please deal with it in time in the software to ensure the correctness of the statistic report.

8. After all the above mentioned operation is done, the calculation of report can be operated. The report can calculate the time attendance status of all staffer or a certain staffer from a certain department in a certain time period.

In **【Attendance Calculating and report】**, first please select the starting and ending date of the staffer, click “Calculate” and the system will calculate automatically and check the validity of the records. (There are some invalid records during the use of the unit. For instance, if one staffer presses the finger twice during a very short time period, one of the records will be regarded as invalid.) If there is any error in the software calculation, admin can also modify manually to ensure the correctness of the result

Please note: From the above flowchart, we can see that if there is an error in

calculation report for one staff, the possible reasons are as follows:

Staffer shift or temporary shift is incorrect.

Exceptions such as staffer away for business/ask for leave/forgetting clock in/out is incorrect.

Checking and calculation of transaction records is incorrect.

Contents

1	Introduction	2
1.1	OA280 Introduction	2
2	Operation guide	5
2.1	Main interface	5
2.2	Enter Password.....	5
2.3	User management	6
2.3.1	Add/Del User	6
2.3.2	Modify the Admin password	12
2.4	System settings.....	14
2.4.1	Modify the date	14
2.4.2	Modify the Time	15
2.4.3	Communication Baud Rate	16
2.4.4	TCP/IP Settings	16
2.4.5	Door Open Delay	17
2.4.6	Sleep time delay	18
2.4.7	Volume.....	18
2.4.8	Set the Device Number.....	19
2.4.9	System Initialization	20
2.5	System Information	21
2.5.1	Registered Fingerprints.....	21
2.5.2	User Amount	22
2.5.3	Time attendance Record.....	22
2.5.4	Available Communication Method.....	23
2.5.5	Firmware Version.....	23
2.6	Records Searching	24
2.6.1	Search the record by the User ID	24
2.6.2	Search all the new records	25
2.7	Time Attendance Identification Method Introduction.....	26
2.7.1	Card FP Password	26
2.7.2	Card & FP	27
2.7.3	Card & Password	28

2.7.4	FP & Password	29
2.7.5	Card & FP & Password	30
3	System Installation	32
3.1	Operation environment	32
3.2	System installation	32
3.3	Uninstall the program	35
4.1	T&A Machine Management	37
4.1.1	Add Unit	38
4.1.2	Modify Unit	38
4.1.3	Delete Unit	39
4.2	Parameter Setting	39
4.2.1	Set Management Password	39
4.2.2	Set Sleep Period	40
4.2.3	Set Volume	40
4.3	T&A Machine Communication Management	41
4.3.1	Synchronize Time	41
4.3.2	Terminal Advanced Parameter	42
4.3.3	Initialize Unit	44
4.3.4	Download Records	45
4.3.5	Backup Staffers	45
4.3.6	Resume Staffers	46
4.4	Record supervision	46
4.4.1	Activate real-time	46
4.4.2	Prohibit real-time	48
4.5	Staffers management	48
4.5.1	Add staffer	49
4.5.2	Modify staffer	58
4.5.3	Delete staffer	58
4.5.4	Transfer department	59
4.5.5	Copy privilege	59
4.5.6	Download FP	61
4.5.7	Upload staffer & FP	62
4.5.8	Delete staffer from unit	63


4.5.9	Check Staff	64
4.6	Record management	65
4.6.1	Search record	65
4.6.2	Export record	66
4.7	Other settings.....	67
4.7.1	Basic parameter setting	67
4.7.2	T&A status setting	68
4.7.3	Timing downloading record	68
4.7.4	Management PW setting.....	69
4.8	Software Interface Setting	72
4.8.1	Interface skin color	72
4.8.2	English/Chinese interface converting.....	72
5	Background management.....	74
5.1	Log in system.....	74
5.2	System settings.....	75
5.2.1	Parameters Settings	75
5.2.2	Administrators.....	77
5.2.3	Administrator's password set	78
5.2.4	Modified record log	79
5.2.5	Managing Log	80
5.2.6	Set Database Link.....	80
5.2.7	Exit System.....	81
5.3	HR management.....	81
5.3.1	Department management	81
5.3.2	Staffer maintenance	82
5.4	Attendance management.....	85
5.4.1	Holidays List	85
5.4.2	Timetable and Shift	86
5.4.3	Staffer Scheduling.....	91
5.4.4	Attendance Records	93
5.4.5	Attendance Calculating and Report	94
5.5	Deal with exceptions	100
5.5.1	Away on Business/ Leave	100

5.5.2	Append Record.....	101
5.5.3	Append Record collectively.....	102
5.5.4	Dealing with collectively late / early	102
5.6	Data maintenance	103
5.6.1	Import Staffer List.....	103
5.6.2	Import Attendance Records	105
5.6.3	Clear Obsolete Data	105
5.6.4	Compress Database	106
5.6.5	Backup Database.....	106
5.6.6	Initialize System	106
5.7	External program management.....	106
5.7.1	External program Management	106
5.7.2	Connect To Time and Attendance Machine.....	107
6	FAQ.....	109
6.1	My fingerprint has been enrolled but often failure in identification.....	109
6.2	T&A system can't be connected with PC.....	109
6.3	No records found though staff have clocked in/out	109
6.4	The user can not identify.....	110
6.5	The staffer can't pass although he has already used the User ID+FP mode	110
6.6	The unit beeps automatically when no one punches in/out.....	110
7	Appendix.....	112
7.1	Communication and Power	112
7.2	Illustration of pressing finger	113

Chapter 1

Introduction

The main theme of this chapter is the feature of this T & A, as well as function introduction.



1 Introduction

1.1 OA280 Introduction

Bio-office series OA280 is the multifunctional standalone T&A and access control system newly launched in 2008. With the use of optical fingerprint sensor and new fingerprint recognition algorithm, OA280 can identify all difficult fingerprints and has solved the long-lasting problem in fingerprint recognition field.

OA280 is a wall mounted fingerprint T&A and access control system with 128*64 blue LCD. This model can be used stand-alone or connected via TCP/IP. OA280 can control door lock for access control. Fingerprint identification provides high security level. The original time attendance records can also be kept in the units.



OA280 Fingerprint T&A Attendance

- World leading brand. Korean industrial design. Blue LCD;
- Optical fingerprint sensor, scratch-proof, unbreakable and durable. Well accept all kinds of fingerprints;
- DSP digital processor from ADI USA, 32 Bits ARM processor from Philips Netherlands, super-duo-core. 2007 version improved core module, more secure and better performance;
- Fingerprint strengthens membrane originally from Taiwan which greatly enhanced the identification of wet or dry fingers, support 360 degrees identification;
- Stand-alone without being connected with computer. Standard fingerprint capacity 5000, standard record capacity 150000;

- Multiple identification method: FP, Card, Card + FP;
- Support staff name display, 5 customizable attendance status, support multimedia voice;
- Standard RS232/485 and TCP/IP communication, Wiegand26 and dry contact output;
- Optional AMJ-601 or AMJ602 access controller for separate type secure access control system;
- Support real-time record download and WEB online tracking function;
- Suitable for all kinds of complicated time attendance management, easy-to-use and user-friendly software;
- Wall mounted, special tamper proof self lock design, combined 2-in-1 function for time attendance and access control;


Chapter 2 **Operation Guide**

This chapter is mainly about appearance illustration and relevant system settings such as how to add and delete users etc.




2 Operation guide


2.1 Main interface

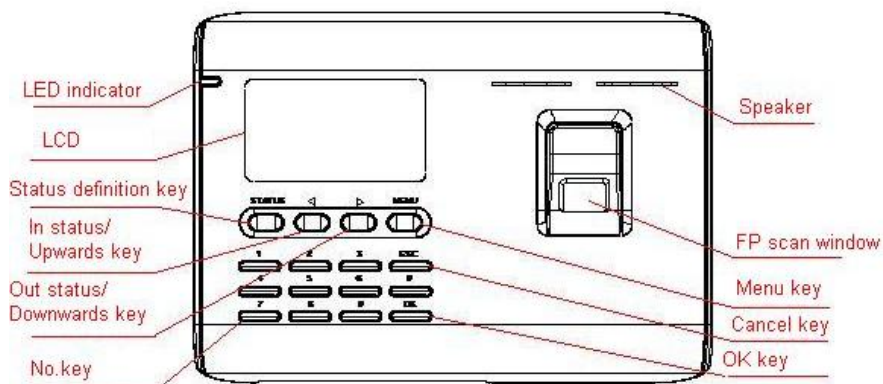

Plug in the power supply. The LCD displays as follows:

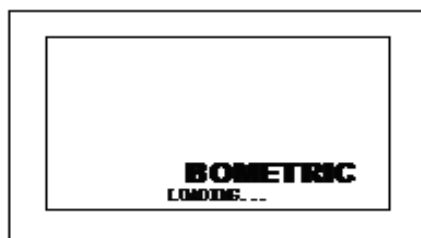


After loading, it displays as follows:

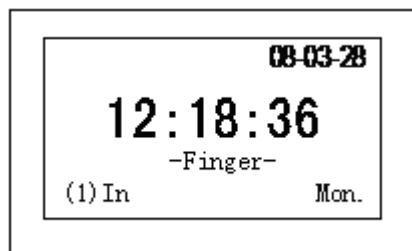


2.2 Enter Password

Press the button **【Menu】**. The LCD display as follows:

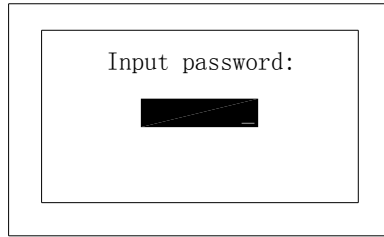


Enter the password (the default password is 8888). Press the button【OK】to confirm.
If you enter a wrong password, the LCD will display as follows:

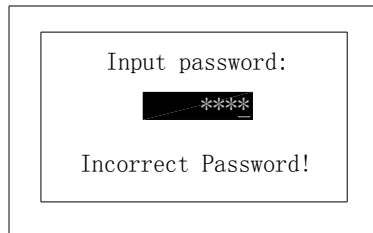

2.3 User management

User management contains the operations such as add, delete and modify the user information and the admin password.

If you enter the right password, you will be able to enter the menu as follows:

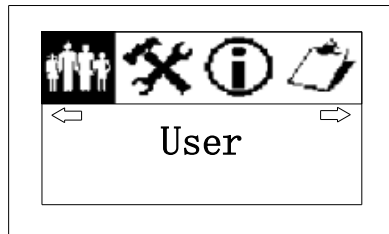

Notice: You can switch the option by pressing the button 【◀】 or 【▶】.

2.3.1 Add/Del User

Press the button 【OK】 to enter the operation interface as follows:

	User
↑	1、Add/Del User
	2、Modify PWD
↓	

Choose the【Add/Del User】and press the button【OK】to enter the operation interface as follows:

No 000001	
↑	ID: 8101
	Name: New User
	FP: 1. ☐
↓	2. ☐

Add new User: Suppose that the ID is 1. Input the ID and press “OK” to confirm. It will automatically turn to the option “FP1”. The LCD will display as follows:

No 000001 (New)	
↑	FP: 1. ☐ ☐
	2. ☐
	Password: -----
↓	Card: -----

Please enroll the fingerprint following the prompt voice.

No 000001 (New)	
↑	FP: 1. ☒ ☐
	2. ☐
	Password: -----
↓	Card: -----

Meanwhile voice will prompt “Press your finger again”. Please press your finger on sensor again. After identification successful, LED indicator will flash with green light and voice prompt “Registration successful”.

No 000001		(New)
↑	FP: 1. ☒ ☐	☐
	2. ☐	
	Password: -----	
↓	Card: -----	

Press the button **【▶】** to choose the “FP2” option. Please enroll the fingerprint following the prompt voice.

No 000001		(New)
↑	2. ☒ ☐	☐
	Password: -----	
	Card: -----	
↓	T&A Opt: -1-	

Press the button **【▶】** to choose the “Password” option as follows:

No 000001		(New)
↑	Password:	
	Card: -----	
	T&A Opt: -1-	
↓	DoorOpen: Y	

Input the password (the maximum password is 99999999) and press the button **【OK】** to confirm. The “Password” option will display as follows:

No	000001	(New)
↑	Password:	*****
	Card:	-----
	T&A Opt:	-1-
↓	DoorOpen:	Y

Press the button **【▶】** to choose the option “Card” to add the card number as follows:

No	000001	(New)
↑	Card:	-----
	T&A Opt:	-1-
	DoorOpen:	Y
↓		

Swipe the card and the LCD will display as follows:

No	000001	(新)
↑	Card:	13839320
	T&A Opt:	-1-
	DoorOpen:	Y
↓		

Press the button **【▶】** to choose the “T&A Opt.”, option as follows:

No	000001	(New)
↑	T&A Opt:	-1-
	DoorOpen:	Y
↓	Save	

Press the button **【MENU】** to enter the time attendance identification method setting interface as follows:

1. Card FP PassWord
2. Card & FP
3. Card & PassWord
4. FP & PassWord
5. Card & FP & PassWord

Press the button **【◀】** or **【▶】** to set the identification method .And please press the button **【ok】** to confirm after setting.

There are 5 identification methods:

- 1、Card | FP | Password: Card only, fingerprint only or password only
- 2、Card & FP: Card and fingerprint
- 3、Card & Password: Card and password
- 4 、FP & Password: Fingerprint and password
- 5、Card & FP & Password: Card, fingerprint and the password.

Press the button **【▶】** to choose the “Door Open” option. The default is door open enable. The inter face is as follows:

No 000001	(New)
↑ DoorOpen:	Y
Save	
↓	

You can press the button **【MENU】** to disable or enable the “Door open”.

No 000001	(New)
↑ DoorOpen:	N
Save	
↓	

There are two states:

Y: Allow to open the door

N: Prohibit opening the door

Press the button **【▶】** to choose the “Save” Option. The LCD displays as follows:

The LCD screen displays a menu with the text "No 000001 (New)" at the top. Below this, there is a "Save" button highlighted with a black background. To the left of the button are up and down arrow icons, indicating navigation options.

Press the button **【OK】** to save .The LCD will display as follows:

The LCD screen displays the same menu as before, but now the "Save" button is highlighted. Below the button, the word "Success" is displayed, indicating that the save operation was completed.

Notice: If you want to escape the menu, you can press the button **【Esc】** to switch to the “save” interface. And then press the button **【Esc】** again to escape the menu.

Delete User: For example, we want to delete the user 8101. Enter the **【Add/Del User】** interface. Enter the User ID. Press the button **【OK】** to confirm. Press the button **【▶】** or **【◀】** to choose the Opting “Del”. Press the button **【OK】** . The LCD displays as follows:

The LCD screen displays a menu with the text "No 000001 (Old)" at the top. Below this, there are two buttons: "Save" and "Del". The "Del" button is highlighted with a black background. To the left of the buttons are up and down arrow icons, indicating navigation options.

Press the button **【1】** to confirm .Press the button **【2】** to cancel.

Edit User: Enter the **【Add/Del User】** interface. Enter the User ID. Press the button **【OK】**

to confirm. The LCD displays as follows:

No 000001 (Old)	
↑ ID:	000008101
Name:	New User
FP:	1. ☒
	2. ☒
↓	

Modify the parameters according to the real requirement.

Notice: If the user information is uploaded from the background software, it will display the user's Name instead of the "New user" as follows:


No 000001 (Old)	
↑ ID:	000008101
Name:	Emmily
FP:	1. ☒
	2. ☒
↓	

2.3.2 Modify the Admin password

Enter the **【User】** interface. Choose the **【Modify PWD】** option.


	User
↑	2. Modify PWD
↓	

Press the button **【OK】** . The LCD displays as follows:

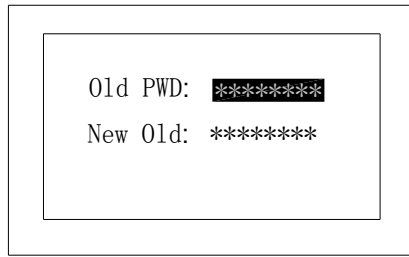


Old PWD: *****
New Old: *****

Enter the old password firstly.

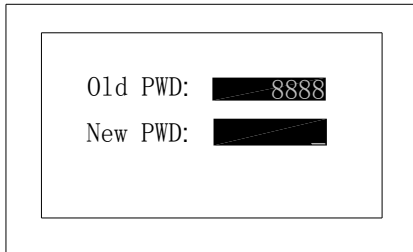


Old PWD: 8888
New PWD:

Enter the new password secondly. Press the button **【OK】** .The LCD displays as follows:

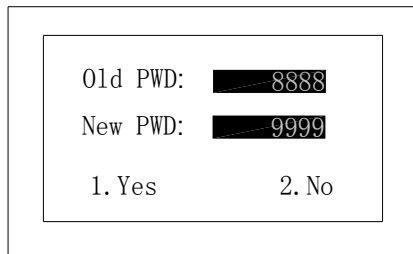

Old PWD: 8888
New PWD: 9999
1. Yes 2. No

Press the button **【1】** to confirm the modification. The LCD displays as follows:

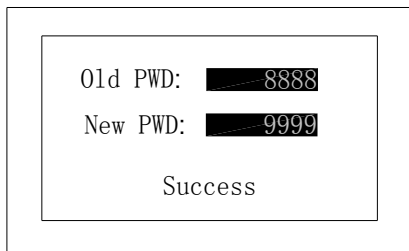


Old PWD: 8888
New PWD: 9999
Success


Press the button **【2】** to cancel.

Press the button **【ESC】** if you want to escape.

If you enter an incorrect password, it will prompt that it is an invalid password as follows:

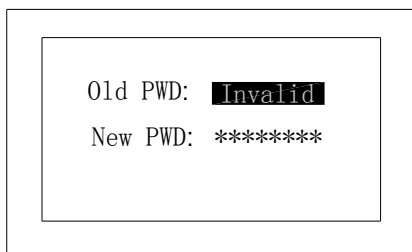


After displaying the “Invalid” two seconds, it will let you try again.

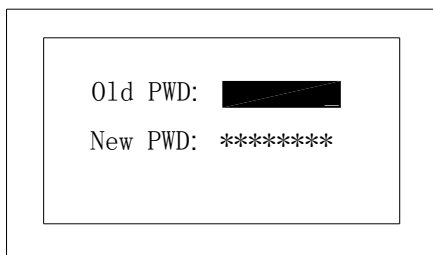

2.4 System settings

Choose **【System】** option as follows:

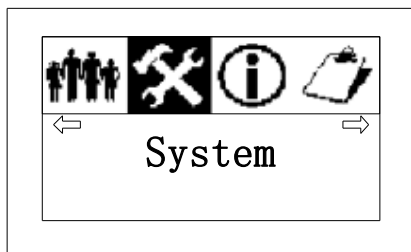


Press the button **【OK】** to enter the “System” interface.


Notice: You switch the menu by pressing the button **【▶】** or **【◀】**

2.4.1 Modify the date

Choose the option **【Date】** .The LCD displays as follows:

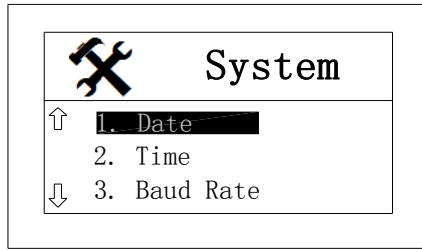

Press the button **【OK】** to enter the Date modification interface as follows:

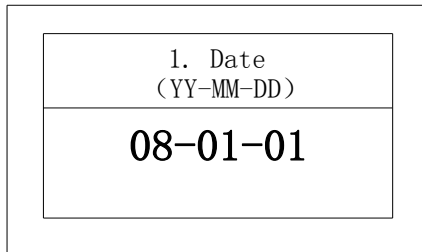


Enter the date. Press the button **【OK】** to confirm. It will display modification successes as follows:




2.4.2 Modify the Time

Choose the option **【Time】**. The LCD displays as follows:

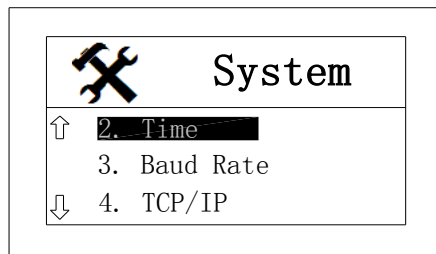


Press the button **【OK】** . The LCD displays as follows:

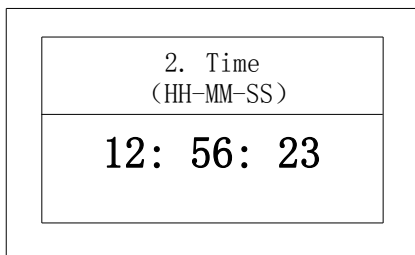


Set the time. Press the button **【OK】** to confirm.

2.4.3 Communication Baud Rate

Choose the option **【Baud Rate】** .The LCD displays as follows:

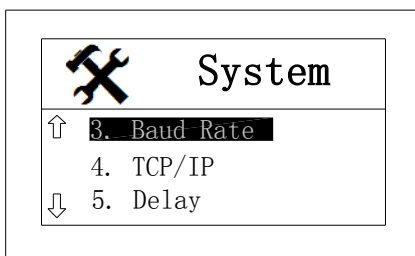


Press the button **【OK】** .The LCD displays as follows:

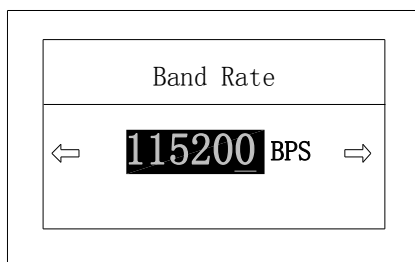


You switch the menu by pressing the button **【▶】** or **【◀】** . Press the button **【OK】** to confirm.

2.4.4 TCP/IP Settings

Choose the option **【TCP/IP】** .

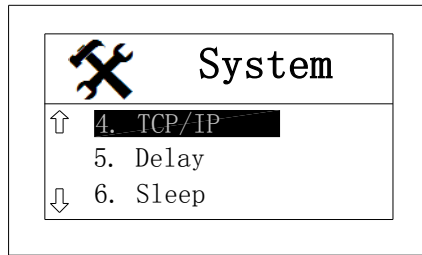

Press the button **【OK】** . The LCD displays as follows:

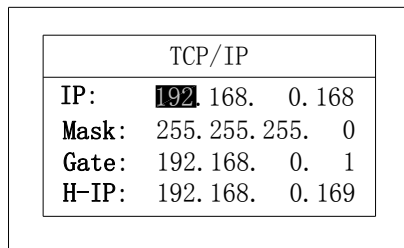

Set the IP settings. Press the button **【OK】** to confirm.

Remark:

IP: The default IP address is 192.168.0.168


Mask: The default value is 255.255.255.0

Gate: The default gateway is 192.168.0.1


H-IP: It is the computer's IP address. The computer is the one that installs the oa280's background software. Its default value is 192.168.0.169.

2.4.5 Door Open Delay

Choose the option **【Delay】**

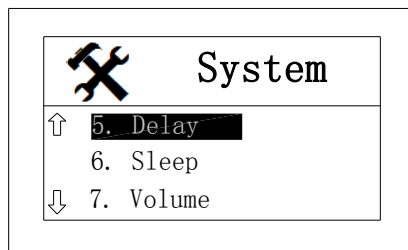

Press the button **【OK】** . The LCD displays as follows:

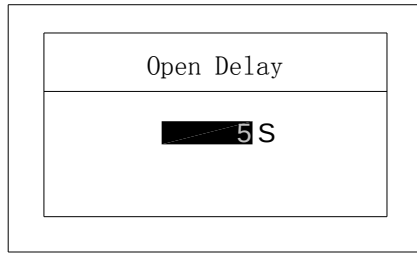


Notice: The maximum delay is 60s. And the default value is 5s.


Enter the delay. Press the button **【OK】** to confirm.

2.4.6 Sleep time delay

Choose the option **【Sleep】** :

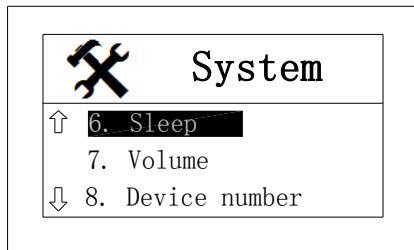

Press the button **【OK】** . The LCD displays as follows:

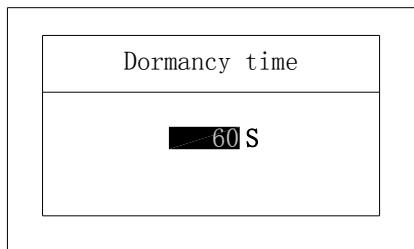


Notice: the maximum sleep time delay is 57600s.The default value is 60s.When it is set as 0s, the OA280 does not sleep.


Set the delay. Press the button **【OK】** to confirm.

2.4.7 Volume

Choose the option **【Volume】** :

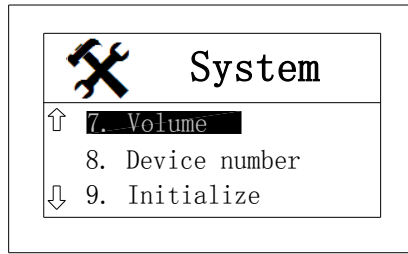


Press the button **【OK】** . The LCD displays as follows:

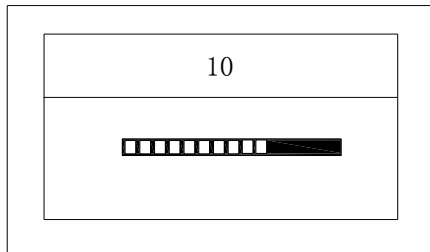


Press the button **【▶】** and **【◀】** to adjust the volume. Press the button **【OK】** to confirm.

2.4.8 Set the Device Number

Choose the option **【Device number】** :

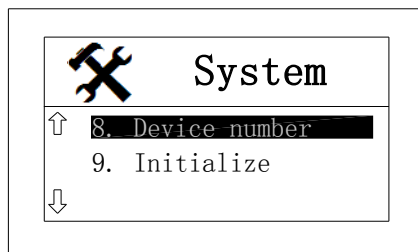

Press the button **【OK】** . The LCD displays as follows:

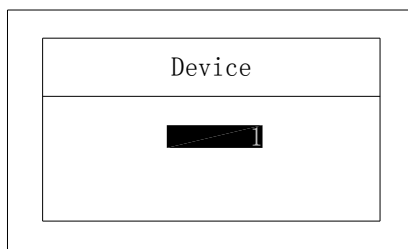


Notice: The range of the device number is 1—65534


Enter the device number. Press the button **【OK】** to confirm.

2.4.9 System Initialization


Choose the option **【Initialize】** :

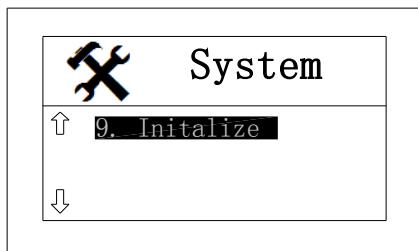


Press the button **【OK】** . The LCD displays as follows:

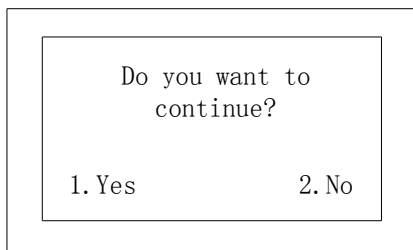

Press the button **【1】** to initialize the unit. The LCD displays as follows:

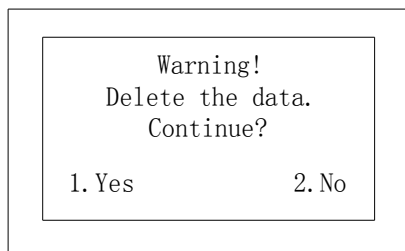

Press the button **【1】** to confirm. The LCD displays as follows:

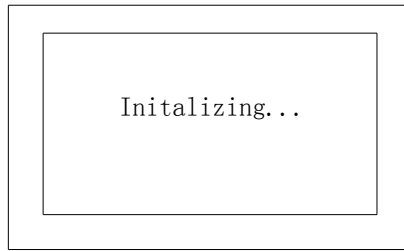


The unit will restart automatically after initialization.

Press the button **【2】** to cancel.

Notice: We suggest you to backup all the data before initializing the unit.

2.5 System Information


Choose the option **【System Info】** :

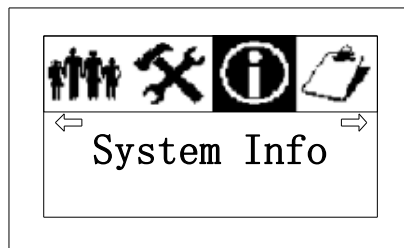


Press the button **【OK】** to enter the submenu.

2.5.1 Registered Fingerprints

Choose the option **【FP Reg.】**

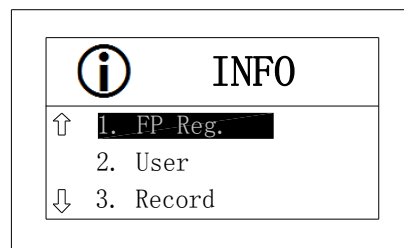


Press the button **【OK】** to check the details as follows:

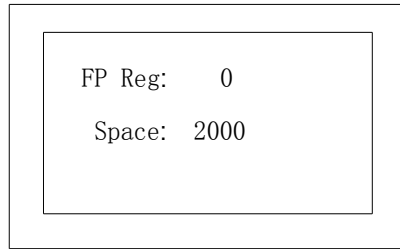


Press the button **【OK】** or **【Esc】** to go back to the upper menu

2.5.2 User Amount

Choose the option **【User】** :

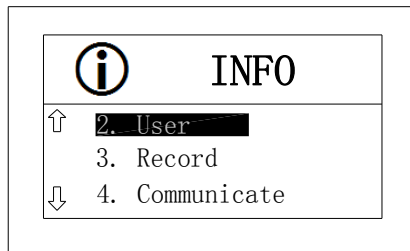


Press the button **【OK】** . The LCD displays as follows:

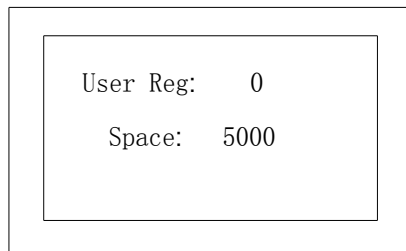


2.5.3 Time attendance Record

Choose the option **【Record】** :

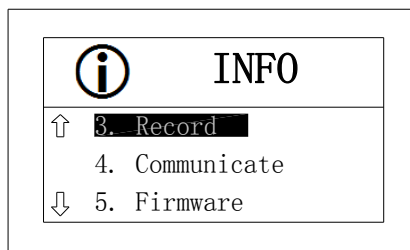


Press the button **【OK】** . The LCD displays as follows:

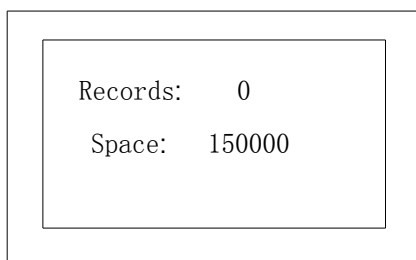


2.5.4 Available Communication Method

Choose the option **【Communicate】** :

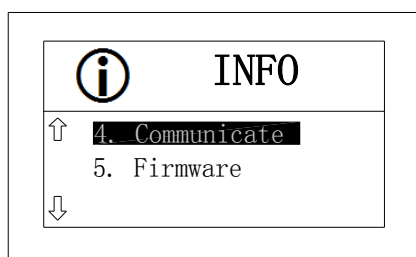


Press the button **【OK】** . The LCD displays as follows:

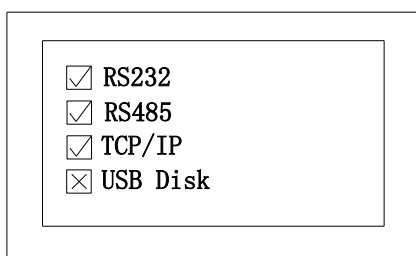


2.5.5 Firmware Version

Choose the option **【Firmware】** :

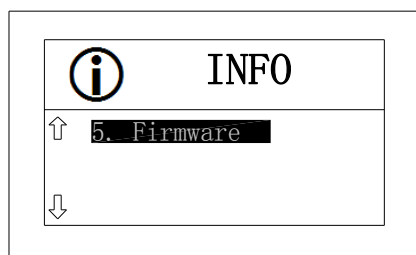


Press the button **【OK】** . The LCD displays as follows

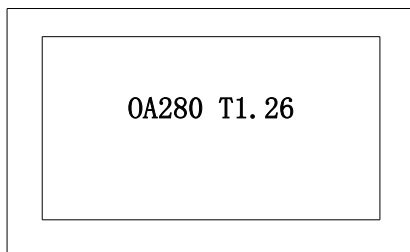

2.6 Records Searching


Choose the option **【Record】** :

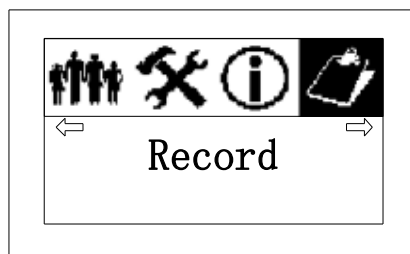


Click the button **【OK】** to enter the submenu.

2.6.1 Search the record by the User ID

Choose the option **【Search by user】** :

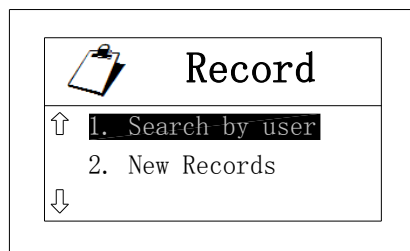

Press the button **【OK】** .The LCD displays as follows:

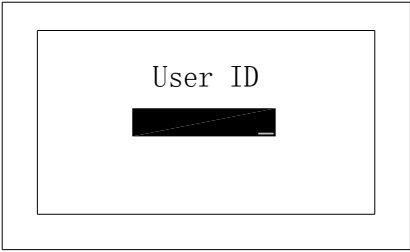


Enter the User ID. Press the button **【OK】** to confirm. The LCD displays as follows:

(Old)	⇒	(New)
000000001	28/03	08:58
000000001	28/03	18:05
000000001	29/03	09:01
000000001	29/03	17:59

Notice: You can browse the records by pressing the button **【▶】** or **【◀】**.

2.6.2 Search all the new records

Choose the option **【New Records】** :

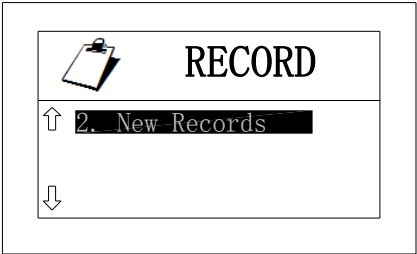

Press the button **【OK】** . The LCD displays as follows:



And then the LCD displays the new records interface as follows:

⇐000001	000006⇒
000000001	01/01 08:58
000000003	01/01 08:57
000000011	01/01 08:58
000000022	01/01 08:59
000000035	01/01 08:59
000000046	01/01 08:59

It displays 6 records in one page. You can press the button【▶】or 【◀】 to let it page up or page down.

Notice: You can press the button 【Esc】 or 【OK】 if you want to escape the records interface...

2.7 Time Attendance Identification Method Introduction

There are several identification methods. So please use the right identification method when you clock in.

2.7.1 Card | FP | Password


Card only: Just punch the card on the card punching area.

Fingerprint only: Press the fingerprint on the optical sensor reader.


User ID + Password: Enter the User ID firstly.

User ID:	8101
Password:	*****


Press the button 【OK】secondly. And then enter the password. The LCD displays as follows:

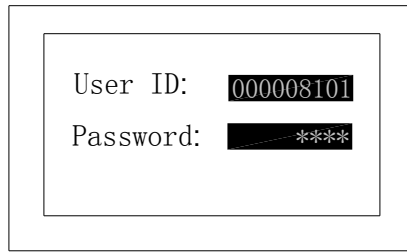

Press the button **【OK】** to confirm. If identify successfully, the LCD displays as follows:

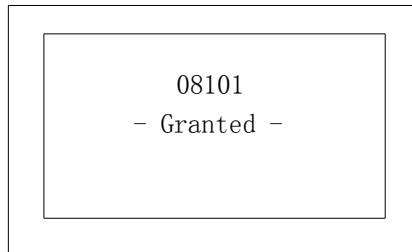

If you input a wrong password, it displays as follows:

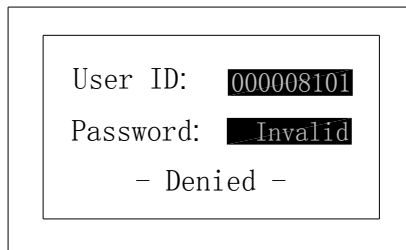

Please try to input the correct password.

2.7.2 Card & FP

Press the fingerprint on the optical sensor firstly and swipe card secondly. Or swipe the card firstly and press the fingerprint on the optical sensor secondly.

If you press the fingerprint on the optical sensor firstly, the LCD displays as follows:

Fingerprint: ☒
➡ Swipe card: ☐

Swipe your cards. If it is success, the LCD displays as follows:

08101
- Granted -

If it is failed, the LCD displays as follows:

FingerPrint: ☒
➡ Swipe card: ☒


You can try to swipe the correct card again.

Notice: If you swipe the card firstly, the LCD displays as follows:

Swipe card: ☒
➡ Fingerprint: ☐


2.7.3 Card & Password

Swipe the card firstly and enter the password secondly. The LCD displays as follows:

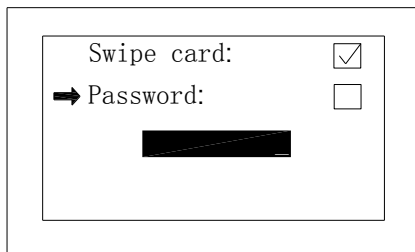

The LCD display shows a menu with two options. The first option is "Swipe card:" followed by a checked checkbox. The second option is "Password:" followed by an unchecked checkbox and a blacked-out input field.

Enter the user's password. The LCD displays as follows:

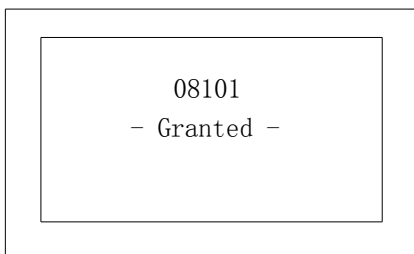

The LCD display shows the number "08101" and the text "- Granted -" below it.


2.7.4 FP & Password

Press the fingerprint on the optical sensor reader firstly. The LCD displays as follows:




The LCD display shows a menu with two options. The first option is "Fingerprint:" followed by a checked checkbox. The second option is "Password:" followed by an unchecked checkbox and a blacked-out input field.

Enter the user's password. The LCD displays as follows:

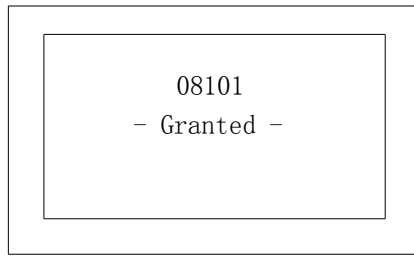


2.7.5 Card & FP & Password


If you swipe the card firstly, the LCD displays as follows:

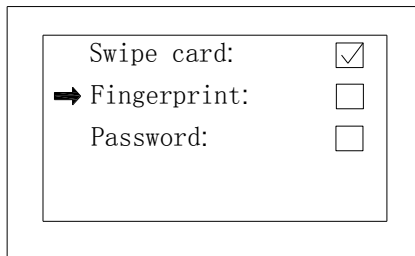

Press the fingerprint on the optical sensor reader, the LCD displays as follows:

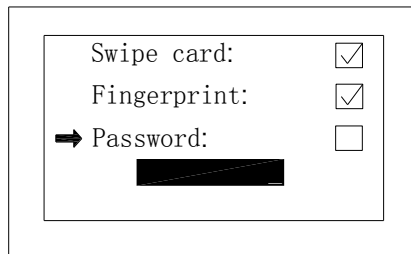

Enter the passwords finally.

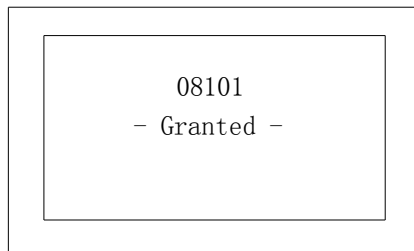

Notice: You can also press the fingerprint firstly and swipe the card secondly.

Chapter 3

System Installation

This chapter mainly discusses the installation and un-installation of T&A software as well as the hardware and operation system requirement.



3 System Installation

First we should install background management software on the computer. Please refer to the following steps:

3.1 Operation environment

Hardware requirement:

Pentium II266 and above; Pentium III500 and above is recommended

128 Memory and above; Minimum 100M hardware space

COM (USB Port)

CD-ROM (CD-ROM needed in installation)

VGA support 800*600 resolution and above

Operation system:

Microsoft Windows 2000(recommended)


Microsoft Windows XP

3.2 System installation


Please insert T&A disc into CD-ROM and the disc will automatically run the installation program. If not, please run setup.exe in the root directory of the disc. The following window will pop up:




Select the proper language version in the above picture, click “Chinese (Simplified),” “English” or “Chinese (Traditional)” to enter the appropriate installation program and the following window will pop-up. (Here, we use English for example.)

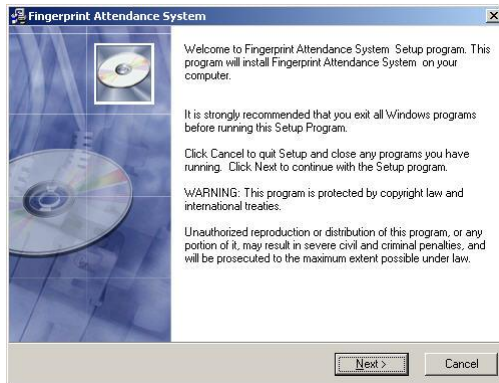


Click “Next” to continue installation (see the picture below :)

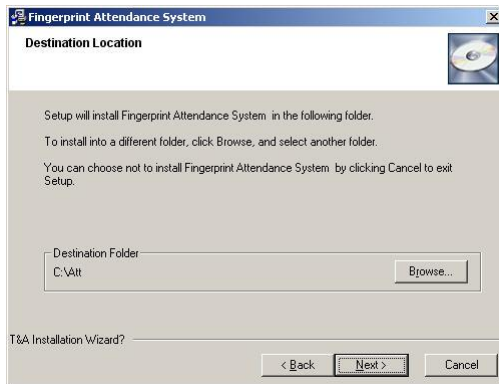


Select the target directory to install the program and the default is “C:\Att”. Click “Next” to continue installation (see the picture below :)

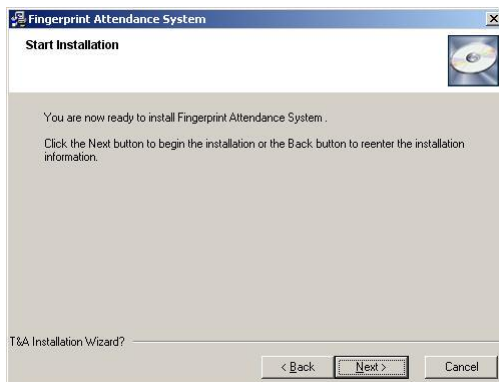


Click “Back” and installation will return to the previous screen and re-select target directory; Click “Next” and the installation will start as the following picture shows:

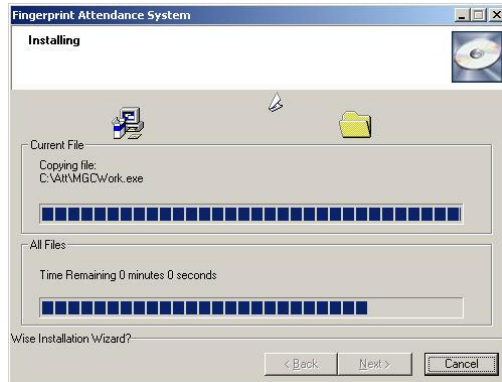

The installation will be done after seconds (see the picture below :)

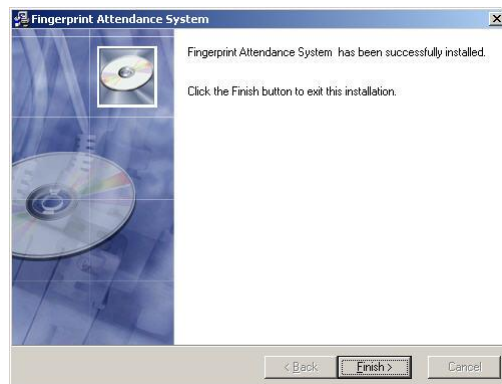

Click “Finish” to close the installation program and an icon  will be added to the desktop. Double click it and the T&A management system will be started. In addition, “Time and Attendance System” has been added to “All Programs”. Please see the picture below:

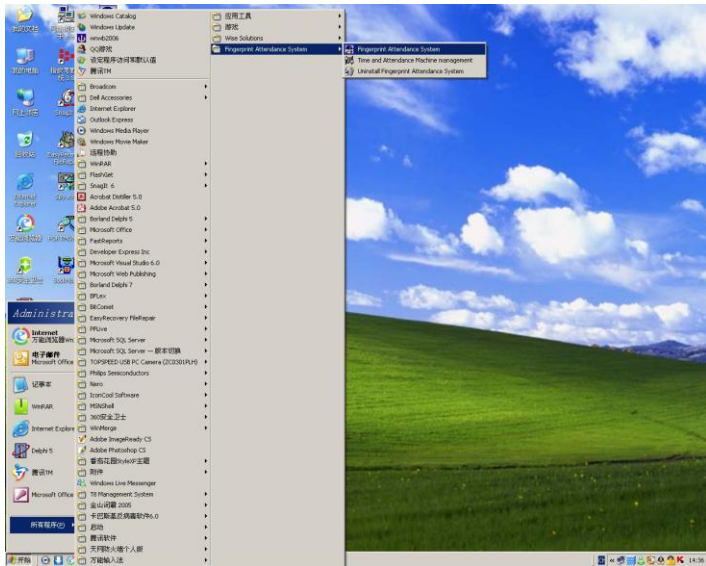

The shortcut of “Time and Attendance System” is included in “All Programs”

3.3 Uninstall the program

Click “Uninstall Time and Attendance System” in the above picture, click “Next” and the program will be uninstalled automatically.

Please note: All the files and data will be deleted after uninstalling the program so please make sure before operation.

Chapter 4


Communication

The chapter is mainly about how to add, delete and set communication between PC and terminal.




4 Communication

Click **【External】** on the management menu and choose **【Connect To Time and Attendance Machine】**. If the Time attendance management software's login password is empty, the following window will pop up:

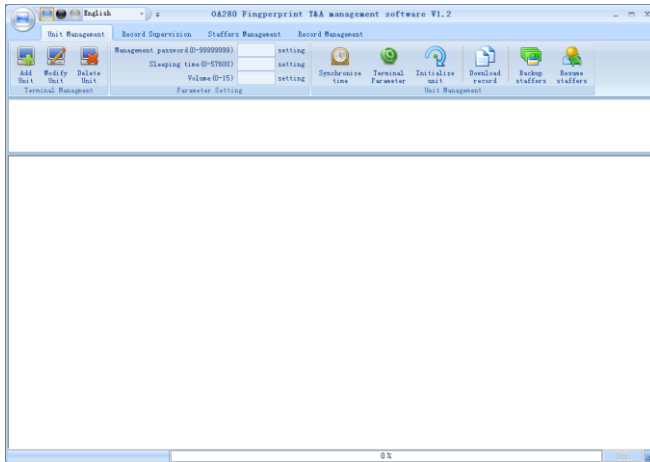

If the time attendance software's login password is not empty, you should enter the password firstly.



Enter the password and click the button **【OK】** to login.

If you enter the wrong password 3 times, the software will automatically close.

When you enter a wrong password, a message box pops up as follows:



Click the button **【OK】**. And then try to enter the correct password.


4.1 T&A Machine Management

We can: Add Unit, Delete Unit, modify Unit; modify its parameter settings;

synchronize time, terminal parameter, initialize unit, download record, backup staffers, resume staffers and so on.

4.1.1 Add Unit

Click the button **【Add Unit】** . Following windows pops up:

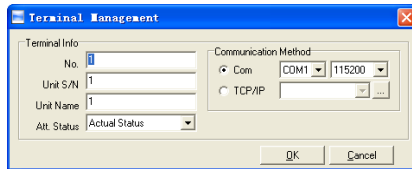A dialog box titled "Terminal Management" with a blue title bar and a close button. It contains two main sections: "Terminal Info" and "Communication Method". The "Terminal Info" section has four input fields: "No." with the value "1", "Unit S/N" with the value "1", "Unit Name" with the value "1", and "Att. Status" with a dropdown menu showing "Actual Status". The "Communication Method" section has two radio buttons: "Com" (selected) and "TCP/IP". The "Com" section has two dropdown menus: "COM1" and "115200". The "TCP/IP" section has a text input field. At the bottom right are "OK" and "Cancel" buttons.

Remark:

No.: This number can be set as you like.

Unit S/N: Serial number is used to identify every time attendance terminal (this number is on back label as “Serial No”);


Unit Name: You can set it as you like.

Att. Status: There are three options: Actual Status, on duty and off duty. When we set it as “Actual Status” the attendance records’ status in the software are as same they are in the device (OA280). If you set it as “ON Duty”, all the records’ status which is from this OA280 will be “On duty”.

Com: The default is Com1 and the 115200bps.


TCP/IP: Click the button **【...】** to refresh the option list; you will see all the OA280’s IP which is in the Network.

Click the button **【OK】** to save the information. It displays as follows:

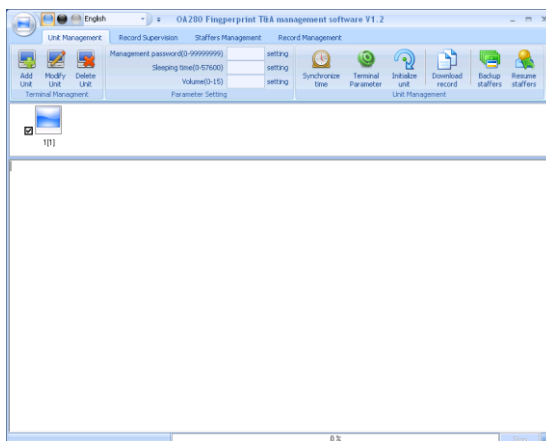


4.1.2 Modify Unit

Choose the terminal and then click **【Modify Unit】**; the following window will pop up:

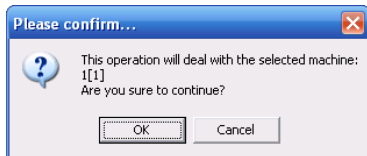

Modify the information and then click the button **【OK】** to save the modification. Click the button **【Cancel】** to cancel the modification.


If the “No” is already exist in the software, following message box pops up:

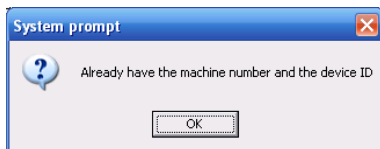

Click the button **【OK】** to set the Unit information again.

4.1.3 Delete Unit

Choose the T&A unit and then click the button **【Delete Unit】**. Following message box pops up:

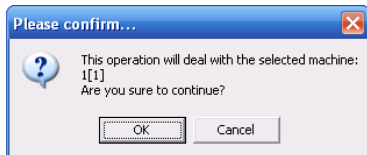


Click the button **【OK】** to delete or click the button **【Cancel】** to cancel.

4.2 Parameter Setting

Choose the T&A unit firstly. And then we modify its parameter settings.


4.2.1 Set Management Password

Enter one password in the input box. The management password can be 0-99999999. Click the button **【setting】**. Following message box pops up:

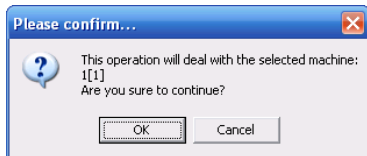

Click the button **【OK】** to confirm or click the button **【Cancel】** to cancel.

Some operation information displays in the main interface as follows:

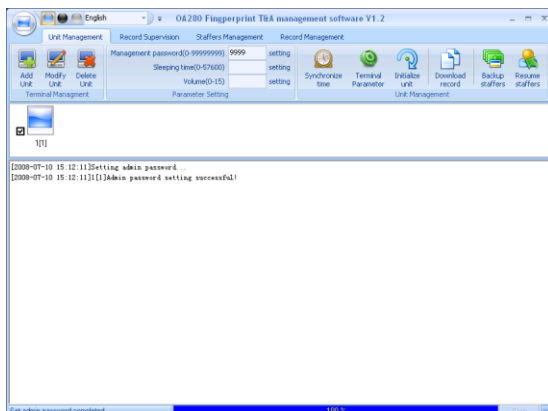


Notice: We use this management password to enter the device menu. You can't use this password to enter the software.

4.2.2 Set Sleep Period


Enter the time period in the sleeping time input box. The time period can be 0-57600. If you set the sleep period as 0, the unit will never sleep.

Click the button **【OK】**. One message box pops up as follows:

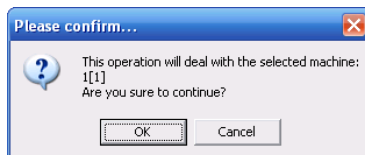

Click the button **【OK】** to confirm or click the button **【Cancel】** to cancel.


Some operation information displays in the main interface as follows:

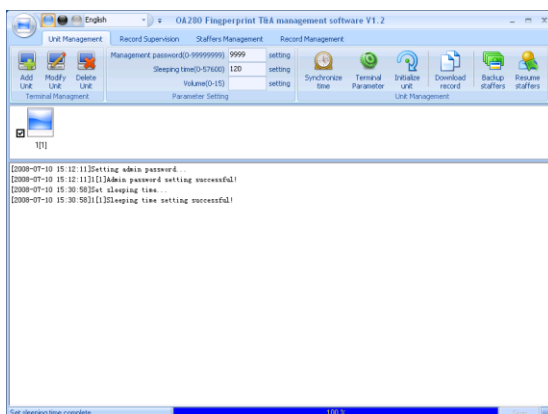

4.2.3 Set Volume


Enter the volume level in the volume input box. The volume lever is 0-15. If it is set as 0, there is no voice.

Click the button **【setting】** . One message box pops up as follows:

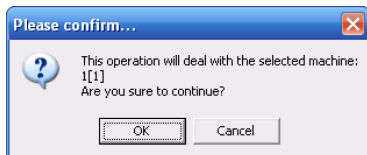

Click the button **【OK】** to confirm or click the button **【Cancel】** to cancel.

Some operation information displays in the main interface as follows:

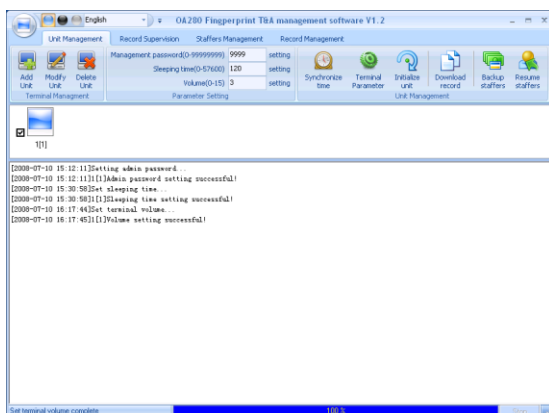


4.3 T&A Machine Communication Management

It contains synchronize time, terminal parameter, initialize unit, download record, backup staffers, resume staffers and so on.


4.3.1 Synchronize Time

Synchronize the OA280's time with the computer time. Click the button **【Synchronize time】** . Following message box pops up:

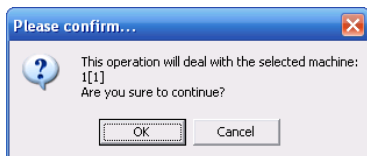

Click the button **【OK】** to confirm or click the button **【Cancel】** to cancel.

Some operation information displays in the main interface as follows:

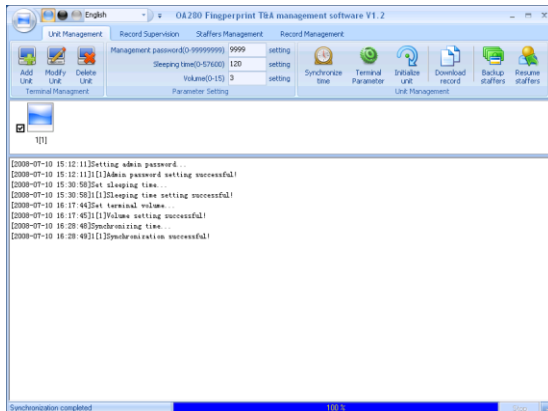

4.3.2 Terminal Advanced Parameter

Click the button **【Terminal Parameter】**. The **【Terminal Advanced Parameter】** interface pops up:

Fingerprint Verification Precision: There are 5 levels. The default value is 3.

Record Alarm Threshold Values: If the rest memory space for the record is less than the threshold value, the OA280 will alarm.

Time period between repeated Checking: The maximum value is 254s. And the default value is 30s.

Date format: There are three kinds date format: yy-mm-dd, mm/dd/yy, and dd/mm/yy.

Select Key tone: Buzzer or Speaker. The default is buzzer.

Menu Operation Privilege: No Restriction, forbid entering management, forbid modifying staffer information

Attendance Operation Privilege: No Restriction, Forbid verification.

Relay Open Door: The relay generate the dry connect signal (COM, NC and NO). It allows the relay to open the door as default.

Wiegand Open Door: It allows the Wiegand signal to open the door as default.

Wiegand Mode: Standard Wiegand and encrypted Wiegand. It is set as standard Wiegand as default.

Standard Wiegand Mode: Wiegand26 and Wiegand34. It is set as wiegand26 as default.

Lock Relay Time: The door open delay. The maximum is 60s. And the default value is 3s.

Click the button **【Display default setting】** to see the OA280's default settings as follows003A

Fingerprint Verification Precision(1-5)	3
Record Alarm Threshold Values(0-65534)	10000
Time Period Between Repeated Checking(0-254)	30
Date Format	yy-mm-dd
Select Key Tone	Buzzer
Menu Operation Privilege	No Restriction
Attendance Operation Privilege	No Restriction
Access Control	
Relay Open Door	Allow
Wiegand Open Door	Allow
Wiegand Mode	Standard wiegand
Standard Wiegand Mode	wiegand26
Lock Relay Time(1-60 Sec):	3
Att. status auto update	
Att. status1	Update time1 0:00:00
Att. status2	Update time2 0:00:00
Att. status3	Update time3 0:00:00
Att. status4	Update time4 0:00:00
Att. status5	Update time5 0:00:00
Att. status6	Update time6 0:00:00
Att. status7	Update time7 0:00:00
Att. status8	Update time8 0:00:00

Click the button **【OK】** to save the settings. Following message box pops up:


Please confirm...

?

This operation will deal with the selected machine:
1[1]
Are you sure to continue?

OK Cancel


Click the button **【OK】** to confirm or click the button **【Cancel】** to cancel.
Some operation information displays in the main interface as follows:

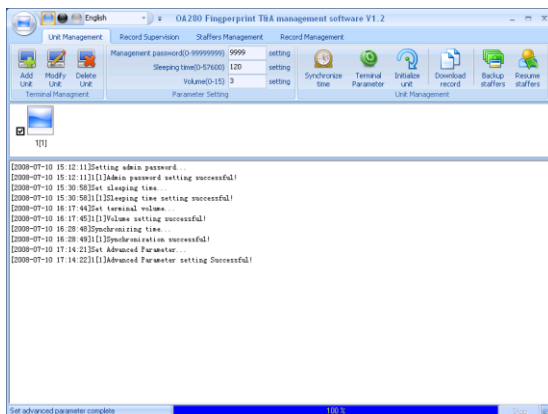


4.3.3 Initialize Unit

The machine system will resume to factory settings. All data will be cleaned up.
Attention should be taken for this operation!

Click the button **【Initialize Unit】**. Following message box pops up:

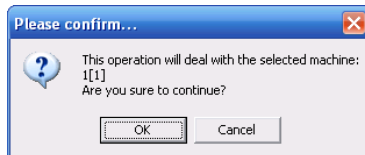

Click the button **【OK】** to confirm or click the button **【Cancel】** to cancel.
Some operation information displays in the main interface as follows:

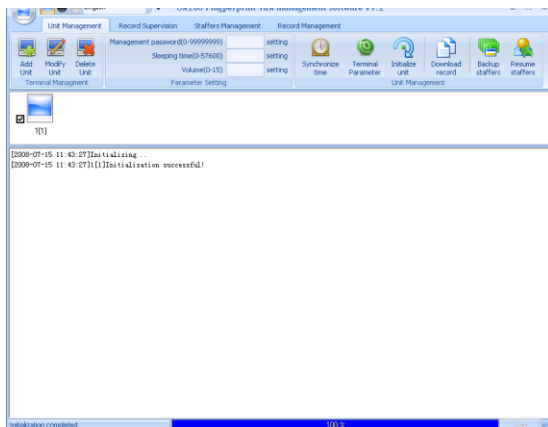


The OA280 takes about 20s to initialize the system. And it restarts after initialization.

4.3.4 Download Records


Download the records from the OA280 to the computer.

Click the button **【Download records】** . Following message box pops up:

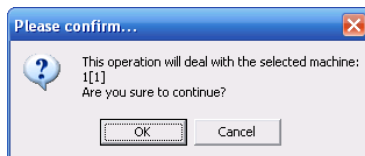

Click the button **【OK】** to confirm or click the button **【Cancel】** to cancel.


Some operation information displays in the main interface as follows:

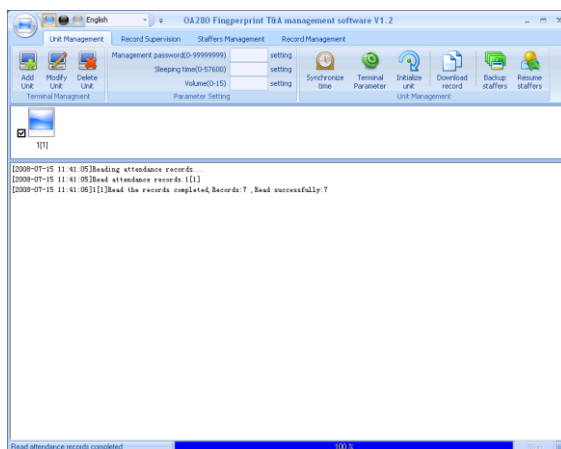

4.3.5 Backup Staffers


Download the staffer information and staffers' fingerprint templates from the OA280 to the computer. You can edit the staffer information in the database Att2003.mdb. The user information is saved in the table "User Info" of the database. And the fingerprint templates information is saved in the folder "Template "in the installation directory.

Click the button **【Backup Staffer】** . Following message box pops up:

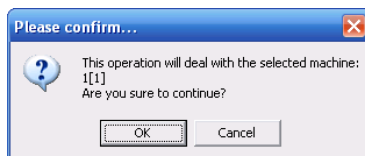

Click the button **【OK】** to confirm or click the button **【Cancel】** to cancel.


Some operation information displays in the main interface as follows:

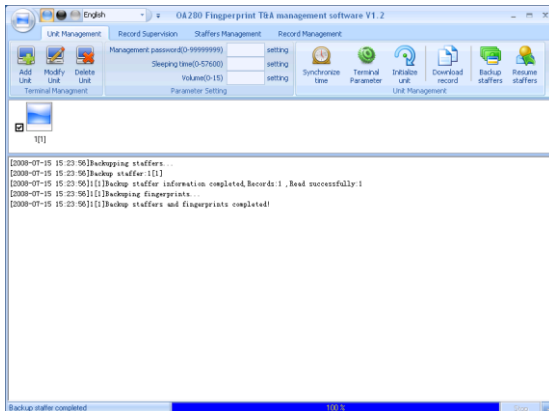

4.3.6 Resume Staffers


Upload the staffer information and staffer's templates from the computer to the OA280.

Click the button **【Resume staffers】**. Following message box pops up:

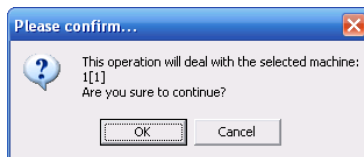

Click the button **【OK】** to confirm or click the button **【Cancel】** to cancel.

Some operation information displays as follows:

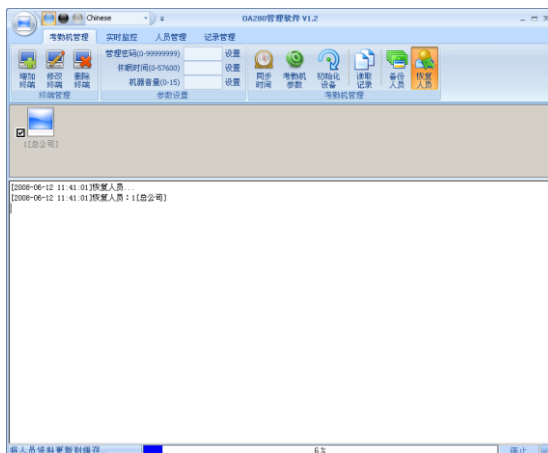


4.4 Record supervision


4.4.1 Activate real-time

Real time function enable track the attendance records in unit at any time.


Choose terminals need to be set monitor. Click **【Activate real time】** button, status menu will show 'Activate real time monitor....', after completed, it will show 'Activate real time monitor function completed'. Progress bar will finish at 100%.The start time of real-time monitor records information will be shown as the pc's current time. The interface is as following,

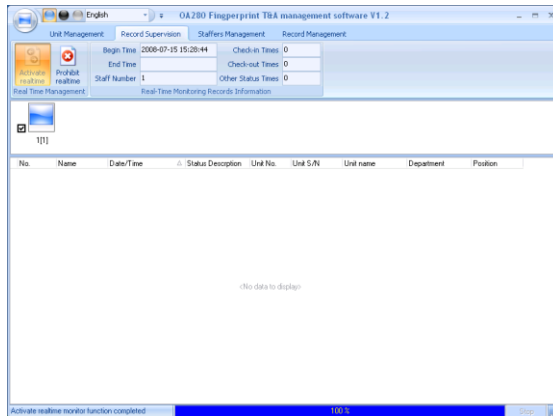

After activating real time monitor, when a user makes attendance record on unit, the record will appear directly in the list of the window below. Meanwhile, real-time monitor records information will show the user number who does attendance records.

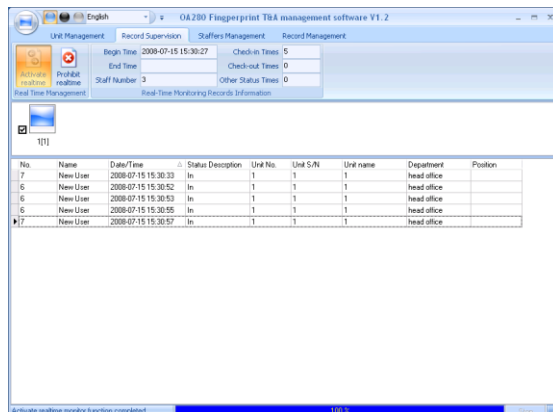


During real-time monitor process, when each staff passes attendance, there will pop-up the staff info at the right-down corner likes following shows,



4.4.2 Prohibit real-time

Click **【Prohibit real-time】** button, status menu will prompt 'Prohibit real-time monitor...' After completed, it will show 'Prohibit real-time monitor completed'. Progress bar will finish at 100%. The start time of real-time monitor records information will be shown as the pc's current time. The interface is as following,

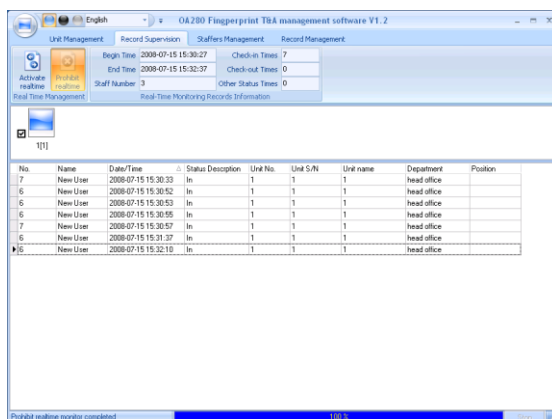


After real-time monitor prohibited, real-time monitoring records info will still exist. If reactivate real-time function, the info will be totally cleared, but the attendance records in the list will not be cleared.

4.5 Staffers management

Staffer's management mainly includes these functions: staffer management in database of local PC、staffer communication management between PC and unit、staffer info tracking.

Staffer management interface is as following,

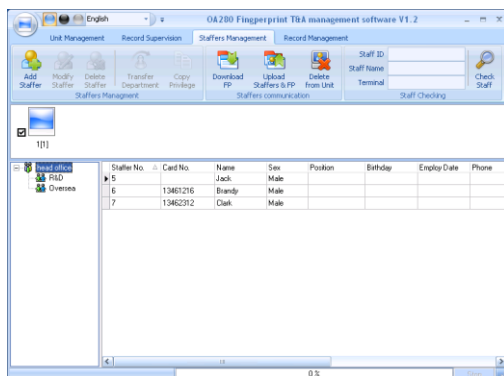


4.5.1 Add staffer

Click **【Add staffer】** button, open **【Add/modify staffer info 】** window which includes 3 pages info: Basic info、relevant info、fingerprint registration. The interface is as following:


Basic info:

Input staff info in **【Basic info】** . You can also add pictures for staff. There are two ways to add pictures:


1st way: Click **【】** button, choose staffer's picture stored in PC and open **【Edit picture】** window as following,

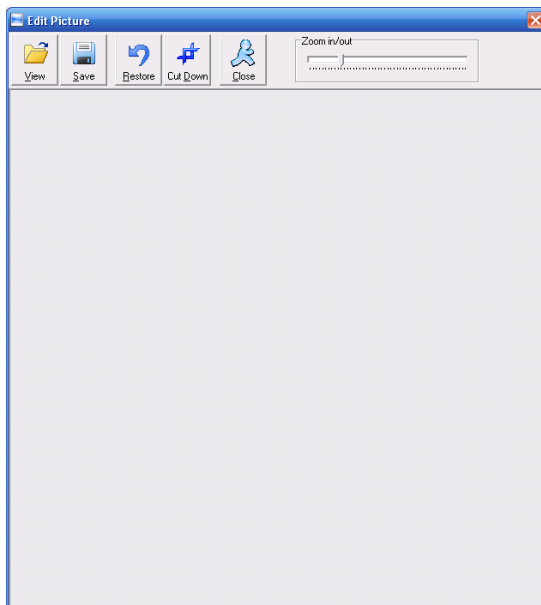


Click **【view】** button, it will pop-up 'Open' window, choose staffer's picture in its directory:

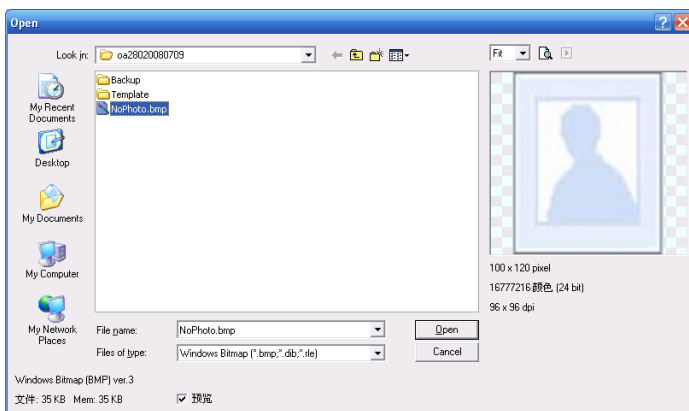

Click **【Open】** button to open picture:

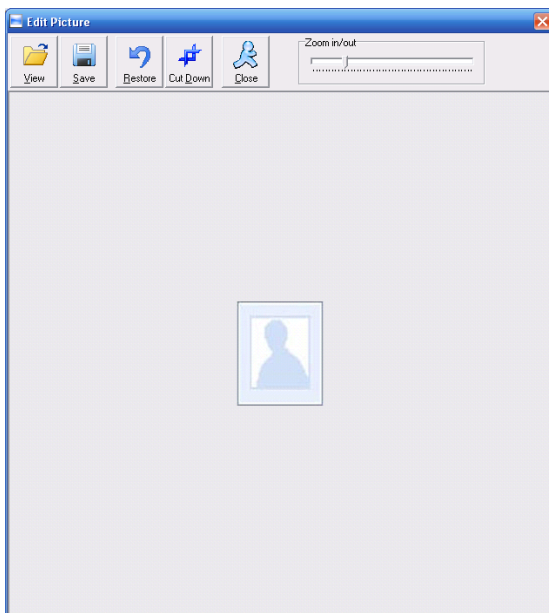

Firstly you need to cut the picture. Use the mouse to choose the area needed cut. You can also mouse to pull adjusting the area. Then click **【Cut down】** button. After cutting down, the picture is as following,

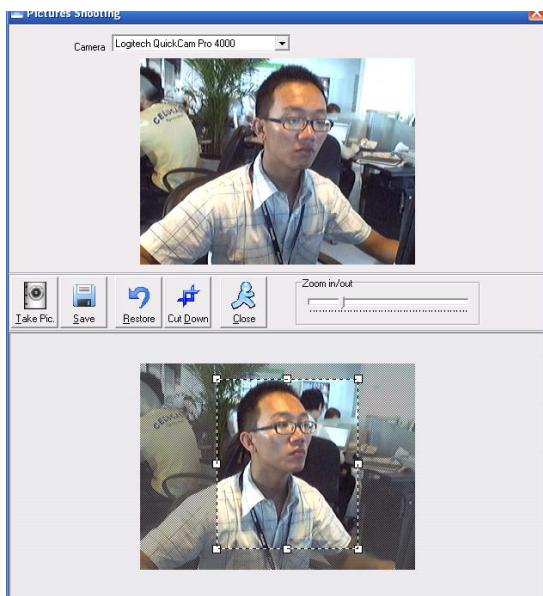


If you are not satisfied with it, click **【resume】** button to restart cutting down picture. If you want to cancel this operation, please click **【close】** button and exit to **【Add/modify staffer info】** window.

After cutting down the picture completed, click **【Save】** button to save picture and exit to **【Add/modify staffer info】** window. Then this staffer's picture will show at the right-up corner as following,


The screenshot shows the 'Add/Modify Staffer Info' window. The 'Basic Info' tab is selected. The fields are: No. 11, Card No. (empty), Name Simon, Sex Male, Dept. Human Resource. A photo of a man is shown in the top right. Below the photo are buttons for search, refresh, and delete. At the bottom, there are two lists: 'Terminals not Authorized' (containing '1[1]') and 'Terminals Authorized' (empty). Between these lists are buttons for moving terminals: '->', '->>', '<-', and '<<-'.

2nd way: You can install camera to take pictures and edit then save. Make sure there is camera equipment installed in your PC.

Click **【】** button, open **【Pictures shooting】** window as following,

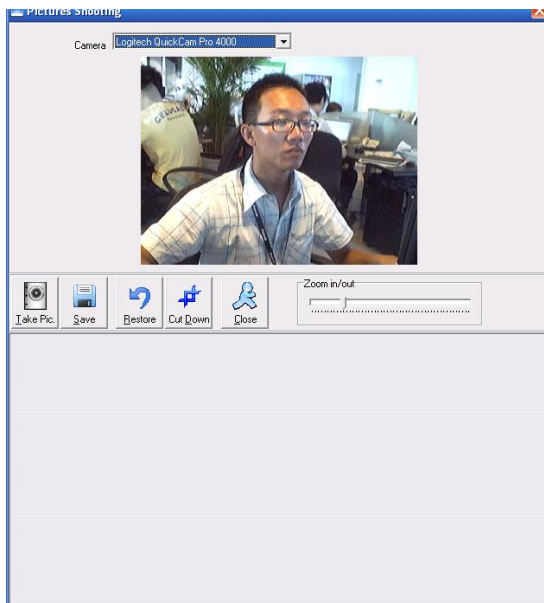

Choose camera equipment, the buttons in menu will be activated since the image shows. Adjust the image then click **【take pictures】** button. The picture will show below. Then please use mouse to choose the cut down area as following,

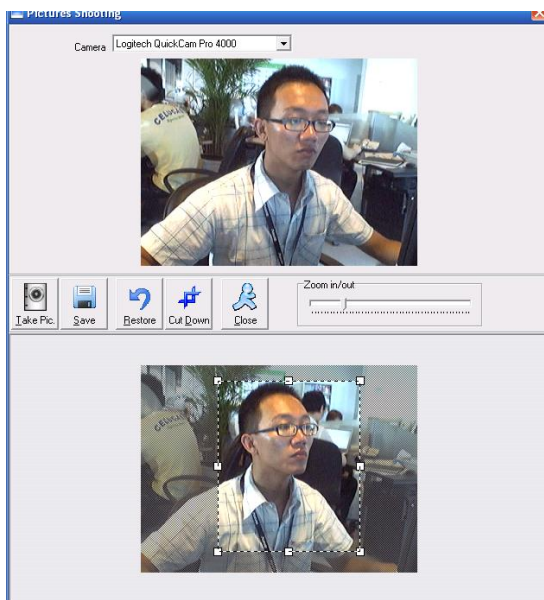


Next the way of cutting down picture is the same as 1st way. Please refer to it.

When staffer's picture exists but you don't want to set picture for staffer, you can click **【✖】** button to clear the staffer picture.

After setting staffer's picture completed, the next step is to authorize the staff to attendance terminal. (For example, the head office has two sub-companies 1, 2, if the staffer belongs to sub-company 1, so he should be authorized to the terminal named Sub-company 1).


The screenshot shows the 'Add/Modify Staffer Info' window. The 'Basic Info' tab is selected. Fields include: No. (11), Card No. (empty), Name (Simon), Sex (Male), and Dept. (Human Resource). A photo of a man is shown on the right. Below the photo are buttons for search, refresh, and delete. At the bottom, there are two lists: 'Terminals not Authorized' containing '1[1]' and 'Terminals Authorized' which is empty. Between the lists are buttons for adding and deleting terminals. At the bottom, there is a section for 'T&A Method and access permission' with radio buttons for 'Card+FP/Password', 'Card+Password', 'Card+FP+Password', 'Card+FP', 'FP+Password', and 'Access Permission' (which is selected). 'Save' and 'Cancel' buttons are at the bottom right.

Choose the terminal the staffer belongs to in **【Terminals not authorized】**, click **【-->】** (add single) or **【-->>】** (add all) button and add it to **【Terminals authorized】** list. You can also use **【<--】** and **【<<--】** button to delete **【Terminals authorized】** as following,

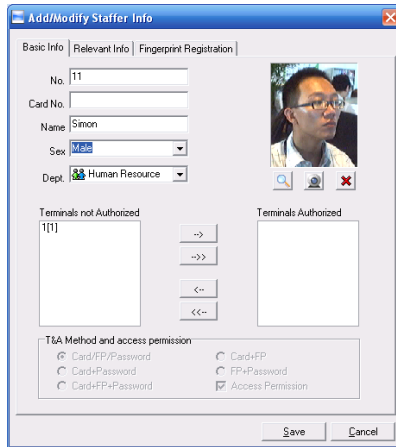

The 'Add/Modify Staffer Info' dialog box has three tabs: 'Basic Info', 'Relevant Info', and 'Fingerprint Registration'. The 'Basic Info' tab is active, showing fields for 'No.' (11), 'Card No.', 'Name' (Simon), 'Sex' (Male), and 'Dept.' (Human Resource). A photo of a man is displayed on the right. Below these fields are two lists: 'Terminals not Authorized' containing '11' and 'Terminals Authorized' which is empty. Between the lists are four arrow buttons: '->', '->>', '<-', and '<<'. At the bottom, the 'T&A Method and access permission' section has radio buttons for 'Card/FP/Password', 'Card+Password', 'Card+FP+Password', 'Card+FP', 'FP+Password', and a checked checkbox for 'Access Permission'. 'Save' and 'Cancel' buttons are at the bottom right.

If there is no input ID and authorize terminals, there will be system prompt:

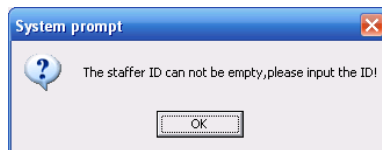


The 'System prompt' dialog box features a question mark icon and the text: 'The staffer ID can not be empty, please input the ID!'. An 'OK' button is centered at the bottom.

Click **【OK】** button to input staff info again.

After authorizing terminal info, the next step is to set staffer T&A method and access permission. OA280 has 5 identification methods. When adding staffer info in software, the default status is card / FP / password T&A method and access permission allowable.

Firstly choose the terminal in **【terminals authorized】** list then set T&A method and access permission as following,

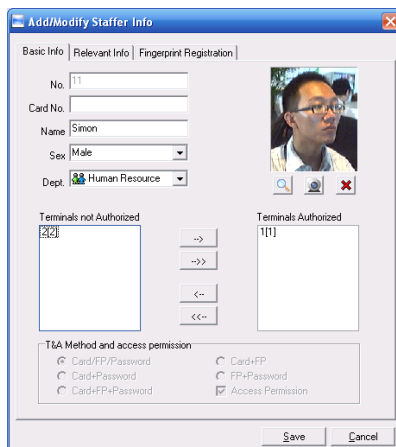

This screenshot shows the 'Add/Modify Staffer Info' dialog box after a terminal has been authorized. The 'Terminals Authorized' list now contains '11', and '11' has been moved from the 'Terminals not Authorized' list. The 'T&A Method and access permission' section remains the same, with 'Access Permission' checked. The 'Save' and 'Cancel' buttons are at the bottom right.

Prompt: you must choose the terminal in 【terminals authorized】 list, else 【T&A method and access permission】 is limited.

Relevant info: click 【Relevant info】 option, input information in these items as following,


The screenshot shows a Windows-style dialog box titled "Add/Modify Staffer Info" with three tabs: "Basic Info", "Relevant Info", and "Fingerprint Registration". The "Relevant Info" tab is active. It contains several input fields and dropdown menus. The "ID No." field contains "123456789". The "Nation" dropdown is set to "chinese". The "Position" dropdown is set to "Salesman". The "Education" dropdown is set to "master". The "Phone" field contains "45678912". The "Native Place" and "Address" fields are empty. The "Birthday" dropdown is set to "1980-1-1". The "Employ Date" dropdown is set to "2008-7-15". The "Political Feature" and "Specialty" dropdowns are empty. The "Mobile" field is empty. At the bottom right, there are "Save" and "Cancel" buttons.

Fingerprint registration: click 【Fingerprint registration】 option and connect FP sensor reader to register FP.


If there is prompt 'Fingerprint sensor reader not connected' as following,

The screenshot shows the same "Add/Modify Staffer Info" dialog box, but with the "Fingerprint Registration" tab active. It displays the "FP Enroll condition" section with two checkboxes: "First Fingerprint" and "Second Fingerprint", each with an "Enroll" button next to it. Below this, a red error message "Fingerprint sensor reader not connected" is displayed. There are two empty rectangular boxes for fingerprint images. At the bottom right, there are "Save" and "Cancel" buttons.

Please firstly connect sensor to PC, when the prompt info becomes to 'Connect to fingerprint sensor reader successfully', you can start to register FP as following,

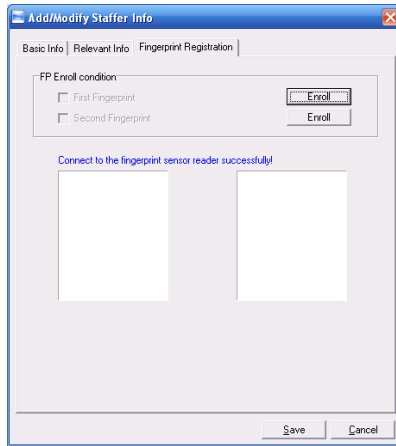

Click 【Enroll】 button, 'Please press your finger' will prompt as following,

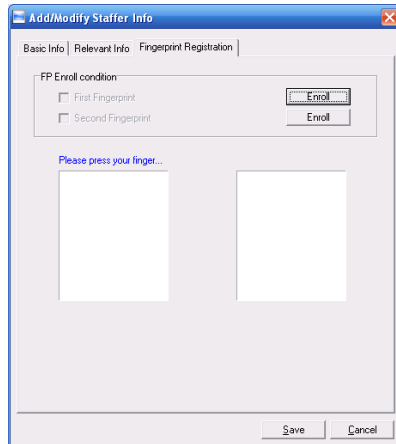

Then press your finger on the sensor scanner glass to register FP. After success, the interface will show below,



Register the second finger in the same way. After success, the interface is like below,



After setting staffer info completed, click **【save(S)】** button to save staff info. If you need cancel the staffer info added, click **【Cancel(C)】** button.

4.5.2 Modify staffer


Modify staffer is to modify the database staffer info in local PC.

Choose the staffer info from staffer info list and click **【Modify staffer】** button or double click this staffer info, open **【add/modify staff info】** window to modify. For detail, please refer to 4.5.1 **【Add staffer】**.

4.5.3 Delete staffer

Delete staffer is to delete database staffer info in local PC.


Choose staffer from staff info list (you can choose some or one through **【Shift】** or **【Ctrl】** key), click **【Delete staffer】** and the following window pop-up,



4.5.4 Transfer department

When staffers are transferred, there is necessary to transfer them between different departments. Transfer department enable realize this function.

Choose staffer info who need to transfer department in staffer info list (you can choose some or one through **【Shift】** or **【Ctrl】** key), click **【transfer department】** to open **【Staffer transfer】** window as following,

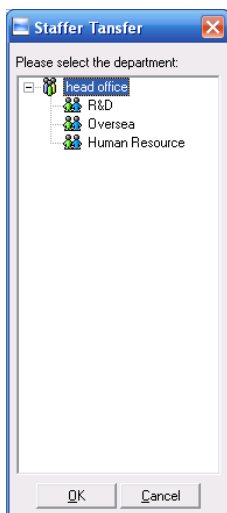


Choose the department which staffer transfer to, click **【OK】** button to save transfer info. Click **【Cancel】** button to exit.


4.5.5 Copy privilege

Copy privilege is to copy staffers' T&A method and access permission.

Choose staffer info who need to set T&A method and access permission in staffer info list (you can choose some or one through **【Shift】** or **【Ctrl】** key), click **【Copy privilege】** to open **【Copy privilege】** window as following,

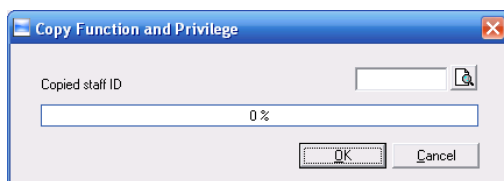

Input the staffer ID who will be copied and click **【OK (O)】**, system will pop-up confirm info:

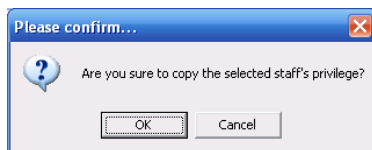


Click **【OK (O)】** button and it will start coping privilege. Click **【Cancel】** button to exit. After copying completed, system will prompt as following,



Click **【OK】** button to save this operation.

During inputting staffer ID who are copied, if you want to check his/her privilege status, click **【privilege setting status】** window to check as following,

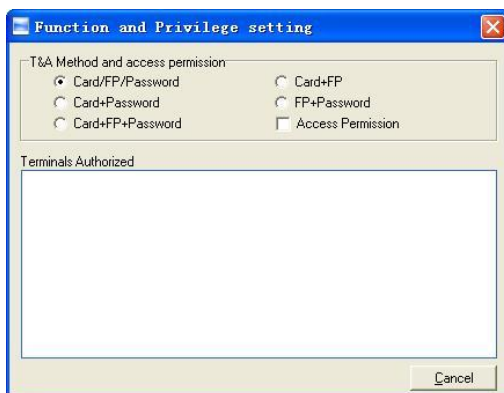


Prompt: when **【privilege setting status】** window opens, all functions in **【copy privilege】** window are limited. Only firstly click **【exit(C)】** button and close **【privilege setting status】** window, you can do other operations.

4.5.6 Download FP


Download FP is to download staffers' FP stored in attendance terminal to PC which will not download staffer info. Please make sure staffer info has existed before downloading FP.

Choose staffer info who need to download FP in staffer info list (you can choose some or one through **【Shift】** or **【Ctrl】** key), click **【download FP】** and system will prompt if the operation will continue or not, as following,

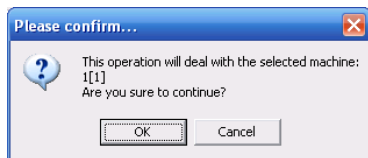


Click **【OK】** button and start download the staffers' FP info from terminal. Click **【Cancel】** to exit.

Downloading process is as following,

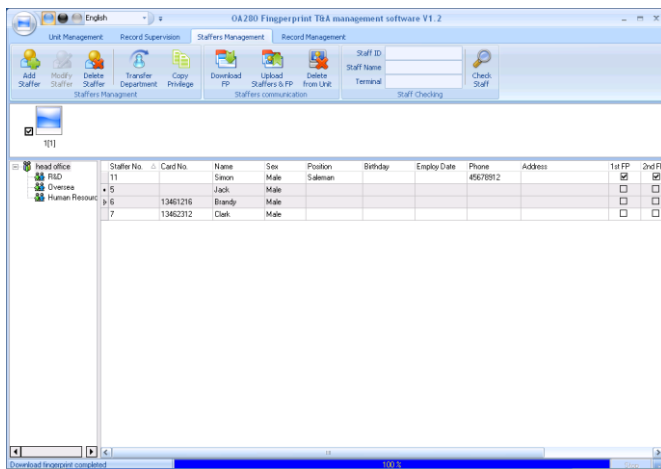

After downloading completed, status menu will prompt 'Download fingerprint completed' as following,

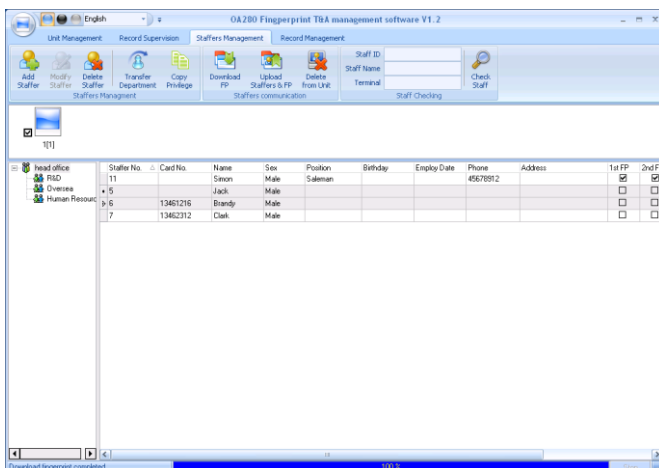


4.5.7 Upload staffer & FP

Upload staffer & FP is to upload staffer info stored in PC to terminal.


Note: the function of 'upload staffer & FP' is the same as 'resume staffer' which both store staffer info to terminal. The difference is upload staffer & FP enable user choose staffers who need to be uploaded but 'resume staffer' is to upload all the staffers stored in database to terminals.

Choose staffer info who need to upload FP in staffer info list (you can choose some or one through **【Shift】** or **【Ctrl】** key), click **【download FP】** and system will prompt if the operation will continue or not, as following,

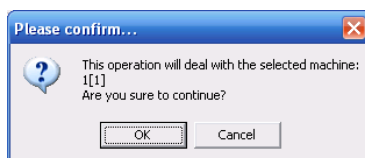


Click **【OK】** button to upload staffers' info and FP from PC . Click **【Cancel】** button to exit.

Uploading process is as following,

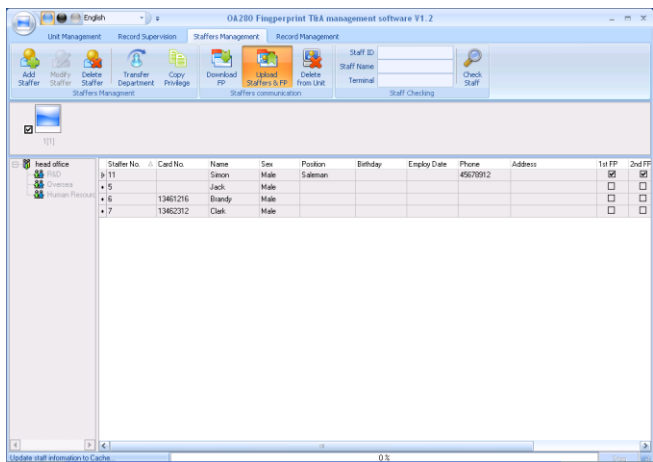


After uploading completed, the status menu prompts 'Upload staff and fingerprint completed' as following,

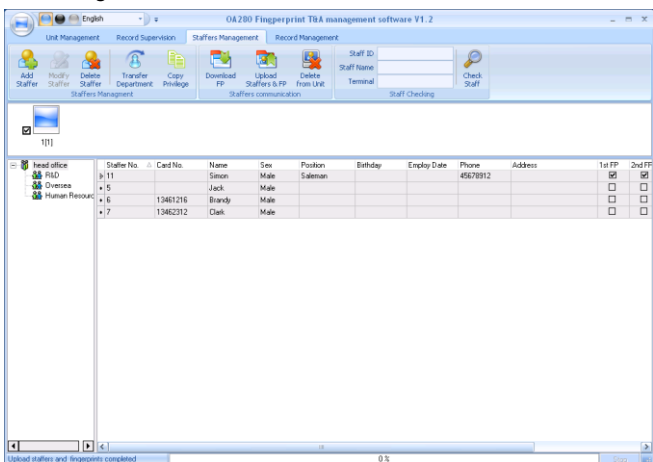

4.5.8 Delete staffer from unit


'Delete staffer from unit' is meaning delete staffer info from unit through software. Choose staffer info need be deleted in staffer info list (you can choose some or one through **【Shift】** or **【Ctrl】** key), click **【delete staffer from unit】** and system will prompt as following,

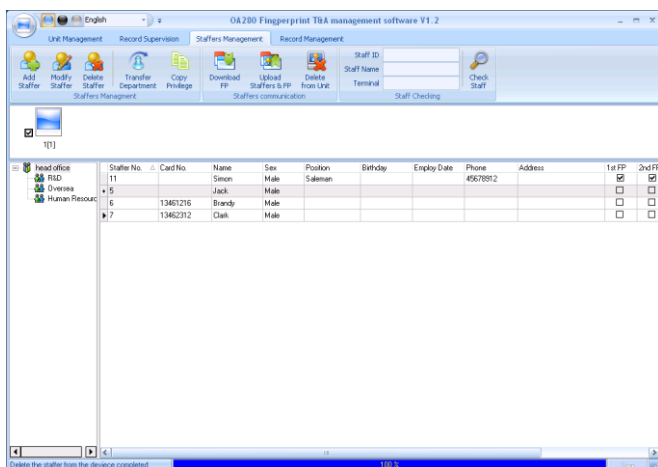


After deletion successfully, the terminal device ID the staff belong to will be deleted from 【unit】 as following,

4.5.9 Check Staff

Input the info of the staffer like ID, name, unit location which are no necessary to fill up. Click 【Check staff】 button and correct staffer info will show in the list,

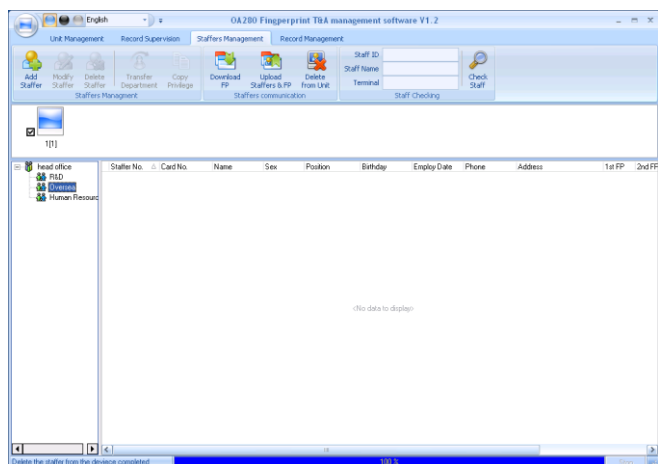

If you don't input any staffer info, click 【Check staff】 button, the results are all the staff info.

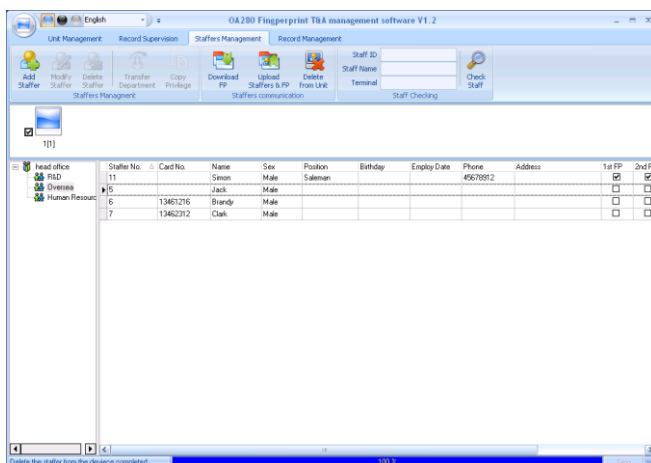

4.6 Record management


4.6.1 Search record

Search record is to search the downloaded attendance records in the time range.

Firstly set the date. Click the box after **【Begin date】** and **【End date】**, there will pop-up calendar info as following,



Choose the date for checking records, click **【Search record】** button, all the records according with the date range will show in the list below as following,

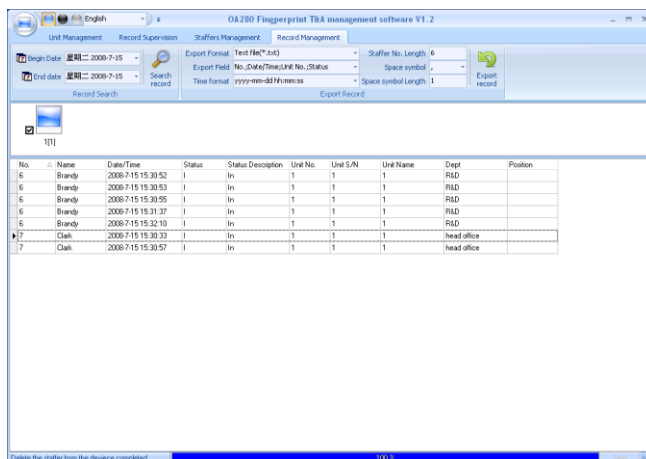

4.6.2 Export record


Export record is to backup the data stored in the database of PC to other space, so that if the current database is abnormal, it can be used to resume data.

Firstly set the items in export record such as export format:


Export format: 3 formats optional: text file (.txt), CSV file (.csv), Excel files (.xls).



Export field: users can choose important fields or all to export.



Time format: 4 formats optional




Staffer No. length: set staffer No. length, the default is 6 digits.

Space symbol: space symbol to separate fields

Space symbol length: space symbol bit

After setting completed, click **【Export record】** button, open 'Save as' window,

choose save file directory, input file name as following,

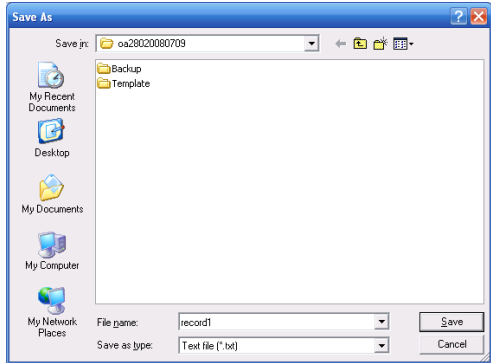


Click **【Save (S)】** button, then system will prompt as following,



Click **【OK】** button to confirm finishing export records.


4.7 Other settings

Click  button, pop-up the following menu,

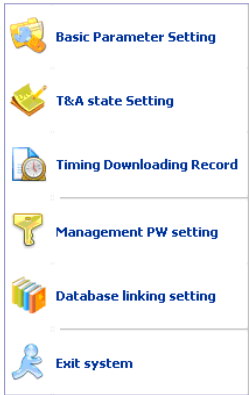

4.7.1 Basic parameter setting

Click **【Basic parameter setting】** item, pop-up **【Basic parameter setting】** window as following,

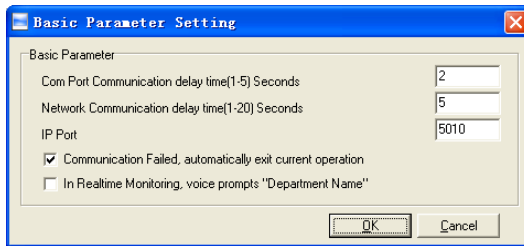


Com port comm. ... delay time (1-5) sec.: The default delay time is 2 sec.

Network comm. ... delay time (1-20) sec.: The default delay time is 5 sec.

IP Port: The default port is 5010. You can modify it based on the real situation.


Communication failed, automatically exit current operation:

In real-time monitoring, voice prompts 'Department name':



4.7.2 T&A status setting

Click **【T&A state setting】** item, pop-up **【T&A status setting】** window as following,

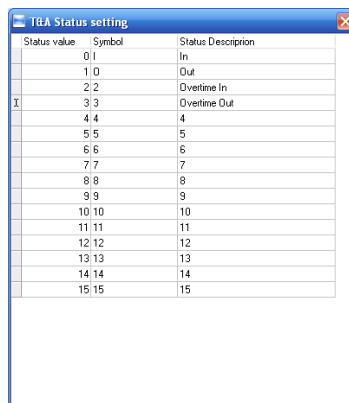

Click the state needed modified, input status description, then click **【Enter】** or continue clicking other status to set.

4.7.3 Timing downloading record

Click **【Timing downloading record】** item, pop-up **【Timing downloading record】** window as following:




Firstly tick Run timing downloading record item, then set timing downloading function. Or else, this function is limited.

Click **【****】** button to adjust time, and **【Add】** button to add the set times to **【Timing downloading record】** input box.


Note: the input box does not allow input by hand.

Click **【OK】** button to confirm running timing downloading record function and system will prompt:



Click **【Cancel】** button to cancel the timing downloading settings.


If no set time, click **【OK】** button, system will prompt:



Click **【OK】** button and set the timing downloading time again.

4.7.4 Management PW setting

Click **【Management PW setting】** item, open **【Modify management password】** window as following,

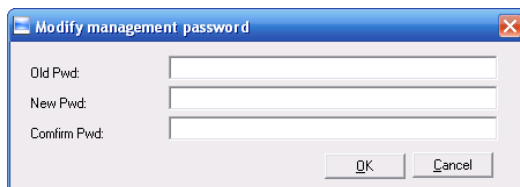


Old password: default password is empty. If user has modified password, please input this password which is used to log on system. If it's wrong, system will prompt,



Click **【OK】** and input old password again.


New Pwd: the password user wants to set

Confirm Pwd: input new password again to confirm. If confirm Pwd is different from new one, system will prompt:

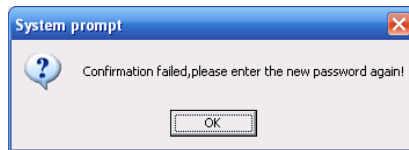

Click **【OK】** button to input confirm password again.


After modifying completed, click **【OK】** button to save new password and system will prompt:




Click **【Cancel】** button to exit.

Database linking setting


Click **【Database linking setting】** item, pop-up **【Data link properties】** window as following,

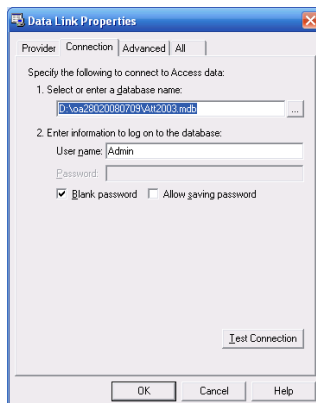


Click **...** button beside **1. Select or enter a database name:** to choose the linking database directory.

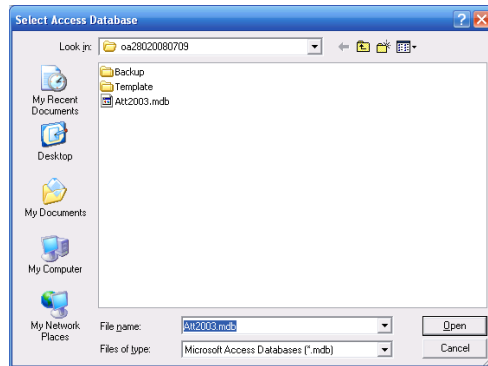

Choose database name, click **Open** button to confirm database linking and exit to **Data link properties** interface. If database had set ID and password, input ID and password in **2. Enter information to log on to the database** . After completed, click **Test connection** to test the connection correctness of the database and system prompts,




Click **OK** button to **Data link properties** interface. Click **OK** button and system prompts,

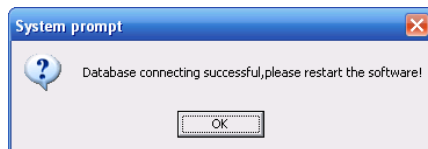

Click **OK** button to exit.

4.7.5 Exit system

Click **Exit system** item, pop-up confirm info,




Click **【OK】** button to exit management software system. Click **【Cancel】** button to cancel this operation.


4.8 Software Interface Setting

4.8.1 Interface skin color

Choose  button in title menu which enable change software interface color. The style is Windows XP system style as following,





Blank



Silver

4.8.2 English/Chinese interface converting

Choose  button in title menu which enable convert between English and Chinese interface. The following is Chinese interface:

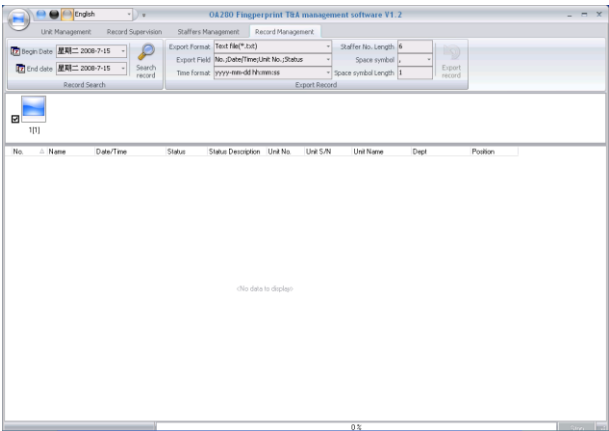

Chapter5 Background Management

The main theme of this chapter is how to collect attendance records from different terminals with management software and generate different reports. The background software can manage staff information, set rules of attendance etc.




5 Background management

Management software can collect attendance records from different terminals, calculate according to shift setting and finally generate different reports. The background software can manage staff information, set rules of attendance etc.


5.1 Log in system



Double click the icon on the desktop to start the attendance background management program. The log-in interface will pop up as follows:

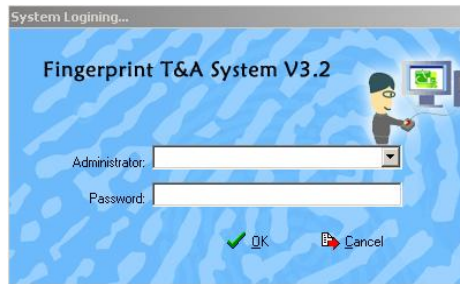

The default administrator's name is "Admin" and password is empty. Log in system and the following interface will be displayed:

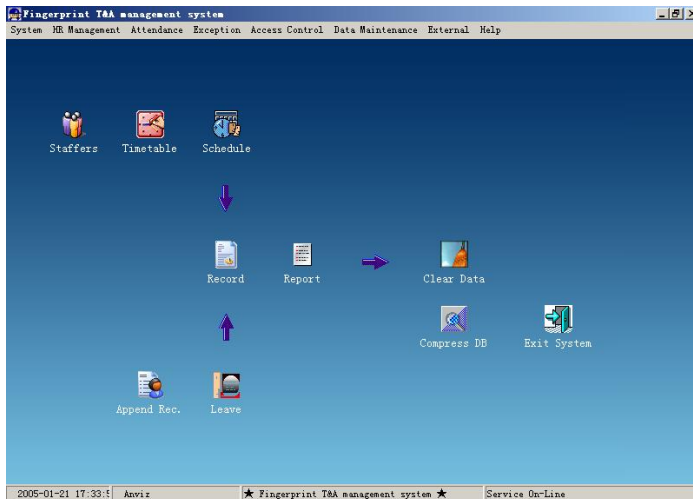

The main interface includes three parts:

1. System menu: Include the whole function module& information
2. Shortcut button: Shortcut button of common function module, array in working order, easy to work on

3. Status column: Show the current time, logged-in administrator and system information.


5.2 System settings

Click **【System】** on the main menu, following springs:



5.2.1 Parameters Settings

Click **【Parameters setting】** in system menu. The following window will prompt:

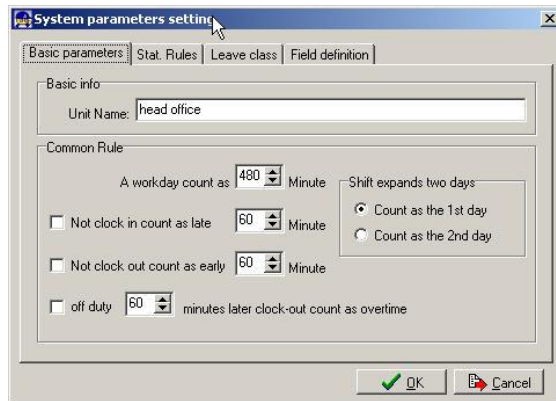

Basic parameters:

Set your company name, the default is “Head office”

Input your company name that will be deemed as the head of departments list.


A working day count as how many minutes is the base for time attendance calculation which will be the transition standard to calculate the late to work/early to leave /free overtime items, minute is the good transition standard of hours and working day.

“Late for work as how many minutes” can be set when no clock-in on duty, “early to leave as how many minutes” when no clock out for off duty. Free overtime work can also be calculated on the base that how many minutes working after off duty time.

“Shift expand two days” is set under real condition.

Stat. Rules:

Click page **【Stat. Rules】** , following shows:

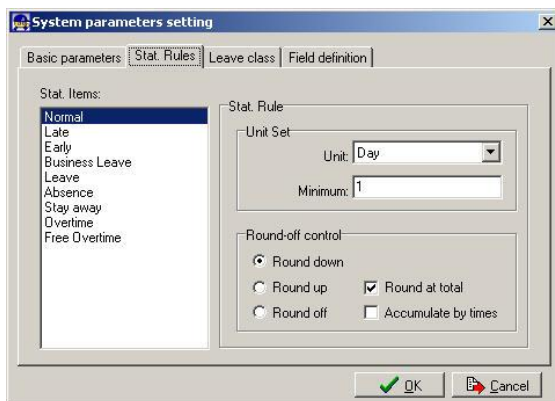

This page describes the stat. rules of items: normal, late, early, business leave, leave, absence, overtime, free overtime.

Accumulate by times: Only calculate the total times, display the accumulated times in report.

Round at total: Add up the total time and then round according to corresponding unit.

Round down: Abandon the decimal regardless it is. For example, if the minimum calculation unit is 1 day, if the accumulated time is 1.1 days or 1.9 days, the result of calculation is 1 day.

Round up: Add one unit regardless the decimal is. For example, if the minimum calculation unit is 1 day, if the accumulated time is 1.1 days or 1.9 days, the result of calculation is 2 day.


Round off: If the decimal is equal to or over 0.5, add one unit, or else, abandon it.

(Note: the setting of stat. Rules above will directly affect the statistical result

Please make above setting according to the true status of your company to ensure the accuracy of reports.)

Leave class:

Click **【Leave class】** , following shows:

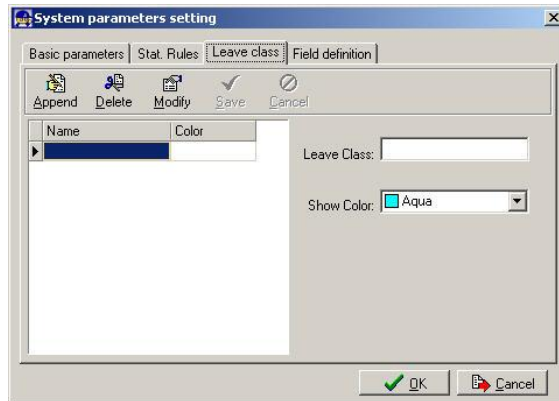

Add new leave class:

Click **【Append】** input the name of leave class and choose color and click **【save】** to finish.


Revise leave class:

Select the name of leave class which one need to be revised, click **【Modify】** , input new name of leave class and color, click **【Save】** to finish.

Delete leave class:

Select the name of leave class which one need to be deleted, click **【Delete】** , click **【OK】** to finish.


Field definition:

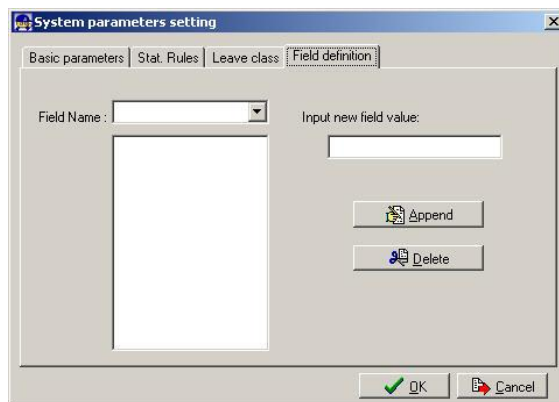

This page add the corresponding value for **【Nation】** . **【Specialty】** . **【Position】** . **【Education】** in menu **【Staffer maintenance】** .

5.2.2 Administrators

Click **【System】 - 【Administrators】** , following window shows:

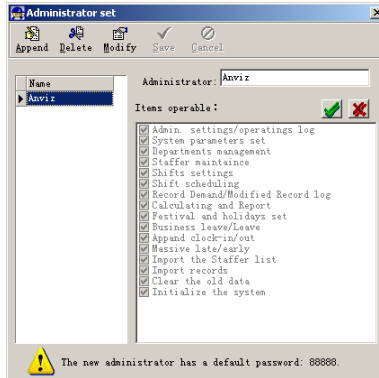

Append new administrator:

Click **【Append】**—input the name of new administrator within input field of **【Administrator】** , select corresponding privileges below and click **【Save】** to finish adding of new administrator. The default password of new administrator is 888888. Please log in as the new registered administrator and click menu **【System】 -- 【Administrator's password set】** to set new password of administrator for system security.

(Note: When many administrators operate the software, it is necessary to set the access right for each administrator. That is to say: when an administrator log in, the functions he can operate are limited.)

Modify administrator:


Select the name of administrator, click **【Modify】** , input new name of administrator and corresponding rights in **【Administrator】** and click **【Save】** to finish.

Delete administrator:

Select the name of administrator who will be deleted and click **【Delete】** to finish deleting according to the prompt.

5.2.3 Administrator's password set

Click menu **【System】 -- 【Administrator's password set】** , following springs:

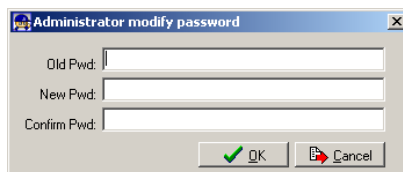

Input the original password in **【Old Pwd】**, enter the new password in **【New Pwd】**, and enter new password again in **【Confirm Pwd】** and click **【OK】** to finish.

5.2.4 Modified record log

Click menu **【System】** -- **【Modified record log】** , following springs:

Attendance Calculating and Report

Department: head office | Time Range: From 2005-1-24 0:00:01 To 2005-1-30 23:59:59

Staffer: All

Buttons: Calculate, Report, Export, Exception

Department	Name	Staffer No.	Date	Timetable	On Duty	Off Duty	Clock In
------------	------	-------------	------	-----------	---------	----------	----------

Select department, staffer ID and time range and click **【Search】** and those records which match the above condition will be displayed as follows:

Attendance record modification log

Department: head office | Time Range: From 2005-1-24 0:00:01 To 2005-1-30 23:59:59

Staffer No.: All

Buttons: Search, Restore, Close

Department	Staffer No.	Name	Clocking Time	State	Modify type	Reasons	Administrator
	180001		2005-01-24 13:00:00	Clock In	Add	Forgetting clock in/out	Anviz
	180001		2005-01-24 09:00:00	Clock Out	Add	Forgetting clock in/out	Anviz
	180001		2005-01-24 10:00:00	Clock Out	Add	Forgetting clock in/out	Anviz
	180001		2005-01-24 11:00:00	Clock Out	Add	Forgetting clock in/out	Anviz
	180001		2005-01-24 12:00:00	Clock Out	Add	Forgetting clock in/out	Anviz
	180002		2005-01-24 12:00:00	Clock Out	Add	Forgetting clock in/out	Anviz
	180003		2005-01-24 12:00:00	Clock Out	Add	Forgetting clock in/out	Anviz
	180004		2005-01-24 12:00:00	Clock Out	Add	Forgetting clock in/out	Anviz
	180005		2005-01-24 12:00:00	Clock Out	Add	Forgetting clock in/out	Anviz
	180006		2005-01-24 12:00:00	Clock Out	Add	Forgetting clock in/out	Anviz
	180007		2005-01-24 12:00:00	Clock Out	Add	Forgetting clock in/out	Anviz
	180008		2005-01-24 12:00:00	Clock Out	Add	Forgetting clock in/out	Anviz
	180009		2005-01-24 12:00:00	Clock Out	Add	Forgetting clock in/out	Anviz
	180010		2005-01-24 12:00:00	Clock Out	Add	Forgetting clock in/out	Anviz
	180001		2005-01-24 13:00:00	Overtime In	Add	Forgetting clock in/out	Anviz
	180002		2005-01-24 13:00:00	Clock Out	Add	Forgetting clock in/out	Anviz
	180003		2005-01-24 13:00:00	Clock Out	Add	Forgetting clock in/out	Anviz
	180004		2005-01-24 13:00:00	Clock Out	Add	Forgetting clock in/out	Anviz
	180005		2005-01-24 13:00:00	Clock Out	Add	Forgetting clock in/out	Anviz
	180006		2005-01-24 13:00:00	Clock Out	Add	Forgetting clock in/out	Anviz
	180007		2005-01-24 13:00:00	Clock Out	Add	Forgetting clock in/out	Anviz
	180008		2005-01-24 13:00:00	Clock Out	Add	Forgetting clock in/out	Anviz
	180009		2005-01-24 13:00:00	Clock Out	Add	Forgetting clock in/out	Anviz

RecordCount: 43


Note: Modified record log shows all the time attendance record modifications; If there's record that has been revised incorrectly before, it can be recovered by selecting

this record and clicking **【Restore】**

Click **【Close】** to exit.

5.2.5 Managing Log

Click menu **【System】** -- **【Managing log】** , following springs:

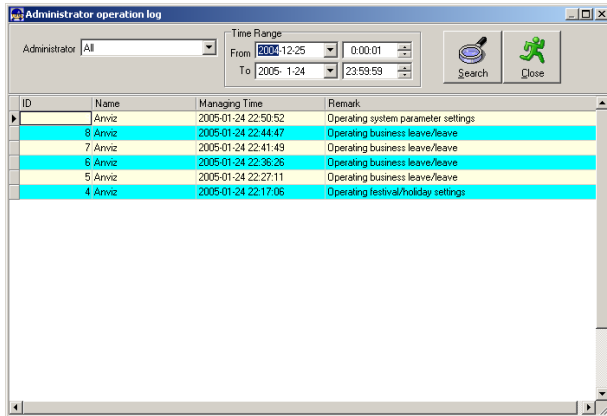


This log records all the operations of every administrator. Select **【Administrator】** and the time range then click **【Search】** to see what operations have been done by this administrator within the selected time range, which makes it possible that the multi-administrators can use the software at the same time.


5.2.6 Set Database Link

This system adopts the database interface of Microsoft ADO. The acquiescence database is Access2000.The defaulted is att2003.mdb under the main setup directory. You can set up the database linking again according to the actual conditions.

When the following mistake appears, you should link database again:

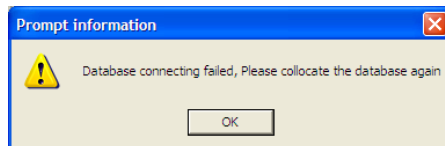


Click **【Database linking】** in system menu, the following springs.

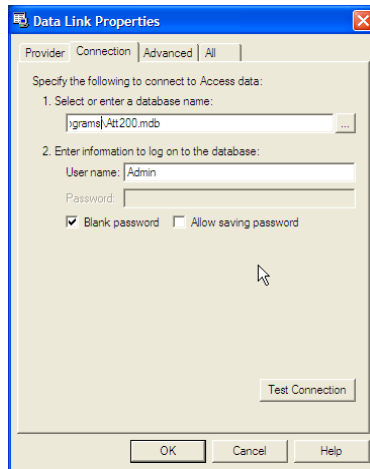

Input the database name or click the  button to select the correct database file. .
(Note: you can click **Test connection** to test the connection correctness of the database.)

5.2.7 Exit System


Click **Exit system** in System menu. The following menu springs.



Click ok to exit management software and return to Windows system.


5.3 HR management

Click **HR Management** on the main menu, Following springs:



5.3.1 Department management

Click **Department Management** in the **HR Management** menu, springs the following window:

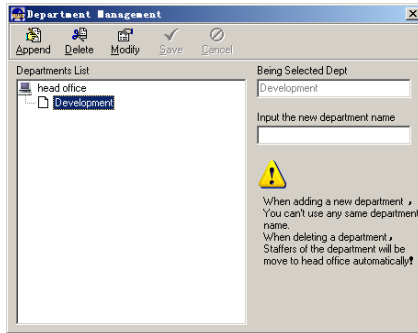

Add a new department


Click **【Append】** , input the new department name and click **【Save】** to add a sub department for the chosen department.

Department modification

Choose the department, click **【Modify】** and input the new department name, then click **【Save】** .

Delete the department

Choose the department, click **【Delete】** and then click **OK** to complete.



(Note: repetition of department name is not allowed; if there are staffers existing in the deleted department, those staffers will be automatically transferred to department of head office.)

5.3.2 Staffer maintenance

Click **【Staffer Maintenance】** in **【HR Management】** menu, the following window appears:

Staffer No.	Name	Department	Position	Employ Date	Telephone	Address
1008	Dixon	Engineer		2005-02-18		
1020	Hujun	Engineer		2005-03-01		
1006	Huwei	Engineer		2004-12-29		
1010	Hugu	Head Office		2004-12-29		
1003	Liy	Head Office		2004-12-29		
1004	Nixu	Head Office		2004-12-29		
1009	Niux	Head Office		2005-02-25		
1012	Suncu	Head Office		2004-12-29		
1014	Wanch	Development		2004-12-29		
1018	Xiaoqi	Development		2005-02-26		
1019	Xiaocan	Development		2005-03-01		
1011	Xushu	Development		2004-12-29		
1016	Yanhu	Development		2005-02-26		
1002	Younwen	Development		2004-12-29		
1005	Zhang	Development		2004-12-29		

Append staff

Choose the department that the staffs belong to, clicks **【Append】**, and input staff's information, then click **【Save】** to complete.

(Note: The items of "Calculate attendance", "Calculate overtime", "Rest on holiday" below "Attendance Set" is correlated with report, please set it correctly. If the checkbox of "Calculate Attendance" of this staffer is not checked, there will be no statistical result for this staffer in the report. If checkbox "Calculate Overtime" is not checked, the statistical result of overtime of this staffer will be 0, unless he had **【Temporary Shifts】** which defines as overtime working; If the checkbox of "Rest On Holiday" is not checked, holidays will make no effect on the shifts for this staffer; if the checkbox of "Rest On Holiday" is checked, thus for those holidays, even there are shifts on those days for the staffer, those shifts will be invalid. And if there are time attendance records of this staffer, those records will be deemed as free overtime.

Staff's modification

Choose the staff, click **【Modify】** and input the new information, then click **【Save】**.

(Note: Staffer ID is the exclusive identity of staffer, which can only be added or deleted, but not revised!)

Staff's deletion

Choose the staff, click **【Delete】** and then click **【OK】** to complete.

Please be cautious when delete the staff since all this staffer's time attendance

records, shift arrangement will be deleted at the same time.

Import staffers:

Click **【Import】** , staffer importation window springs for importing staffers.

Staff's department shifting

Choose the staff you want to shift the department, click **【Transfer】** and following window will pop up:




Select the new department and click **【OK】** to complete.

Export Staff:

Right-click on staff list and the following window pops:


Staffer ...	Name	Department	Position	Employ Date	Telephone	Address
1004		Denis International				
1005		Denis International				
1006		Denis International				
1007		Denis International				
1008		Denis International				
1009		Denis International				
101		Denis International				
1010		Denis International				
102		Denis International				
103		Denis International				
104		Denis International				
105		Denis International				
106		Denis International				
107		Denis International				
108		Denis International				



All displayed fields in staff info list can be defined through submenu of “Column”. Meanwhile, the modification will take effect and be saved.

Click **【Show all columns】** to display all fields in the list.

Click **【Export Data】** and following window will prompt:

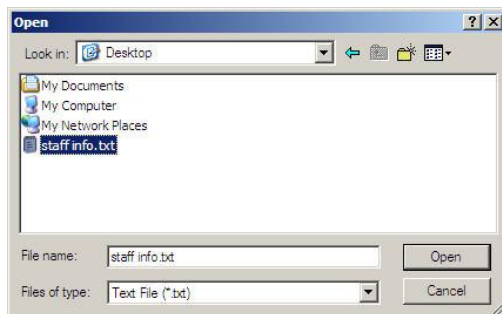


Please select your target directory of your export, file format (txt or xls) and the file name. Click **【Save】** to confirm the operation.

Notice: Exported Excel file can be used as backup information and can be imported again.


5.4 Attendance management

Click **【Attendance】** in the main menu, following springs:



5.4.1 Holidays List

Click **【Holiday List】** in attendance menu. The following appears.

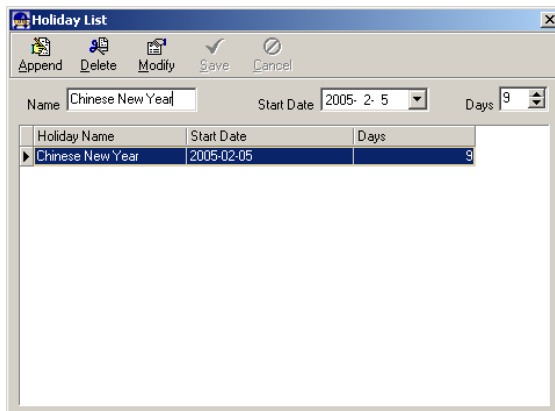

Add festivals or holidays

Click **【Append】** then input the festival or holiday name and the rules. Click **【Save】** when ready.

Modification of festivals or holidays

Select the festivals or holidays you want to revise, then click **【Modify】** and input the new information. Click **【Save】** when ready.

Deletion of festivals or holidays

Select the festivals or holidays you want to delete, and then click **【Delete】** to perform Deletion of festivals or holidays.

5.4.2 Timetable and Shift

The relationship between shift and timetables:

Shift setup should be done in two steps: First, setup necessary timetables. Second, setup shifts. One or more timetables can be included in one shift.

Timetable is the time period between On-duty and Off-duty required in the company rule. For instance, the company rule requires the working hours be 08:00-12:00 and 13:00-17:00; so 08:00-12:00 and 13:00-17:00 are two timetables. If such a shift needs to be setup, these two timetables should be setup first. Here, we use time table “morning” to indicate “08:00-12:00” and time table “afternoon” to indicate “13:00-17:00”; so two timetables have been setup. (Please refer to the following chapter for details of how to add time tables) and then we can add a shift such as “Normal shift” in which “shift cycle” and “cycle unit” will be setup. Then we should add two timetables - “morning” and “afternoon” so that a shift setup is completed. Brief introduction is mentioned here for you to get a general picture of the relationship between timetable and shift. The details of shift setup will be found in the next two sections.

Timetable maintenance:

Click **【Timetable and Shift】** in attendance menu. The following window appears.

Timetable Name	On Duty Time	Off Duty Time
Day Shift	08:00	17:00
Morning Shift	04:00	12:00
Noon Shift	12:00	20:00
Night Shift	20:00	04:00

Timetable Name: Day Shift
On Duty Time: 08:00
Off Duty Time: 17:00
Begin Clock-In Time: 07:00
End Clock-In Time: 13:00
Begin Clock-Out Time: 16:00
End Clock-Out Time: 20:00
Late error allowance: 5 Minutes
Early error allowance: 5 Minutes
Count As Workday: 1
Count As WorkTime: 480 Minutes
☒ Must C-In ☒ Must C-Out

Picture 5.1 Timetable Maintenance

Add a new timetable

Click **【Append】** and enter the corresponding information: **【Timetable Name】** For instance: Day Shift **【On duty Time】** (08:00) **【Off duty Time】** (17:00) **【Begin Clock-in Time】** (07:00) **【End Clock-in Time】** (13:00) **【Begin Clock-out Time】** (16:00) **【End Clock-out Time】** (20:00), **【Late error allowance】** (5) **【early error allowance】** (5) **【Count as work day】** (1) **【Count as work time XXX minutes】** (480). Check **【Must C-In】** and **【Must C-out】**, Finally click **【Save】** to confirm.

(Please note: Every item should be setup in timetables with no blank left. **【Begin Clock-in Time】** and **【End Clock-in Time】** setup the valid time period for clock-in. Records out of this time range will be treated as invalid ones. For instance **【Begin Clock-in Time】** is 07:00 and **【End Clock-in Time】** is 13:00. If clock-in record is 07:01 or 12:59, they are valid records but if clock-in record is 06:59, it is invalid. Besides, **【Begin Clock-in Time】** and **【End Clock-in Time】** can be more than one day (meaning **【End Clock-in Time】** can be before **【Begin Clock-in Time】**) but it can't be longer than 24 hours.

【Late error allowance】 means how many minutes after **【On duty】** are treated as "late", **【Early error allowance】** means how many minutes before **【End Clock-in Time】** are treated as "early"; **【Count as work day】** and **【Count as work time XXX minutes】** are used in calculating business leave, leave, absence and overtime.

Checking **【Must C-In】** and **【Must C-out】** or not will affect the result of calculation. If **【Must C-In】** is checked and the timetable is included of Staff A's shift, he will be either considered absence or treated according to **【Not clock in count as late XXX minutes】** in **【Parameter Settings】** If he didn't clock in or ask for leave. Otherwise, even if there is off duty record for him only, his attendance will be treated as normal.

The timetable Modification

Select the timetable name you want to revise, and click **【Modify】**, then input the new information, click **【Save】** when finished.

The timetable Deletion

Select the timetable you want to delete, click **【Delete】**, and click **【OK】** to make sure.

(Please note: Begin Clock-in Time and End Clock-in Time makes the valid time range for Clock in. Clock in out of this time range will be treated as invalid records. It is the same with Clock-out time. Please setup in accordance with practical situations.)

Example——Add a timetable:

Complete process for adding four timetables:

Day shift 08:00 - 17:00 Morning shift 04:00 - 12:00

Noon shift 12:00 - 20:00 Night shift 20:00 - 04:00

(Other information can be setup according to practical situations. Please refer to Picture 5.1. Please note there should be no blank left.)


Shift Maintenance:

Click **【Shift Maintenance】** in Picture 5.1 and the following window pops up:

Date	Timetable 1	Timetable 2	Timetable 3	Timetable 4
Sunday				
Monday	Day Shift			
Tuesday	Day Shift			
Wednesday	Day Shift			
Thursday	Day Shift			
Friday	Day Shift			
Saturday				

Add a shift:

Click **【Append】** and enter corresponding shift information in **【Shift Name】** such as: normal shift **【Cycle】** (1), **【Cycle Unit】** (week), and click **【Add】**, select the timetables and time range required in this shift in the springing window (see the Picture B below) For instance, select the timetable – Day shift and select from Monday to Friday and then click **【OK】**, back to this window and click **【Save】** to complete. (Please refer to the example for details.)

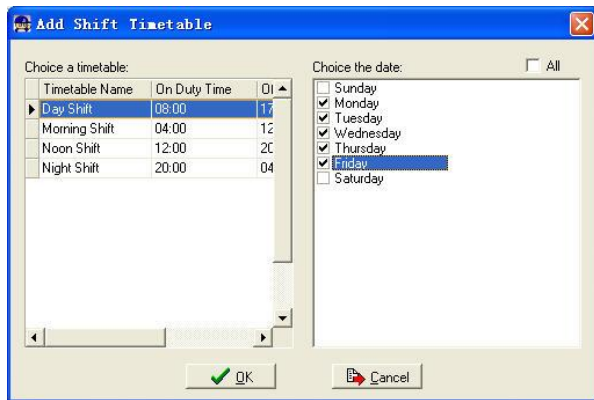

Picture B Add a timetable

Modify a shift:

Select the shift to be modified and click **【Modify】**, and enter new information in **【Shift Name】** etc. click **【Save】** to complete.

Delete a shift:


Select the shift to be deleted and click **【Delete】**.

Example——Three shifts:

Add “Three shifts” Shift (Please note: It is assumed that the shift goes around every week, cycle every three weeks and staff is on holiday every Saturday and Sunday.)

Step 1:


Click **【Append】**, enter “Three shifts” in **【Shift Name】**, set **【Cycle】** to “3” and **【Cycle Unit】** to “week”. Please see the picture below:

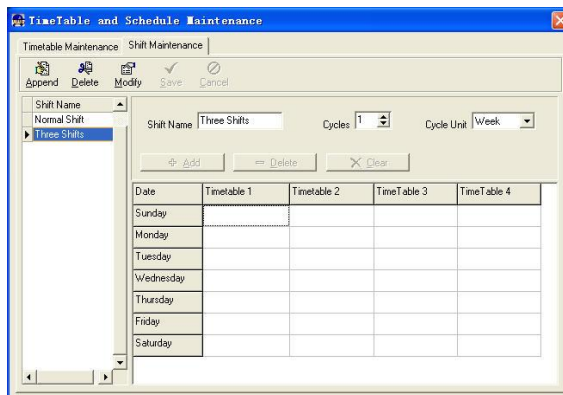

Step2

Add corresponding working hour timetable in accordance with “Cycle”: first week (morning shift, from Monday to Friday)


Click **【Add】** and the following window pops up:

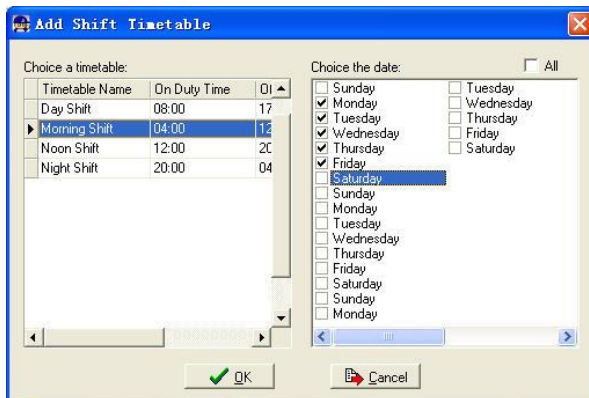

Select the timetable “Morning shift” to be added and select the time range to apply to this timetable”from Monday to Friday of the first week” and click **【Ok】** to complete the setting of the first week.

The second week (noon shift, from Monday to Friday)


Click **【Add】** , make corresponding operation in the springing window (see the result below):

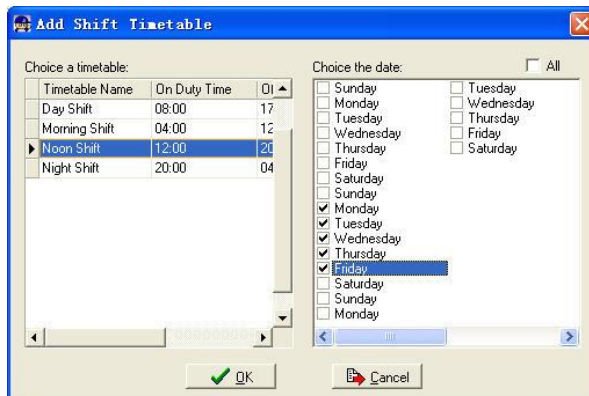

Click **【ok】** to complete the working hour setting for the second week.


The third week (night shift, from Monday to Friday)

Click **【Add】** , make corresponding operation in the springing window (see the result below):

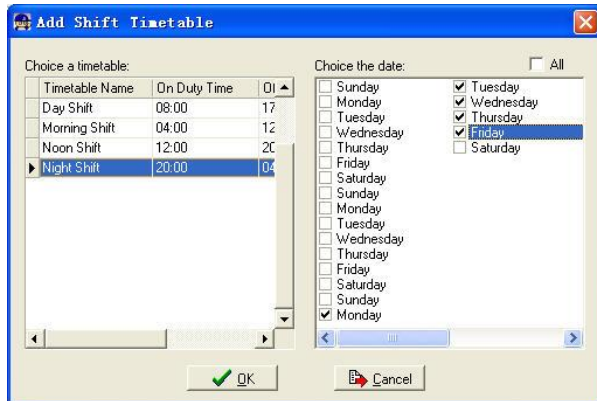

Click **【ok】** to complete the working hour setting for the third week.

After the completion of above steps, please don't forget to click **【Save】** and the setup of “three shifts” will be done (see the picture below):

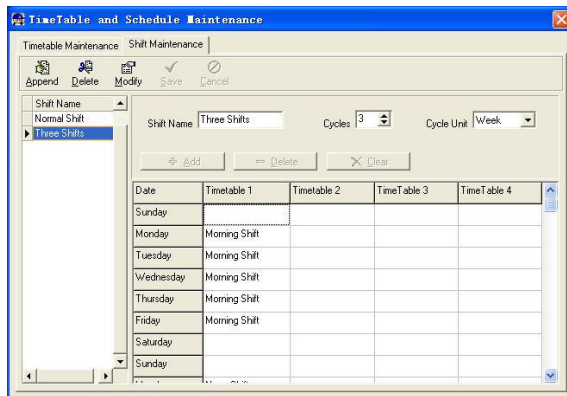

5.4.3 Staffer Scheduling

Click **【staffer scheduling】** in **【attendance】** menu. The following window appears:

Picture 5.3 Staff scheduling

Choose the department or several personnel that need to arrange shifts, click Arrange, the following window appears:

Add a new shift

Select the corresponding shifts, for instance: The commencement date and deadline of this shift of “normal class”, click Add button, clicks ok on the pop up dialog box to finish the adding of new shifts.

Please note:

If the cycle unit of scheduling is “week” and the amount of cycle is more than 2, the starting date should setup as “Sunday”.

If the cycle unit of scheduling is “month” and the amount of cycle is more than 2, the


starting date should setup as “1st day of a month”.

Deletion of the shifts


Select the shifts in the shifts which you want to delete, click Delete button, Click ok on the pop up dialog box to finish the deletion.

Arrange a temporary shift

When one or many staff's working time needs to be changed temporarily, you can arrange a temporary shift. Click add **【temporary】** the following window appears:

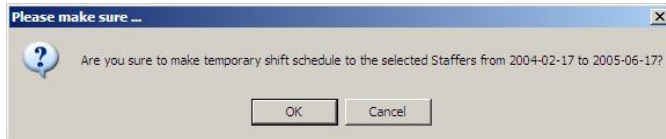

Click **【OK】** and the temporary scheduling can be operated. Then click **【Add】** and the following window will pop up:

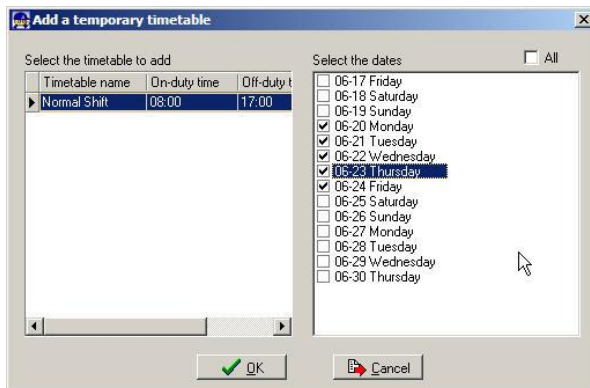

Click **【OK】** and the timetables will be saved. Click **【Save】** and the temporary scheduling will be saved.

【Delete】 :Delete the selected timetable;

【Clear】 :Delete all the timetables in the current time range;

【Cancel】 :Delete the existing temporary scheduling in the selected time range;

5.4.4 Attendance Records

Click **【Attendance Records】** in **【Attendance】** menu, the following appears:

Search Staffer's Attendance Record

Department: head office

Staffer No.: All

Time Range: From 2005-1-24 0:00:01 To 2005-1-30 23:59:59

Search Report Export Modify Log

Department	Staffer No.	Name	Date Time	State	Location ID
RecordCount: 0					

Inquiry of attendance record

Select the department, staff, the beginning and ending time that need to inquire about, then click search, you can get the corresponding attendance record.

Attendance record report form preview

Click **Report** when the window displays the attendance inquiry records, you can get the report form automatically.

5.4.5 Attendance Calculating and Report

If need to lead out the attendance record, only need to click export, you can lead out the data inquired. (File format: txt, xls)

Click **Modify Log** and the log-modifying window will be called for reviewing the modification log of time and attendance records.

Attendance statistical report forms

Inquiry of report form:

Click **Calculating and report** in **Attendance** menu, the following window appears:

Attendance Calculating and Report

Department: Time Range: From To 0:00:01

Staffer:

Calculate Report Export Exception

Attendance Exceptions | Shift Exceptions | Other Exceptions | **Calculated Items**

Department	Name	Staffer No.	Date	Timetable	On Duty	Off Duty	Clock In
------------	------	-------------	------	-----------	---------	----------	----------

Select the beginning, the ending date and the department and staffs that need to be calculated. Click “calculate” and the following window appears.

Attendance Calculating and Report

Department: Time Range: From To 0:00:01

Staffer:

Calculate Report Export Exception

Attendance Exceptions | Shift Exceptions | Other Exceptions | **Calculated Items**

Department	Name	Staffer No.	Date	Timetable	On Duty	Off Duty	Clock In
		180006	2005-01-25	Normal	2005-01-25 08:00	2005-01-25 16:00	
		180006	2005-01-26	Normal	2005-01-26 08:00	2005-01-26 16:00	
		180006	2005-01-27	Normal	2005-01-27 08:00	2005-01-27 16:00	
		180006	2005-01-28	Normal	2005-01-28 08:00	2005-01-28 16:00	
		180007	2005-01-24	Normal	2005-01-24 08:00	2005-01-24 16:00	
		180007	2005-01-25	Normal	2005-01-25 08:00	2005-01-25 16:00	
		180007	2005-01-26	Normal	2005-01-26 08:00	2005-01-26 16:00	
		180007	2005-01-27	Normal	2005-01-27 08:00	2005-01-27 16:00	
		180007	2005-01-28	Normal	2005-01-28 08:00	2005-01-28 16:00	
		180008	2005-01-24	Normal	2005-01-24 08:00	2005-01-24 16:00	
		180008	2005-01-25	Normal	2005-01-25 08:00	2005-01-25 16:00	
		180008	2005-01-26	Normal	2005-01-26 08:00	2005-01-26 16:00	
		180008	2005-01-27	Normal	2005-01-27 08:00	2005-01-27 16:00	
		180008	2005-01-28	Normal	2005-01-28 08:00	2005-01-28 16:00	
		180009	2005-01-24	Normal	2005-01-24 08:00	2005-01-24 16:00	
		180009	2005-01-25	Normal	2005-01-25 08:00	2005-01-25 16:00	
		180009	2005-01-26	Normal	2005-01-26 08:00	2005-01-26 16:00	
		180009	2005-01-27	Normal	2005-01-27 08:00	2005-01-27 16:00	
		180009	2005-01-28	Normal	2005-01-28 08:00	2005-01-28 16:00	
		180010	2005-01-24	Normal	2005-01-24 08:00	2005-01-24 16:00	
		180010	2005-01-25	Normal	2005-01-25 08:00	2005-01-25 16:00	
		180010	2005-01-26	Normal	2005-01-26 08:00	2005-01-26 16:00	
		180010	2005-01-27	Normal	2005-01-27 08:00	2005-01-27 16:00	
		180010	2005-01-28	Normal	2005-01-28 08:00	2005-01-28 16:00	

There are four Tabs of information after search and calculation which can be viewed respectively:

【Attendance Exceptions】:Display the dealt result of the original attendance records;

【Shift Exceptions】 Display Staff's attendance result in the scheduled time period;

【Other Exceptions】 Display Staff's leave, out and overtime etc.;


【Calculated Items】 Display all Staff's calculated items such as “normal”, “actual”, “late”, “early”, “absent”, “overtime” etc.

Please note: When dealing with “Out” calculation, there should be “Out back” and only “Out” and “Out back” in one shift can be calculated.

Working hours in the report=“Actual”-“Late”-“Early”-“Out”

Exceptions of attendance records dealt with:

Open the attendance exceptions option card to deal with the records:

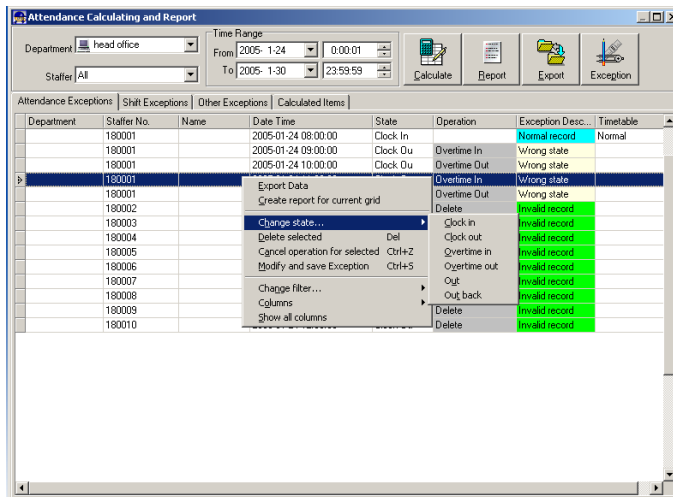

We will see such mistakes as “state mistake “, “invalid record”, “repeated record”, etc. are described. (If we will revise to write down, click the right key and springs the following menu):

Date Time	State	Operation	Exception Desc...
2005-01-24 08:00:00	Clock In		Normal record
2005-01-24 09:00:00	Clock Ou	Overtime In	Wrong state
2005-01-24 10:00:00	Clock Ou	Overtime Out	Wrong state
		Overtime In	Wrong state
		Overtime Out	Wrong state
		Delete	Invalid record
		Clock in	Invalid record
		Clock out	Invalid record
		Overtime in	Invalid record
		Overtime out	Invalid record
		Out	Invalid record
		Out back	Invalid record
		Delete	Invalid record
		Delete	Invalid record

The definition of each option as follows:

【Export Data】:Export the data in the current attendance record list to a file in txt or xls format;

【Create report for current grid】:Generate report based on the data in the current

attendance record list for preview and print;

【Change state】:Change the selected attendance record to a new state. Manually deal with the attendance record according to the practical situation;

【Delete selected】: mark the record as manual deleting, deleting when save it;

【Cancel operation for selected】:Cancel revision to this record;

【Deal with and save】:You can save the records that have been treated. If you want to see the changed records, you can click **【modified record log】** in system menu;


【Filter the record】:If there are too many records, you can filter them, and keep down the corresponding record you want;

【Columns】:Define the fields displayed. Meanwhile, the modification will take effect and be saved;

【Show all columns】:Display all fields in **【Columns】** ;

Please note: We can manually modify the record as stated above to assure the veracity of the report according to the practical situation. If there is disoperation, the records can be recovered through **【Modified Record Log】** in **【System】** .


Right Click in **【Shift Exceptions】** , **【Other Exceptions】** , **【Calculated Items】** the following shortcut menu will pop up:

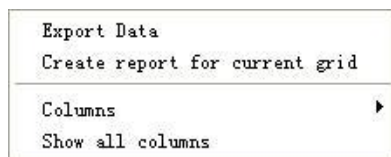

The operation is the same as stated above.

Report:

Click **【Report】** and the following menu will pop up:



Picture D

【Attendance Report】:Calculate staff's attendance record;

【Daily Report】:Calculate staff's daily attendance record;

【General Report】:Calculate all staff's attendance items such as “normal”, “actual”, “late”, “early”, “absent”, “overtime” etc;

【Exceptions Report】 :Calculate staff's “out”, “overtime”, business leave/personal leave” etc;

【Create a Report For Current Grid】 :Print preview of the current displayed grid.

See reports respectively:

预览

100%

head office attendance record report

2005-01-24 To 2005-01-30

180001	Count: 4
2005-01-24 08:00:00	Clock In
2005-01-24 09:00:00	Clock Ou
2005-01-24 10:00:00	Clock Ou
2005-01-24 11:00:00	Clock Ou
2005-01-24 12:00:00	Clock Ou
2005-01-24 13:00:00	Overtime
2005-01-24 15:00:00	Clock Ou
2005-01-24 16:00:00	Clock Ou
Count: 8	
180002	Count: 3
2005-01-24 12:00:00	Clock Ou
2005-01-24 13:00:00	Clock Ou
2005-01-24 15:00:00	Clock Ou
2005-01-24 16:00:00	Clock Ou
Count: 4	
180003	Count: 4
2005-01-24 12:00:00	Clock Ou
2005-01-24 13:00:00	Clock Ou
Count: 4	
180008	Count: 4
2005-01-24 12:00:00	Clock Ou
2005-01-24 13:00:00	Clock Ou
2005-01-24 15:00:00	Clock Ou
2005-01-24 16:00:00	Clock Ou
Count: 4	
180009	Count: 3
2005-01-24 12:00:00	Clock Ou
2005-01-24 13:00:00	Clock Ou
2005-01-24 15:00:00	Clock Ou
Count: 3	
180010	Count: 4
2005-01-24 12:00:00	Clock Ou
2005-01-24 13:00:00	Clock Ou
2005-01-24 15:00:00	Clock Ou
2005-01-24 16:00:00	Clock Ou
Count: 4	

页 1/1

预览

100%

Denis International attendance stat. total report

2005-02-01 To 2005-03-10

Name	Staffer No.	Duty Day	Actual Day	Absent Day	Late Minute	Early Minute	OT Hour	Free OT Minute	Out Hour	BL Day	Leave Hour	N/In Times	N/Out Times	WTime Hour	AttRate %
Development															
Youwen	1002	24		24											0%
Xush	1011	28		28											0%
Wanch	1014	28	1	27	15									7.7	4%
Yanhu	1016	10		10											0%
Xiaoqi	1018	10		10											0%
Xiasan	1019	10		10											0%
Subtotal:	6	110	1	109	15									7.7	1%
Total:	6	110	1	109	15									7.7	1%

页 1/1

预览

100%

Denis International attendance exceptions report

2005-02-01 To 2005-03-10

Name	No.	Date & Time	Exception type	Work long	Remark
Development					
Wanch	1014	2005-02-01 09:29	2005-02-01 11:34:59	Free overtime	03:25:30
Wanch	1014	2005-02-01 12:55:32	2005-02-01 16:43:13	Free overtime	04:37:41

页 1/1

Other Report:

预览

100%


head office exceptions of attendance record report

Department	Staffer No.	Name	Date Time	State	Operation	Exception Description	Timetable
	180001		2005-01-24 08:00:00	Clock In		Normal record	Normal
	180001		2005-01-24 09:00:00	Clock Ou	Overtime In	Wrong state	
	180001		2005-01-24 10:00:00	Clock Ou	Overtime Out	Wrong state	
	180001		2005-01-24 11:00:00	Clock Ou	Overtime In	Wrong state	
	180001		2005-01-24 12:00:00	Clock Ou	Overtime Out	Wrong state	
	180001		2005-01-24 13:00:00	Overtime	Overtime In	Wrong state	
	180001		2005-01-24 15:00:00	Clock Ou	Overtime Out	Wrong state	
	180001		2005-01-24 16:00:00	Clock Ou		Normal record	Normal
	180002		2005-01-24 12:00:00	Clock Ou	Overtime In	Wrong state	
	180002		2005-01-24 13:00:00	Clock Ou	Overtime Out	Wrong state	
	180002		2005-01-24 15:00:00	Clock Ou	Delete	Invalid record	
	180002		2005-01-24 16:00:00	Clock Ou		Normal record	Normal
	180003		2005-01-24 12:00:00	Clock Ou	Overtime In	Wrong state	
	180003		2005-01-24 13:00:00	Clock Ou	Overtime Out	Wrong state	
	180003		2005-01-24 15:00:00	Clock Ou	Delete	Invalid record	
	180003		2005-01-24 16:00:00	Clock Ou		Normal record	Normal
	180004		2005-01-24 12:00:00	Clock Ou	Overtime In	Wrong state	
	180004		2005-01-24 13:00:00	Clock Ou	Overtime Out	Wrong state	
	180004		2005-01-24 15:00:00	Clock Ou	Delete	Invalid record	
	180004		2005-01-24 16:00:00	Clock Ou		Normal record	Normal
	180005		2005-01-24 12:00:00	Clock Ou	Overtime In	Wrong state	
	180005		2005-01-24 13:00:00	Clock Ou	Overtime Out	Wrong state	
	180005		2005-01-24 15:00:00	Clock Ou	Delete	Invalid record	

页 1/2

Print Report:

Toolbar of report preview is as the following picture:



Adjust the ratio of preview content;



Open the existing report file;

Find the report file (*.frp) to be opened, select it and click **Open** to see the report.



Save report to file;

Select the directory to save the report to, enter the file name and click **【Save】** to complete the backup of the report for future check or copying to another computer for printing; extension file name is “*.frp”.



Print Report;



Close Preview

Data Export:

In picture D on page 62, click **【Export】** and the displayed data of grid in the current window will be exported to a file (*.txt or *.xls). It has the same function as **【Export Data】** when right clicking in each grid.

Exceptions dealt with:


In picture D on page 62, click **【Exception】** and the following menu will pop up:



Click options one by one in the menu and the following modules will pop up respectively: **【Append record】**, **【Late/Early Collectively】**, **【Business Leave/leave】** and **【Modified Record Log】**. If the calculation result is incorrect for some staff, first, please check whether there is leave or forgetting Clock in or Clock out for this staff. If there is, please deal with the records through above menu. Please refer to the next chapter for more details.

5.5 Deal with exceptions

Click **【Exception】** on the main menu, following springs:

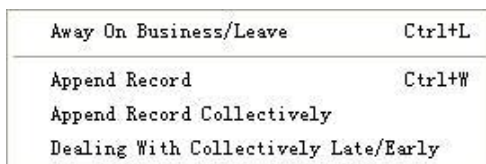

5.5.1 Away on Business/ Leave

When the staff can't punch in/out because of going out on business or asking for leave, in order to guarantee the exactness of the final statistics, we should make these settings through this function. Click **away on business/leave** in **exception** menu, the following interface springs:

Department	Staffer No.	Name	Beginning Time	Ending Time	Leave Type	Reason
------------	-------------	------	----------------	-------------	------------	--------

Deal with staff away on business / leave:

Click **append** , then select the proper department, staffer ID, beginning time, ending time, leave type, and click save when ready.

Modification of staff away on business or leave:


Select the appointed staffer whom you want to make this modification to, and click **modify** . Then you can modify the relative information, click **save** when ready.

Deletion of staff away on business or leave

Select the appointed staff and the relative information you want to make this deletion, and click **delete** .

5.5.2 Append Record

If a staffer didn't punch in because of special reason, you can use this function to append the forgetting attendance record. Click **append record** in **exception** menu, the following window Springs:

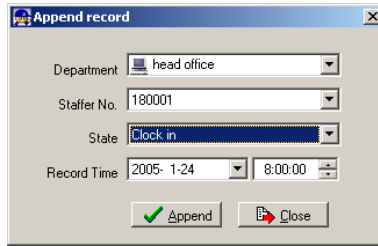


The 'Append record' dialog box contains the following fields:

- Department: head office
- Staffer No.: 180001
- State: Clock in
- Record Time: 2005-1-24 8:00:00
- Buttons: Append, Close

Select the relative items and click **Append** when ready.

5.5.3 Append Record collectively

When part or all of the staffers in a department did not punch in/out because of some reasons, please you can use this function to add punching in/out collectively, click **Exception** -- **Punching in/out collectively** , following springs:

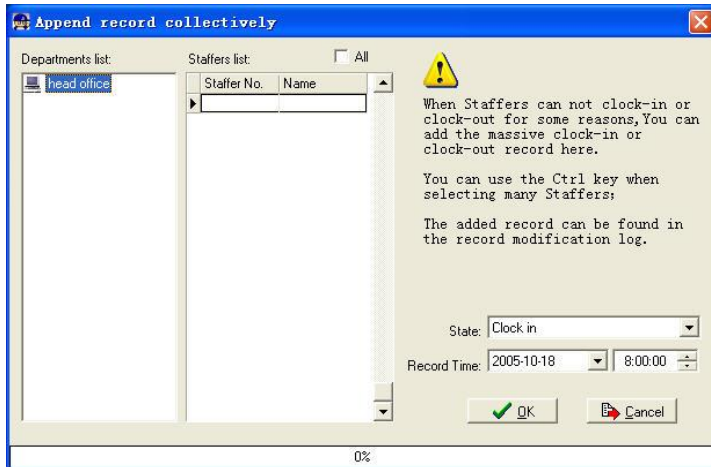

The 'Append record collectively' dialog box includes:

- Departments list: head office
- Staffers list: (empty table with headers Staffer No. and Name)
- Buttons: All, OK, Cancel
- Text: When Staffers can not clock-in or clock-out for some reasons, You can add the massive clock-in or clock-out record here. You can use the Ctrl key when selecting many Staffers; The added record can be found in the record modification log.
- State: Clock in
- Record Time: 2005-10-18 8:00:00
- Progress bar: 0%

Select the department, thus the staffers in the department will be listed in the staffer list, select the staffers whom you want to add records on to, then select punching in or out and the time, click **ok** to finish.

5.5.4 Dealing with collectively late / early

When collectively coming late / leaving early takes place for some allowable reasons, you can use this function. Click **append record collectively** in exception menu. The following springs:

Deal with:
☒ Coming Late ☐ Leaving Early

Ignore clock in record
 From: 2005- 1-24 8:00:00
 To: 2005- 1-24 10:00:00

The modified clock in time
 2005- 1-24 7:50:00

Search Staffers
☒ Department: head office
☐ Shift: Normal

Staffer No.	Name
180001	
180002	
180003	
180004	
180005	
180006	
180007	
180008	
180009	
180010	

OK Cancel

0%

Steps as follows;

1. Click “Dealing with Collectively Late/Early”;
2. Select time range for “ignore clock in record”;
3. Select the “modified clock in time”
4. Search staff through department or shift;
5. Select staff;
6. Click **【OK】** to confirm.


5.6 Data maintenance

Click **【data maintenance】** on the main menu, following springs:


Import Staffer List Ctrl+Y
 Import Attendance Record Ctrl+I
 Clear Obsolete Data
 Compress Database
 Backup DataBase
 Initialize System

5.6.1 Import Staffer List

Click **【import staffer list】** in **【data maintenance】** menu. Pop up the following window:

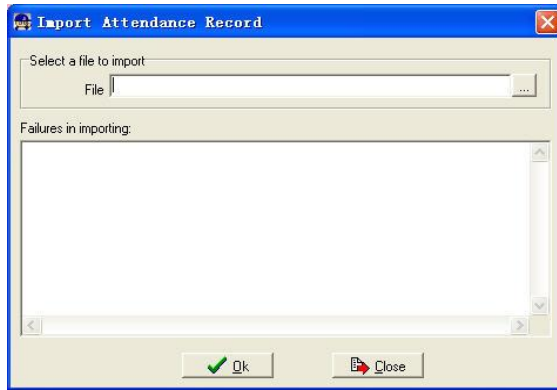

Click  to select the personnel list file for importing.

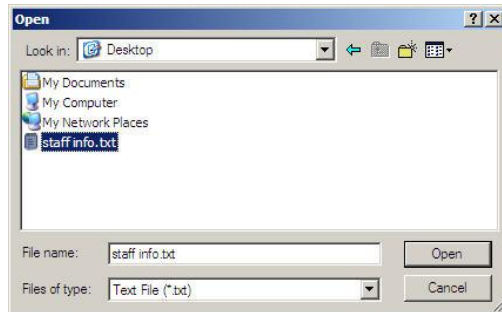

Select the right file which can be in *.txt or MS Excel (*.xls) formats, then click **[open]** to get back to above window, click **[ok]** to start!

The definition of (*.txt) data format as follows:

This format of file only can import the staffer info of "ID, Name and Department";

The format of data must follow: Staffer ID + Tab + Name + Tab + Department;


The information of each staffer takes one line, no blank line between one another.

See following:



The definition of MS Excel (*.xls) data format as follows:

This format of file can import the staffer info includes: "ID, Name, Department, card, position, employ date, telephone, address, sex, nation, birthday, native place, ID card, mobile, education, SIN, specialty"; put those items on the head line and input the items by order, the order cannot be changed.

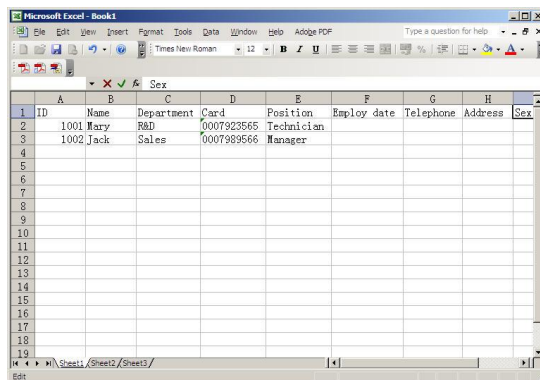

	A	B	C	D	E	F	G	H	
1	ID	Name	Department	Card	Position	Employ date	Telephone	Address	Sex
2	1001	Mary	R&D	0007923565	Technician				
3	1002	Jack	Sales	0007989566	Manager				
4									
5									
6									
7									
8									
9									
10									
11									
12									
13									
14									
15									
16									
17									
18									
19									

5.6.2 Import Attendance Records

Click **import attendance record** in **data maintenance** menu, Springs the following window:



Import Attendance Record

Select a file to import:


File ...

Failures in importing:

Click  to select the attendance record file for importing, and click **ok** to start.

5.6.3 Clear Obsolete Data

Click **clear obsolete data** in **data maintenance** menu, springs the following window:

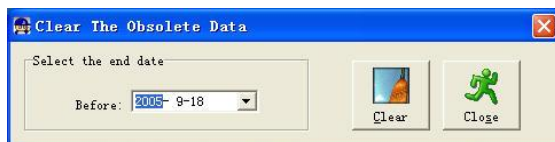

After your system is used for a long time, you will get a large number of obsolete data in the database. It ties up the hard disk space and influences your system operation speed. At this moment you can use this function to clear these useless data.

Select the ending date for your data clearing. And click **【clear】** to complete this operation, after the clearance, the system will prompt asking you to compress the database as following shows, select **【ok】** to finish. (Note: you can only clear the data of one month ago)

5.6.4 Compress Database

Click **【compress database】** in **【data maintenance】** menu to compress and repair the database

5.6.5 Backup Database

For ensuring the safety of data and recoverability, we advise you to back up the database regularly. Click **【backup database】** in **【data maintenance】** menu, then select the route to backup the database. Click **【save】** when ready.


Back up the database manually: Copy the Att2003.mdb from the installation directory to the route you want to backup the database, so if the system collapses, you just copy Att2003.mdb to installation directory over again after re-installation.

5.6.6 Initialize System

Click **【Initialize system】** in **【data maintenance】** to initialize the system. (Note: After the system is initialized, all information will be lost; the system will get back to the state when just installed. Please make sure that you want to initialize the system.)


5.7 External program management

Click External on the main menu, following springs:



5.7.1 External program Management

We can append external program into time attendance program for convenient operation, for example, we need “calculator” when we are operating, we can click **【External】** -- **【External program management】** , following springs:

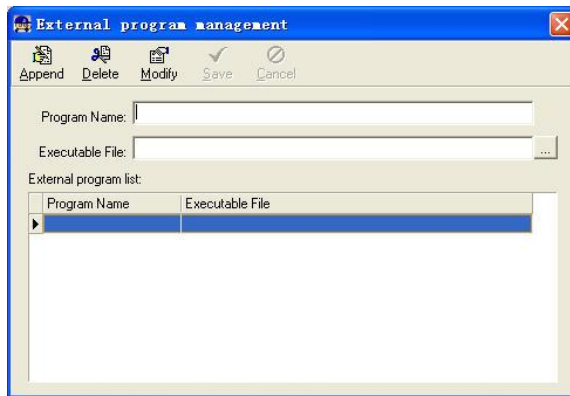

Click **Append** , Input “calculator” into the input field of **Program name** , input “c:\winnt\System32\calc.exe ” into the input field of Executable file or browse  to find the calculator program, click **Save** to finish.

You will see **Calculator program** when you open **External program management** over again.

5.7.2 Connect To Time and Attendance Machine

Click **External** -- **Connect to time attendance machine** springs the communication interface between the software and the machine which can control the current machine connected with the computer, it can collect the records from the machine, upload and download staffer info & clear the old data & modify the time on the machine. Find detail on clause 《Time and attendance management & communication》 .

Chapter 6

FAQ

Frequently asked questions and answers



6 FAQ

6.1 My fingerprint has been enrolled but often failure in identification.

Reason	Solution
1. The fingerprint was not captured properly	Enroll the finger again. Please refer to illustration of pressing finger.
2. Direct sun light or too bright light	Avoid direct sun light or other bright light
3. Too dry finger	Touch the forehead to increase oily level of the finger.
4. Too wet finger with oil or cosmetics	Clean fingers with towel
5. Low fingerprint quality with callus or peeling	Enroll other fingers with better quality
6. Wrong way in placing fingers when punching in/out	Please refer to illustration of pressing finger.
7. Latent fingerprint on the surface of sensor	Clean sensor surface (adhesive tapes recommended)
8. Not enough finger pressure	Place the finger evenly on the sensor with moderate pressure
9. Influence by fingerprint image change	Enroll fingerprint again. Please refer to illustration of pressing finger.
10. Fingerprint not enrolled yet	Place enrolled finger.

6.2 T&A system can't be connected with PC

Reason	Solution
1. Communication method not set correctly	Select the correct communication method
2. Cable not plugged firmly or cable hardware problem	Plug the cable firmly or change another cable
3. Not able to connect COM (wrong CON No)	Please enter the right COM No
4. Not able to connect Net (wrong setting)	Please refer to TCP/IP Set. Connecting Time Attendance terminal

6.3 No records found though staff have clocked in/out

Reason	Solution
1. 1. Unit power break for a long time (time turn to zero as default)	Please refer to the manual for time synchronization
2.Minority staff fingerprint false accepted	1、 Please refer to the manual. You can add the records manually. 2、 Please refer to the manual. You can adjust the fingerprint matching

	precision. 3、Enroll another fingerprint. And then try again.
--	---

6.4 The user can not identify

Reason	Solution
1、 In the sleeping mode	Press any key one the keypad
2、 The device is communicating or communication interruption	1.Disconnect the connection 2.Resolve the wire interruption
3 、 Fingerprint sensor control board abnormal	1. Restart the OA280

6.5 The staffer can't pass although he has already used the User ID+FP mode

Reason	Solution
1、 Enter wrong User ID	Enter the correct User ID
2、 This user do not have the 1:1 identification privilege	Set the 1:1 identification privilege

6.6 The unit beeps automatically when no one punches in/out

Reason	Solution
1. Direct sun light or too bright light	Avoid direct sun light or other bright light
2. Latent fingerprint on the surface of sensor	Clean sensor surface (adhesive tapes recommended)

Notice: If you have any other problems, please kindly email us the log files in Zip or Rar (The log files are in the folder “Log” in the installation directory of the software)!

Chapter 7


Appendix

The main theme of this chapter is the additional information of this T & A including access control cable connection and way of pressing finger.




7 Appendix

7.1 Communication and Power

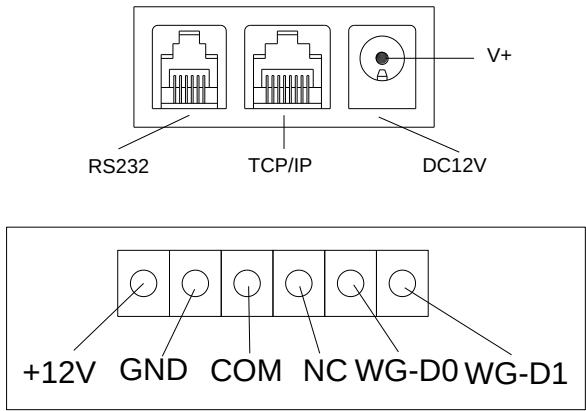


+12V	12V Input
GND	Ground
COM	Dry contact signal public connector
NC	Dry contact signal (normal close)
WG-D0	Wiegand signal D0 terminal
WG-D1	Wiegand signal D1 terminal


Electrical Source connection diagram:

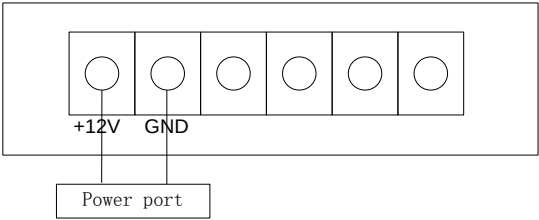

Wiegand output connection diagram:

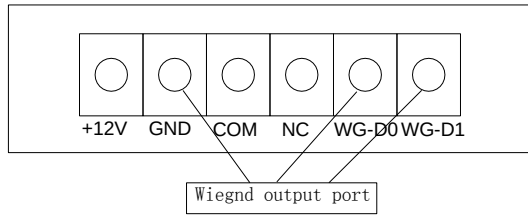

Relay output connection diagram:

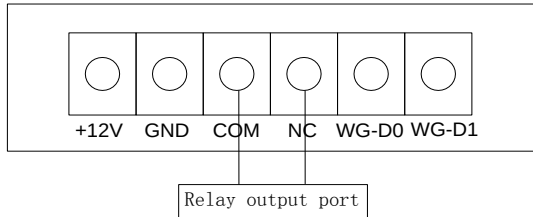

7.2 Illustration of pressing finger

Correct pressing finger method:



Wrong pressing finger method:



1. Please register and punch by thumb or index finger if possible
2. Press any key to activate the sleeping unit
3. Please stand in a line and don't punch with finger not registered.
4. Please avoid direct sunlight, water, collision and use in extreme environment.