


Appendix:

Access control system is established by T5 and SC021

Installation makes the cable connection according to the following connection

Diagram:

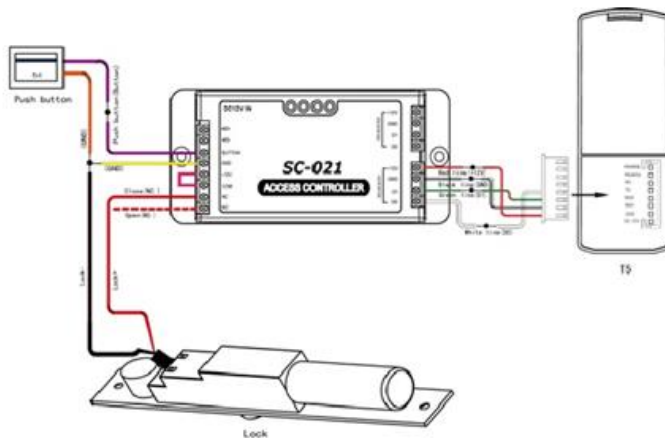

Authorization:

1. Power off the SC021.
2. Keep pressing the exit button. (please do not stop pressing the exit Button until the step5) And power on the SC021
3. Please try to send the Anviz Wiegand single to the SC021 by swiping Registered card on the reader or placing the registered fingerprint on the reader's Scanner window after hearing 11 short beeps from the SC021.
4. The SC021 will generate a long deep and its green led will flash if the SC021 receives the Anviz Wiegand single successfully.
5. Stop pressing the exit button. And then power off and power on the SC021.
6. That's all.

Notice:

- 1) One SC021 can connect two T5.
- 2) The T5 reader's GND and the SC021's GND must be same
- 3) The reader's Wiegand output must be set as encrypted Wiegand(Anviz Wiegand)
- 4) You only need to make the authorization operation one time.
- 5) The current from the power supply must be higher than SC021 (0.5) + Reader current + reader2 current + electrical lock current