

T50-W-C

BayLan Compact Timezone Fingerprint Time Attendance & Access Control Reader



Waterproof Cover

BayLan T60 is professional fingerprint access control system which fully integrates LCD keypad, optical fingerprint sensor, card reader and professional access control components. The very compact design makes it suitable for installation on door frame. T60 can be used for both simple access control and separate type secure access control. In addition, T60 has Wiegand input, alarm output and door bell output for a complete access control solution. Mini USB, RS485 and TCP/IP communication is available for all kinds of installation sites. With ID, optional Mifare and HID card reader is specially designed for the existing card users and higher security level. T60 can work perfectly to meet different demand for access control.

FEATURES

- World leading brand. Simplicity-led design
- Optical fingerprint reader, scratch-proof, unbreakable and durable. Well accept all kind of fingerprints
- Stylish blue LCD. Musical buzzer
- Stand-alone without being connected with computer. Standard 512 fingerprints
- Standard 30000 records
- Multiple identification method: fingerprint only, ID + password, ID + fingerprint
- Standard RS 485, wiegand 26 output, dry contact output, TCP/IP network interface
- Optional BayLan SC021 or SC822 access controller for separate type secure access control
- Waterproof cover for outdoor use. Door bell button for direct connection with door bell
- Wall mounted. Combined 2-in-1 function for both time attendance and access control


Specifications are subject to change without prior notice with advancement in technology.

PARAMETER

Sensor	Optical sensor
LCD	Blue LCD
Identification Method	FP, ID+FP, ID+PW
Identification Time	<1 second
Register Method	FP, PW
Fingerprint Capacity	512/1000 (optional)
Record Capacity	30000
FRR	0.001%
FAR	0.00001%
Standard Port	RS485, Wiegand, dry contact output
Optional Port	TCP/IP

Working Current	<130mA
Sleeping Current	<20uA
ESD Tolerance	>15000V
Power	DC12V
Temperature/ Humidity	-10°C-60°C / 20%-80%
Size	74(w)*144(h)* 40(d)mm
Color	Black (customizable)
Scan Area	22mm*18mm
Resolution	500DPI
Casing material	ABS industrial plastic

Appearance drawing

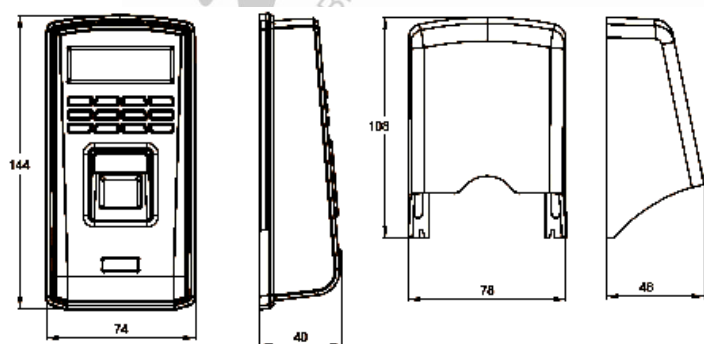


Front View

Side

Front View of
Waterproof
cover

Side View of
Waterproof
cover

Network topology illustration

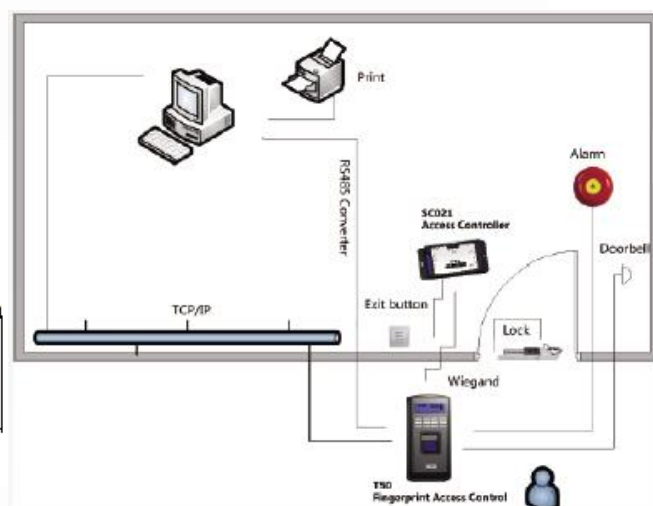

Single door separate type access control
Solution

Specifications are subject to change without prior notice with advancement in technology.