



**HCRCW333**  
**RFID Card (HID Compatible)**  
**RF Programmable 125Khz**



**FEATURES**

- Offers universal compatibility with all HID proximity readers.
- Provides an external number for easy identification and control.
- Supports formats up to 85 bits, with over 137 billion codes.
- Meets ISO standards for thickness; use with all direct image or Thermal Transfer printers.

**APPLICATION**

The RF-programmable proximity access card offers proximity technology and photo identification on a single access control card.


<b>Proven, Reliable Technology</b>	Offers extremely consistent read range. Unaffected by body shielding or variable environmental conditions, even when close to keys and coins.
<b>Thin</b>	Can be carried with credit cards in a wallet or purse. Use with a strap and clip as a photo ID badge.
<b>Photo ID Compatible</b>	Print directly to the card with a direct image or Thermal Transfer printer. Slot punch vertically or horizontally for easy use.
<b>Cross-reference</b>	A cross-reference list correlating the external card number and the programmed ID number is provided for easy system administration.
<b>Security</b>	Offers over 137 billion unique codes.
<b>Long Life</b>	Passive, no-battery design allows for an infinite number of reads.
<b>Durability</b>	Strong, flexible and resistant to cracking and breaking.

Specifications are subject to change without prior notice with advancement in technology.



## SPECIFICATION

<b>Dimensions</b>	2.125" x 3.370" x 0.030" $\pm$ 0.003" nominal (5.4 x 8.6 x 0.076 $\pm$ 0.0076 cm)
<b>Card Construction</b>	Thin, flexible polyvinyl chloride (PVC) laminate.
<b>Operating Temperature</b>	-50° to 160° F (-45° to 70° C)
<b>Weight</b>	0.24 oz. (6.8 g)
<b>Description</b>	RF-programmable, 125 kHz, customer-specified ID numbers, locations marked for horizontal and vertical slot punch

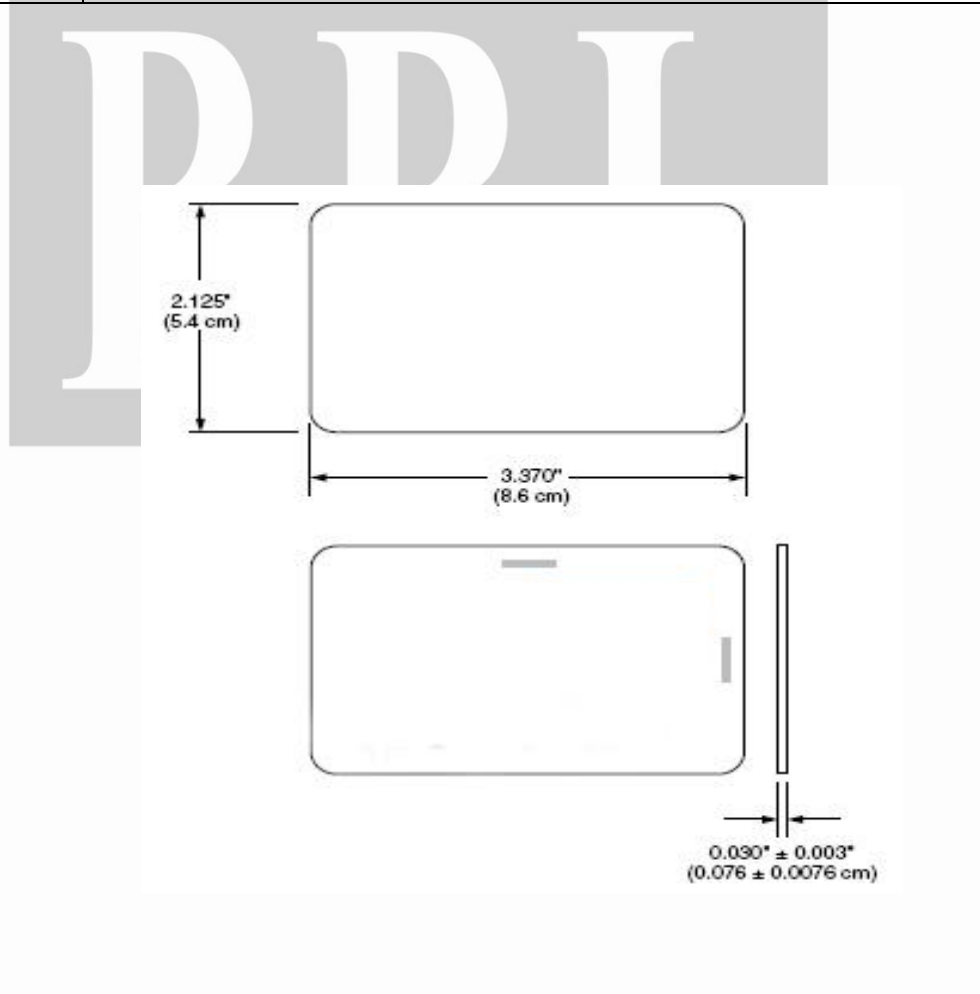

Specifications are subject to change without prior notice with advancement in technology.