

## FAN for Switch / Communication Rack

### FEATURES :

- Housing : Die-Cast Aluminum Painted
- Blade: Plastic P.B.T
- Insulation Resistance: 10MΩ at 500VDC between lead and frame
- Dielectric Strength: 1 min at 1500VAC/50-60HZ, Current < 5mA
- Operation Temperature: -10°C - 60°C
- Operation Humidity: 20% - 85%
- Working Voltage: 190V – 250V for 220V




### BL12038A2HB FAN (Ball Bearing)

- Dimensions: 120 x 120 x 38mm
- Bearing: Ball
- Current : 0.10 – 0.14 AMP
- Rated : 24 – 27 Watts
- Max Air: 77/92 CFM
- Speed: 2650RPM
- Max Pressure: 6.6/7.5 mmH2O
- Noise: 45/47 dBA
- Life at 25°C: 60000hr

### BL12038A2HS FAN (Sleeve Bearing)

- Dimensions: 120 x 120 x 38mm
- Bearing: Sleeve
- Current : 0.07 – 0.80 AMP
- Rated : 24 – 27 Watts
- Max Air: 75/90 CFM
- Speed: 2600RPM
- Max Pressure: 6.3/7.3 mmH2O
- Noise: 45/46 dBA
- Life at 25°C: 30000hr

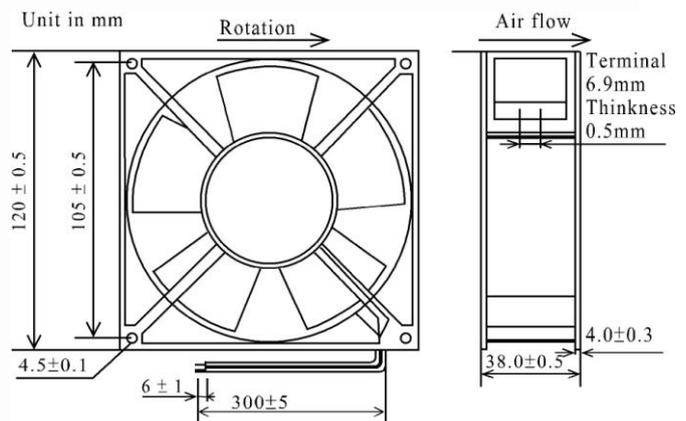

Specifications are subject to change without prior notice with advancement in technology.