


GP310K

BayLan High Speed Thermal Receipt Printer (Kiosk)

Serial+USB Interface

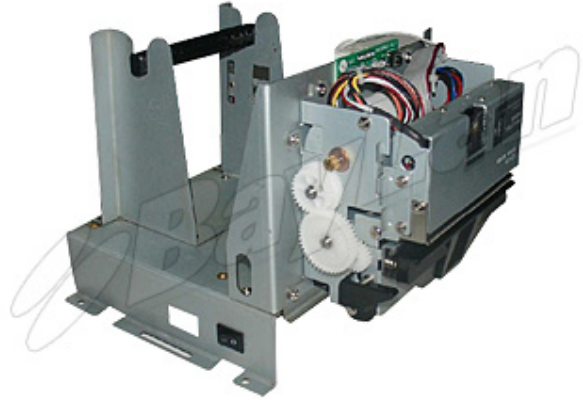

FEATURES

- Print speed: 250mm/sec. (max.)
- Epson ESC/POS and Star commands Compatible
- Open Structure with easy maintenance design
- Two sensors in paper feeding path
- 90° and 180° paper feeding direction
- Semi-automatic paper loading design
- Two feed buttons: paper forward feeding and backward feeding
- Paper width 83mm,80mm,76mm,70mm,58mm optional
- Multiple Language Fonts selectable
- Optional audible indicator version good for noisy environment operation
- Auto Cutter life 1,500,000 times, Mechanism life 150km
- Various installation position

Specifications are subject to change without prior notice with advancement in technology.

SPECIFICATIONS

Print Method	Direct Thermal Line
Paper Width	79.5mm ± 0.5mm (Print width 80mm)
Dot Density	640dot/line
Columns	Font A: 42 columns or 48 columns Font B: 56 columns or 64 columns Simplified/Traditional: 21 columns or 24 columns
Print Speed	300mm/sec. (max)
Interface	Serial+USB (Virtual COM), Ethernet (Optional)
Paper Diameter	254mm
Line Space	3.75mm(can be adjusted by sending commands)
Characters	ANK Font A: 12x24dots / Font B: 9x17dots Simplified/Traditional: 21 columns or 24 columns
Code Page	PC437 / Katakana / PC850 / PC860 / PC865 /West Europe/ Greek / Hebrew / East Europe /Iran /WPC1252 / PC866 / PC852 / PC858 / IranII / Latvian / Arabic / PT151,1251 / PC737 / WPC1257 / Thai Vietnam / PC864 / PC1001 / (Latvian) / (PC1001) / (PT151,1251) / (WPC1257) / (PC864) / (Vietnam) / (Thai)
Barcode Type	UPC-A / UPC-E / JAN13 (EAN13) / JAN8 (EAN8) CODABAR / ITF / CODE39 / CODE93 / CODE128
Printing Chinese Characters	Traditional (complex font) Chinese: simplified Chinese 24x24 point, support 18030 font library, Support Taiwan and HK
Buffer Data	12K bytes
NV Flash	64K bytes
Power Supply	Input: AC 100-240V Output: DC 24V 2.5A 60W (Built-in power adapter)
Auto-Cutter	Full or Partial
Mechanism	150KM
Environment	Operating : 0°C ~ 45°C , 10%RH ~ 80% RH Storage : -10°C ~ 60°C , 10%RH ~ 90% RH
Dimensions (mm)	121.4(L) x 88.5(W) x 57.5(H)
Weight	0.65KG

Specifications are subject to change without prior notice with advancement in technology.