


Barcode Readers

BCR250MB

BCR250MF

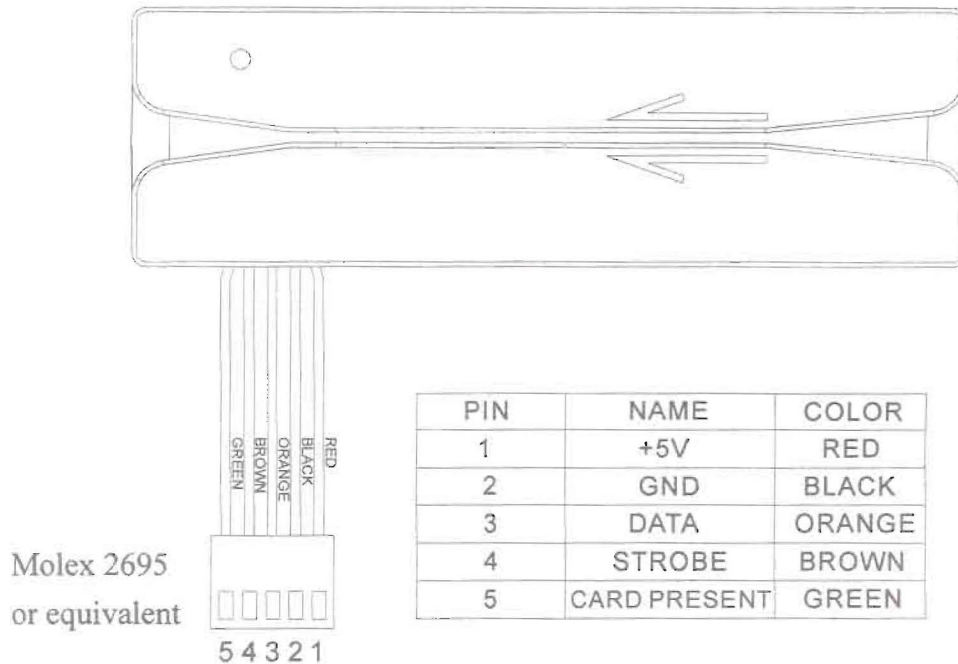

Barcode (numerical characters only)

Code 39 , I25 , EAN13 , EAN8 , UPCE , UPCA , CODE 128 ,
CODABAR , CODE 93 , CODE 11

ABA INTERFACE :

Mag-stripe ABA TK2 emulation interface

Power Supply :

DC 4.5V ~ 5.5V , 300mA

Dimensions :

D 33 * W 99 * H 31 mm

Environment :

Operating Temp : 0~55 Deg . C

Storage Temp : -10~55 Deg . C

Humidity : 10 ~ 90 % relative

Mounting : Use Velcro fastener or M3*5 screws

Any surface