


USER'S MANUAL

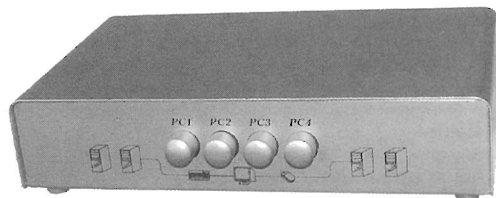

Part No	Description	Case design	Support			Connector		Dimension L X W X H(mm)
			Monitor	K/B	Mouse	PC Side	Console side	
MPC 321	2PC to 1 User(PS/2)	desk-top	V	V	V	MD-6F X 4 HD-15M X 2	MD-6F X 2 HD-15F X 1	152 X 130 X 65
MPC 341	4PC to 1 User(PS/2)	desk-top	V	V	V	MD-6F X 8 HD-15M X 4	MD-6F X 2 HD-15F X 1	152 X 130 X 65
MPC 3-81PS	8PC to 1 User(PS/2)	desk-top	V	V	V	MD-6F X 16 HD-15M X 8	MD-6F X 2 HD-15F X 1	254 X 180 X 74
MPC 3-81PRS	8PC to 1 User(PS/2)	19"Rack	V	V	V	MD-6F X 16 HD-15M X 8	MD-6F X 2 HD-15F X 1	436.5X190X43

FEATURE

- 1 Push Button
2. PC board type
3. Coaxial cable for RGB
- 4 "No-cut-in-power" design, to avoid computer getting halt if losing power in electricity

INTRODUCTION

MPC-3 (Manual Multi-PC's Controller) does not provide emulation. It must be used with standard, non-proprietary keyboard and Microsoft 2 button (or 100% compatible) mouse. Correct 2 button driver must be installed in order for mouse to function.

All PC's connected by the switch must be booted up while the switch is turned to that PC. This means the first PC must be fully booted before the switch can be turned to the next PC for boot up.

The switch will not function correctly if O/S "polls" the mouse port frequently.

Pressing two switch box buttons at the same time will connect two machines and may cause damage to both.

WARNING:

Be careful not to press two buttons on the front of the switch at the same time. Doing so will connect the two computers together and could damage your equipment.

HARDWARE REQUIREMENTS

1. Mouse-A true Microsoft (or 100% Microsoft compatible) 2-button mouse is required. Do not use a 3-button or "scroll-wheel" mouse. Do not use a mouse that is "PS/2 and Serial".
2. Keyboard-Do not use an "AT" style keyboard with a "PS/2" adapter.
3. Monitor-Must be capable of displaying all "refresh rates" of the video card connected to the switchbox.
4. Operating Systems/Applications-Must have correct mouse driver installed, and must support a manual switchbox.

CUSTOMER SERVICE

Thank you for purchasing Manual Multi-PCs Controller. Please read the manual thoroughly and follow the installation procedures to prevent any damage to the product and the connecting devices.

Warranty:

- Within the 1 year warranty period: Free repair if the Product is not destroyed from the people or the disaster.
- Over the warranty period: Any cost will be charged depends on the real expense happened.
- Do not put the product in the high temperature, high voltage, and wet environment in order to assure the quality and safety.
- If you find the product any faulty or not work, please DO NOT dismantle and repair the switch by yourself. ONLY contact your supplier and tell them the serial number and the situation happened. we will deal with the matter for you soonest.

NOTE:


To make sure the quality of the product and the safety of the peripheral equipment, please TURN OFF the power of the switch and the PC first if you need to do the insert and pull out action.

DISCLAIMER:

The manufacturer and reseller of this product will not be held responsible for any equipment failure or data loss resulting from the use of this product.

APPLICATION

MPC3-8IPS

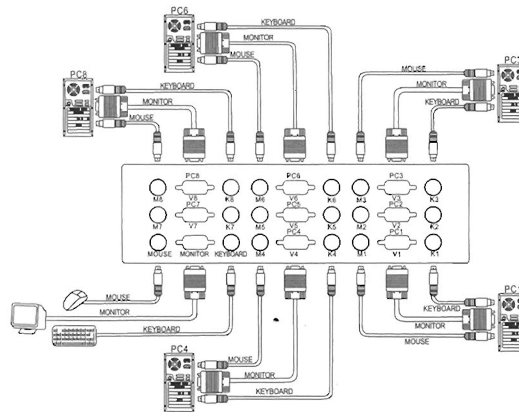

• Factory ISO 9002
Quality Management
System Approved

• Certificated
CE Products

COPY RIGHT
MANUAL PART NO.MPC-3