



LAN CONFIGURATION DRIVER


1. Please install Lan configuration program directory path is
G:\Receipt Printer\PRP_for_Win95_98_2K_XP\PRP-085\prp085_lan_config
Install setup utility.
2. After installing program open Ethernet test program. Click Ethernet test program.

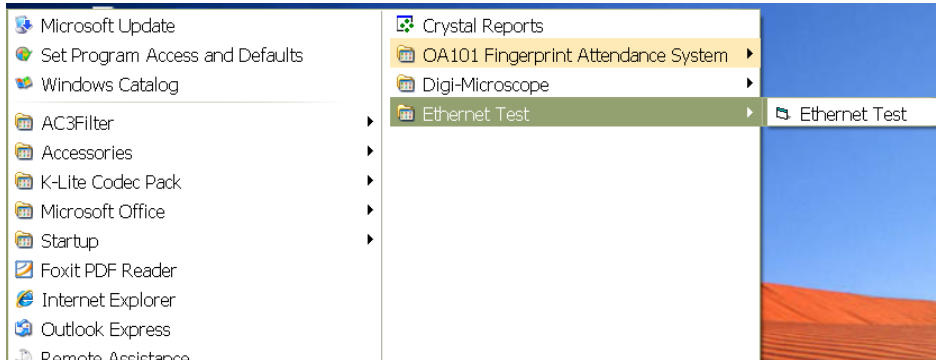


3. Please your IP Address write in printer set new IP address field then click connect test icon. After IP Address setting we can check print, cut paper and cash drawer options.

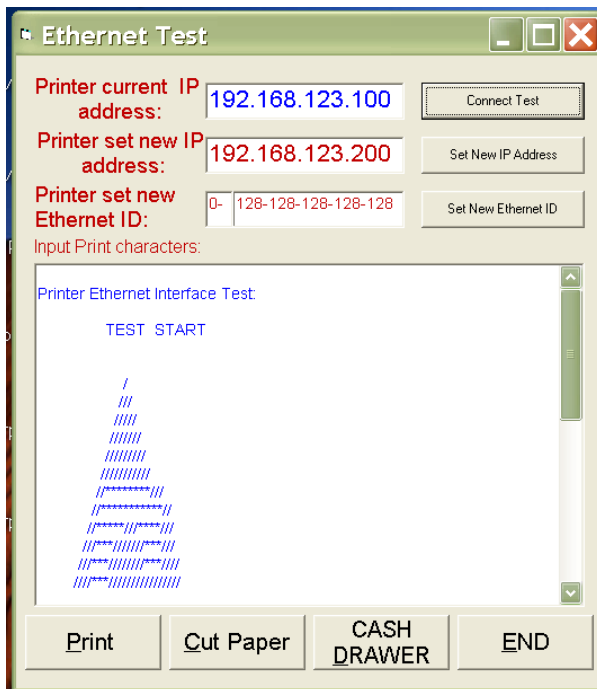

4. ADD TCP/IP STANDARD PORT IN PRINTER DRIVER
5. Right mouse click on printer driver and select properties

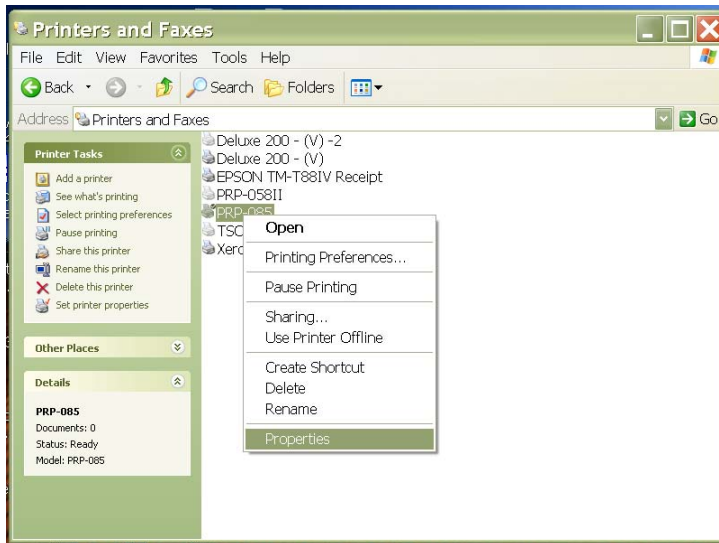

6. ADD PORT

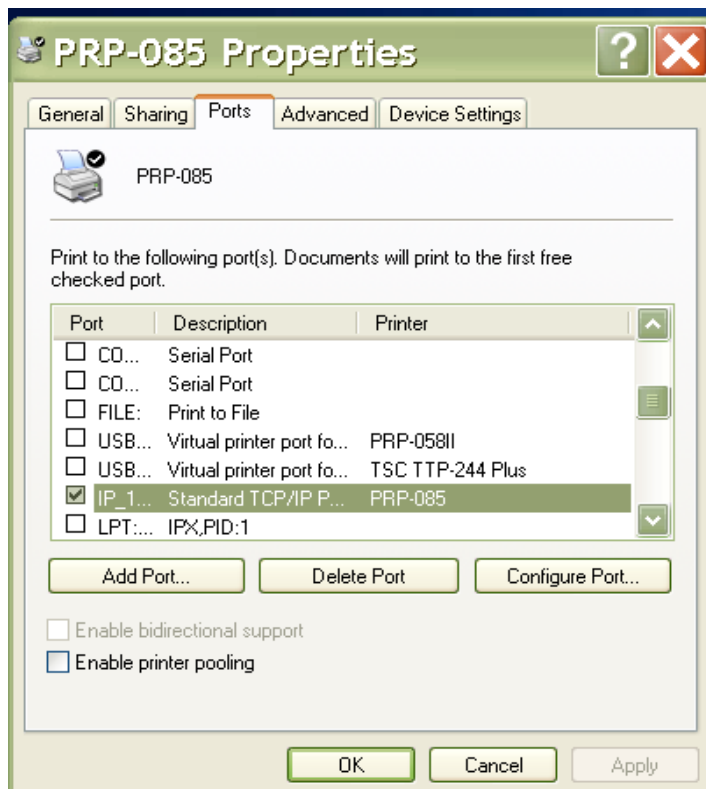

7. SELECT STANDARD TCP/IP PORT CLICK" NEW PORT"



8. CLICK NEXT



9. Type IP Address of your printer in printer name or IP Address field
And click next.



The screenshot shows the 'Add Standard TCP/IP Printer Port Wizard' window, specifically the 'Add Port' step. The title bar includes a close button (X). The main heading is 'Add Port' with a sub-instruction: 'For which device do you want to add a port?'. Below this is a printer icon. The text 'Enter the Printer Name or IP address, and a port name for the desired device.' is displayed. There are two input fields: 'Printer Name or IP Address:' containing '100.20.20.200' and 'Port Name:' containing 'IP_100.20.20.200'. At the bottom are three buttons: '< Back', 'Next >', and 'Cancel'.

Add Standard TCP/IP Printer Port Wizard

Add Port
For which device do you want to add a port?


Enter the Printer Name or IP address, and a port name for the desired device.

Printer Name or IP Address: 100.20.20.200

Port Name: IP_100.20.20.200

< Back Next > Cancel

10. Please select Custom option in device type then click next.

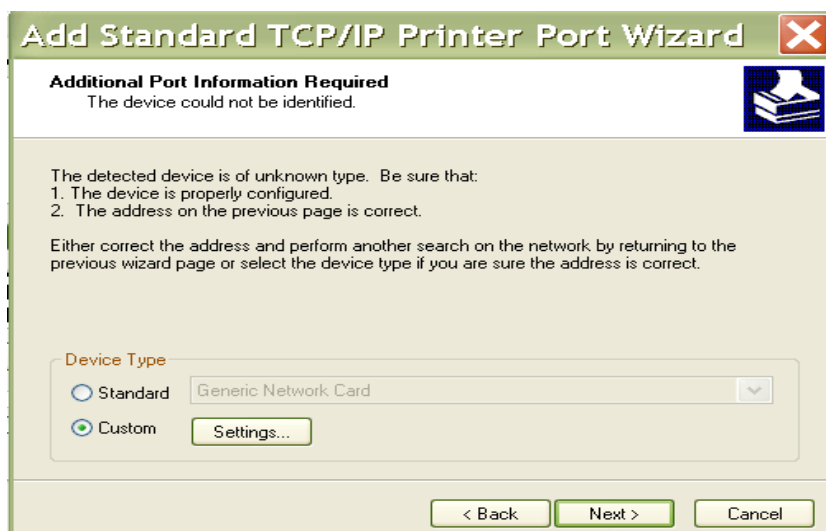

The screenshot shows the 'Add Standard TCP/IP Printer Port Wizard' window, specifically the 'Additional Port Information Required' step. The title bar includes a close button (X). The main heading is 'Additional Port Information Required' with a sub-instruction: 'The device could not be identified.' Below this is a printer icon. The text 'The detected device is of unknown type. Be sure that:' is followed by a list: '1. The device is properly configured.' and '2. The address on the previous page is correct.' Below this is a paragraph: 'Either correct the address and perform another search on the network by returning to the previous wizard page or select the device type if you are sure the address is correct.' There is a 'Device Type' section with two radio buttons: 'Standard' (selected) and 'Custom' (unselected). The 'Standard' option has a dropdown menu showing 'Generic Network Card'. The 'Custom' option has a 'Settings...' button. At the bottom are three buttons: '< Back', 'Next >', and 'Cancel'.

Add Standard TCP/IP Printer Port Wizard

Additional Port Information Required
The device could not be identified.

The detected device is of unknown type. Be sure that:

1. The device is properly configured.
2. The address on the previous page is correct.

Either correct the address and perform another search on the network by returning to the previous wizard page or select the device type if you are sure the address is correct.

Device Type

☐ Standard Generic Network Card

☒ Custom Settings...

< Back Next > Cancel

11. And click finish.

