

4 PORT AUTO MULTI-PC'S CONTROLLER



I. KEY FEATURE:

- ✧ Easy Installation - No Software Required, Computer Selection via Front Panel Switches or Hot Keys
- ✧ Windows 98, Win Me, Win2000, Win XP, Mac OS Compatible
- ✧ Menu Select and Easy Hot-Key Control
- ✧ One Console Controls 4 Computers
- ✧ LED Display For Easy Status Monitoring
- ✧ Auto Scan Mode for Monitoring All Computers


II. SPECIFICATION:

- * Description : 4 PCs to 1 Console
- * PC side : USB B Type x 4, HD-15M x 4
- * Console side MD-6F x 2
HD-15F x 1
- * Case Design Desk top
- * Dimension 180mm x 110mm x 40mm

III. PACKAGE CONTENTS:

- *AUTO MULTI-PC'S CONTROLLEP
- *User's Manual
- *Power Adapter (optional)
- *Cable (optional)

IV. APPLICATION:

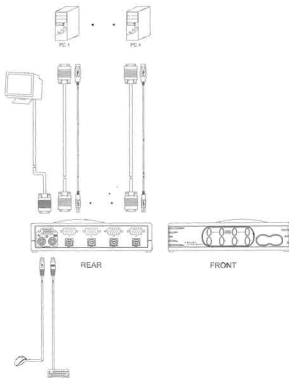

V. OPERATION:

1. First turn on the monitor than the other PC.
2. Make sure each PC is boot-up completely before switching the Multi - PC Controller.

VI. HOT-KEY:

1. To SELECT PC:



2. To activate the Auto Scan Mode:



3. To deactivate the Auto Scan Mode:

Press  on the Keyboard.

4. Adjustable the SCAN RATE:

- a. 5 sec. in Original design.

b. Press   into the Auto Scan Mode.

- c. Under AUTO SCAN mode, the LED indicator of USER KEYBOARD flashes according to different Scan Rate.
- d. Under AUTO SCAN mode, hitting <-/_> or <-> key is to adjust down the SCAN RATE.
- e. Under AUTO SCAN mode, hitting <=/+> or <+> key is to adjust up the SCAN RATE.

Table (1)

Scan Rate	NUM LOCK	CAPS LOCK	SCROLL LOCK
5 sec.	OFF	OFF	ON
10 sec.	ON	OFF	OFF
15 sec.	ON	OFF	ON
20 sec.	OFF	ON	OFF
25 sec.	OFF	ON	ON
30 sec.	ON	ON	OFF

*Note:

1. Table (1) shows the comparative list of LED light of Keyboard and the SCAN RATE.
2. If the power is turned off, the scan rate will back to the original design -5 seconds.
3. Whenever adjusting the SCAN RATE is to switch to next PC.



4 PORT AUTO MULTI-PC'S CONTROLLER

MPM077-4